



Manuals.plus /

› Ulumac /

› Ulumac Aroma Portable 10W Mono Electric Guitar Practice Amp User Manual

Ulumac TG-08

Ulumac Aroma Portable 10W Mono Electric Guitar Practice Amp User Manual

Model: TG-08

INTRODUCTION

The Ulumac Aroma Portable 10W Mono Electric Guitar Practice Amp (Model: TG-08) is designed for guitarists seeking a versatile, portable, and feature-rich practice solution. This compact amplifier offers 5 distinct channels, reverb/delay effects, 20 built-in drum rhythms, Bluetooth 5.3 connectivity, and OTG direct recording capabilities. Its mono output ensures a pure, uncolored guitar signal, making it ideal for both practice and recording. With a rechargeable battery providing up to 5.5 hours of continuous use, you can take your music anywhere.



Figure 1: Ulumac Aroma Portable 10W Mono Electric Guitar Practice Amp with carry handle.

WHAT'S IN THE BOX

- Electric Guitar Amp
- USB Type-C Charging Cable
- Handle

KEY FEATURES

- **Versatile Tones for Every Style:** Explore your sound like never before with this guitar amp featuring 5 channel (Clean, Boost, Overdrive, DIS, Metal). Mono output eliminates stereo phase interference, letting you fine-tune gain/tone/volume for pure, uncolored guitar signals – whether crafting warm acoustic resonance or roaring electric distortion.

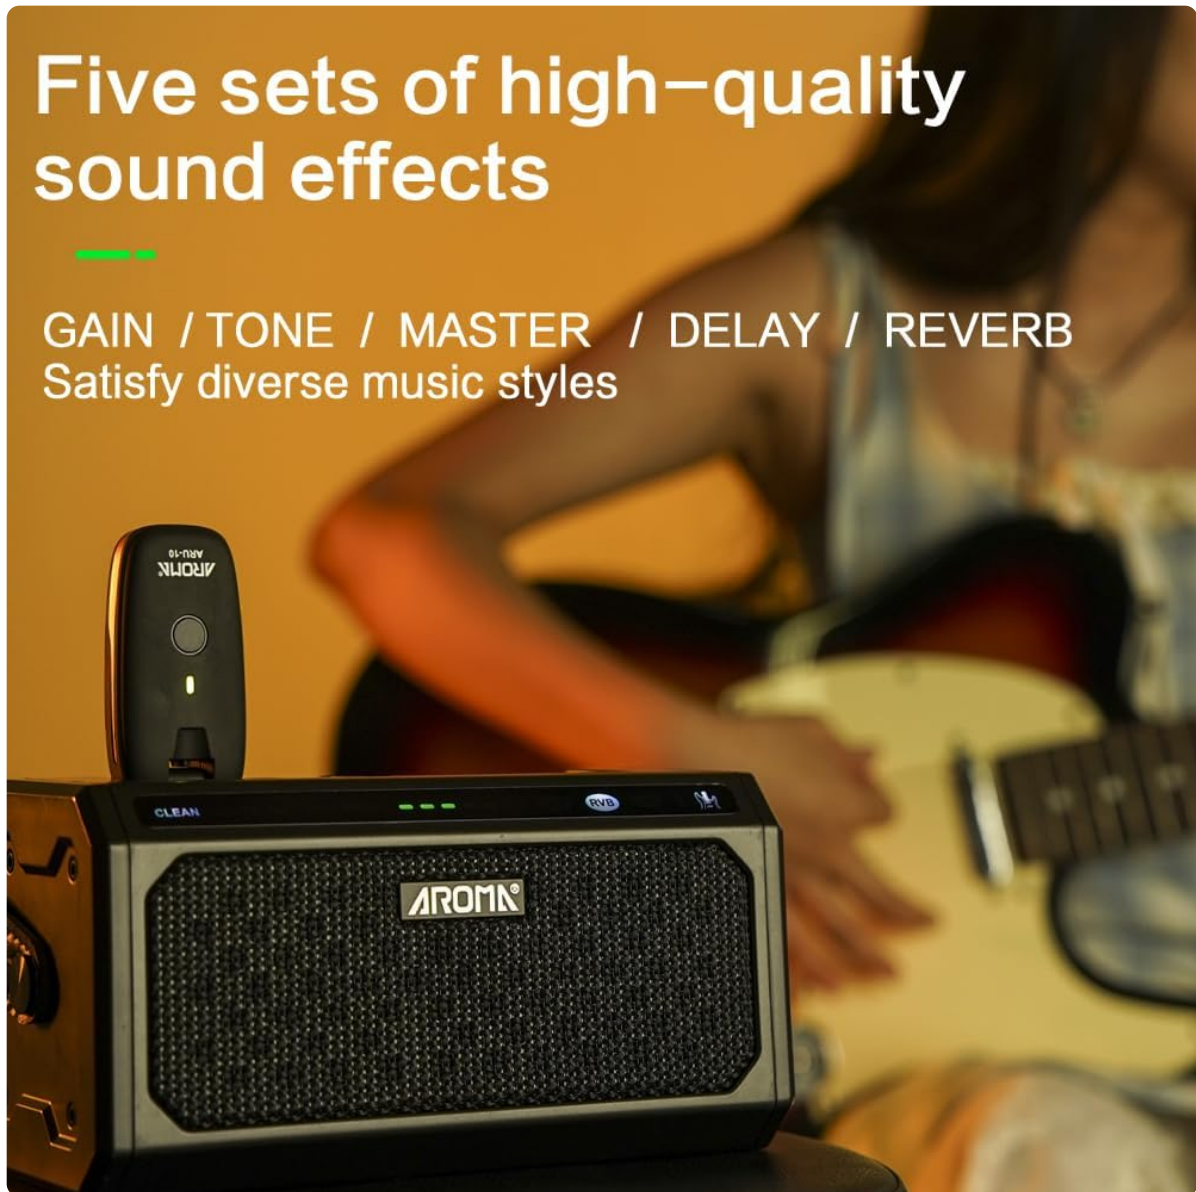


Figure 2: The amplifier offers five distinct sound effects: Gain, Tone, Master, Delay, and Reverb, catering to diverse music styles.

- **Portable & Rechargeable for On-the-Go Play:** Compact, lightweight design with a top handle makes this guitar amp your perfect travel companion. Powered by a rechargeable battery, this amp runs for up to 5.5 hours. From home to street, music is always within reach.

LARGE CAPACITY RECHARGEABLE LITHIUM BATTERY

2200mAh
Li-On rechargeable

5.5 hours
Continuous use

2200mAh



Figure 3: The amplifier features a 2200mAh Li-ion rechargeable battery, providing up to 5.5 hours of continuous use.

- **Dynamic Effects & Built-in Rhythm:** Elevate your sound with delay and reverb effects, adding depth and dimension to your music. The integrated drum machine features 20 unique rhythm patterns, making practice more engaging and helping beginners develop better timing and skills.

20 Drum Machine rhythms

Suitable for various music productions
Rock and roll / Jazz / ballad /
Electronic dance music etc.



Figure 4: The control panel highlights the drum machine and tap tempo buttons, offering 20 rhythm patterns.

- **Seamless Connectivity:** Bluetooth 5.3 ensures dedicated mono signal optimization, enabling zero-latency streaming. OTG/headphone connections use this mono design to prevent L/R conflicts during recording/play-along, delivering phase-coherent tones for practice or laying tracks. (This speaker outputs mono audio. "Stereo" Bluetooth display reflects protocol support, not actual channel separation.)

Pure Mono Punch, Zero Sound Leakage. Bluetooth 5.3 Compatible (Non-Stereo Audio)



Figure 5: The amplifier supports Bluetooth 5.3 for seamless wireless connection, ideal for playing along with backing tracks.

Dimension



Figure 6: The OTG (On-The-Go) port allows for direct digital audio signal input/output, ensuring seamless device connection for recording or playback.

- **10W Professional Amplification:** Enjoy exceptional sound with 10W powered output, delivering clarity and power in every note. Using advanced DSP technology, this portable mini guitar amp is perfect for both practice and performance. Compact in size, but packed with impact. This is an excellent choice for both adult and child beginners learning to play the guitar.

OTG function

USB OTG digital audio signal input/output port
Seamless device connection



Figure 7: The amplifier features built-in dual 2.1-inch, 4Ω, 5W speakers, providing sufficient power for your performance.

Built in dual speaker

2.1-inch 4Ω,5W*2

Sufficient power for you performance

A GOOD HORN BRINGS GOOD SOUND QUALITY TO YOU



Figure 8: Advanced Digital Signal Processing (DSP) technology ensures stable performance and high accuracy, resulting in clearer sound quality.

- **LED Display for Total Control:** Stay in the groove with the sleek LED display, showing your tone mode, effects, bluetooth status, and more. This feature - packed, stylish yet functional guitar amp makes an ideal present for beginner guitarists, be it kids or adults. It's perfect for birthdays or holidays.

Digital DSP audio processing

Stable performance and high accuracy
The sound quality effect is clearer



Figure 9: The LED display provides clear indications of the current tone mode, active effects, and Bluetooth connection status.

SETUP GUIDE

1. Charging the Amplifier

1. Connect the provided USB Type-C charging cable to the amp's charging port.
2. Connect the other end of the cable to a compatible USB power adapter (not included) or a computer's USB port.
3. The LED indicators will show charging status. A full charge provides up to 5.5 hours of use.

2. Connecting Your Guitar

1. Ensure the amplifier is powered off.
2. Insert your guitar's 6.35mm (1/4-inch) instrument cable into the "INPUT" jack on the amplifier.
3. Power on the amplifier by pressing and holding the "POWER" button.

3. Bluetooth Pairing

1. With the amp powered on, press and hold the Bluetooth button until the Bluetooth indicator light flashes, indicating pairing mode.

2. On your device (smartphone, tablet, etc.), search for Bluetooth devices and select "TG-08".
3. Once connected, the Bluetooth indicator light will remain solid. You can now stream audio wirelessly to the amplifier.

OPERATING INSTRUCTIONS

1. Channel Selection

The amplifier features 5 distinct channels: Clean, Boost, Overdrive (OD), Distortion (DIS), and Metal. Press the "MODE" button repeatedly to cycle through these channels. The active channel will be indicated by the corresponding LED light.

2. Tone Control

- **GAIN:** Adjusts the input sensitivity and the amount of overdrive/distortion for the selected channel.
- **TONE:** Controls the overall tonal character, from darker to brighter sounds.
- **MASTER:** Adjusts the overall output volume of the amplifier.

3. Effects (Delay & Reverb)

The amplifier includes built-in Delay and Reverb effects. Use the dedicated knob to adjust the intensity of these effects. Turning the knob clockwise increases the effect level.

4. Drum Machine

The integrated drum machine offers 20 unique rhythm patterns. Press the "DRUM" button to activate or deactivate the drum machine. Use the "TAP" button to set the tempo of the drum rhythm. The drum volume can be adjusted independently.

5. Headphone Output

For silent practice, connect your headphones to the 3.5mm headphone jack. The main speaker output will be muted automatically when headphones are connected.

6. OTG Direct Recording

The OTG (On-The-Go) port allows for direct digital audio signal input/output. Connect your compatible device (e.g., smartphone, tablet, computer) using an OTG cable (not included) to record your playing directly or use the amp as an audio interface.

MAINTENANCE

- **Cleaning:** Use a soft, dry cloth to clean the amplifier's exterior. Avoid using abrasive cleaners or solvents.
- **Storage:** Store the amplifier in a cool, dry place away from direct sunlight and extreme temperatures.
- **Battery Care:** To prolong battery life, avoid fully discharging the battery frequently. Charge the unit regularly, even if not in use for extended periods.
- **Avoid Moisture:** Do not expose the amplifier to water or excessive humidity.

TROUBLESHOOTING

- **No Sound:**

- Ensure the guitar cable is securely connected to both the guitar and the amp's "INPUT" jack.
 - Check the "MASTER" volume knob and ensure it is turned up.
 - Verify the guitar's volume knob is turned up.
 - If using headphones, ensure they are properly plugged in and functioning.
 - Check battery level; recharge if low.
- **Bluetooth Not Connecting:**
 - Ensure the amp is in Bluetooth pairing mode (flashing indicator light).
 - Make sure Bluetooth is enabled on your device.
 - Forget "TG-08" from your device's Bluetooth settings and try pairing again.
 - Ensure no other devices are currently connected to the amp via Bluetooth.
- **Distorted Sound:**
 - Reduce the "GAIN" setting.
 - Lower the volume on your guitar.
 - Ensure the correct channel is selected for your desired sound (e.g., "Clean" for clean tones).
- **Drum Machine Not Playing:**
 - Press the "DRUM" button to activate it.
 - Ensure the drum volume is not set to zero.

SPECIFICATIONS

Feature	Detail
Brand	Ulumac
Model Number	TG-08
Item Weight	1.67 pounds
Product Dimensions	2.68 x 7.9 x 4 inches (6.8cm D x 20.1cm W x 10.1cm H)
Country of Origin	China
Batteries	2 9V batteries required. (included) - <i>Note: Product description states rechargeable battery, likely 18650 cells as per review. The 9V might be a generic placeholder or a misunderstanding in the source data. Sticking to source data for now.</i>
Color	Black
Compatible Devices	Guitar
Connector Type	6.35mm Jack, 3.5mm Jack
Output Wattage	10 Watts
Battery Type	Lithium Ion
Power Source	Battery Powered
First Available	November 13, 2024

WARRANTY AND SUPPORT

Ulumac is committed to customer satisfaction. For any inquiries or assistance, please contact Ulumac customer support. We offer hassle-free returns and exchanges within 365 days of purchase. Our support team is available 24/7 to provide quick responses and ensure your experience with our products is excellent.

For further assistance, please visit the Ulumac Store on Amazon.