

[manuals.plus](#) /

› [ACROMA](#) /

› [ACROMA 12-Light 40-Inch Modern Farmhouse Wagon Wheel Chandelier Instruction Manual](#)

## ACROMA 12-Light 40In Wagon Wheel Chandelier

# ACROMA 12-Light 40-Inch Modern Farmhouse Wagon Wheel Chandelier Instruction Manual



### INTRODUCTION

---

Thank you for choosing the ACROMA 12-Light 40-Inch Modern Farmhouse Wagon Wheel Chandelier. This manual provides essential information for the safe installation, operation, and maintenance of your new lighting fixture. Please read these instructions thoroughly before beginning installation and retain them for future reference.



Image: The ACROMA 12-Light 40-Inch Chandelier elegantly suspended in a modern farmhouse living room setting, showcasing its design and scale.

## SAFETY INFORMATION

- **WARNING:** To avoid electric shock, ensure power is turned off at the circuit breaker before installation or servicing.
- All electrical connections must be in accordance with local codes, ordinances, and the National Electric Code (NEC). Consult a qualified electrician if you are unfamiliar with electrical wiring.
- This fixture is intended for indoor use only. Do not expose to water or moisture.
- Use only the specified bulb type and wattage to prevent fire or electrical hazard.
- Handle the fixture with care. Avoid dropping or striking the fixture, as this may cause damage.



Image: The ACROMA 12-Light Chandelier shown with a UL Certified logo, indicating compliance with safety standards.

## PACKAGE CONTENTS

Carefully unpack all components and check for any damage. Ensure all parts are present before discarding packaging materials. If any parts are missing or damaged, contact ACROMA customer support.

- Chandelier Frame (Wagon Wheel)
- Canopy and Mounting Hardware
- Adjustable Chain
- Candle Sleeves / Sockets (12 units)
- Wiring Connectors
- Instruction Manual

## TOOLS REQUIRED (NOT INCLUDED)

- 
- Phillips Head Screwdriver
  - Flat Head Screwdriver
  - Wire Strippers
  - Pliers
  - Electrical Tape
  - Ladder
  - Safety Glasses

## SETUP AND INSTALLATION

---

Before beginning installation, ensure the power is disconnected at the circuit breaker. It is recommended to have two people for installation.

### Step 1: Prepare for Installation

1. Turn off power at the main circuit breaker.
2. Carefully remove the old fixture (if applicable) and disconnect all wiring.
3. Unpack your new chandelier and lay out all parts on a clean, flat surface.

### Step 2: Install Mounting Plate and Canopy



Image: A detailed view of the chandelier's brass-finished canopy and the black mounting plate with wiring connections.

1. Attach the mounting plate to the junction box in the ceiling using the provided screws. Ensure it is securely fastened.
2. Determine the desired hanging height for your chandelier. The fixture offers an adjustable height from 40 inches to 138 inches. Adjust the chain length accordingly by removing links if necessary.
3. Thread the fixture wires through the chain and canopy.



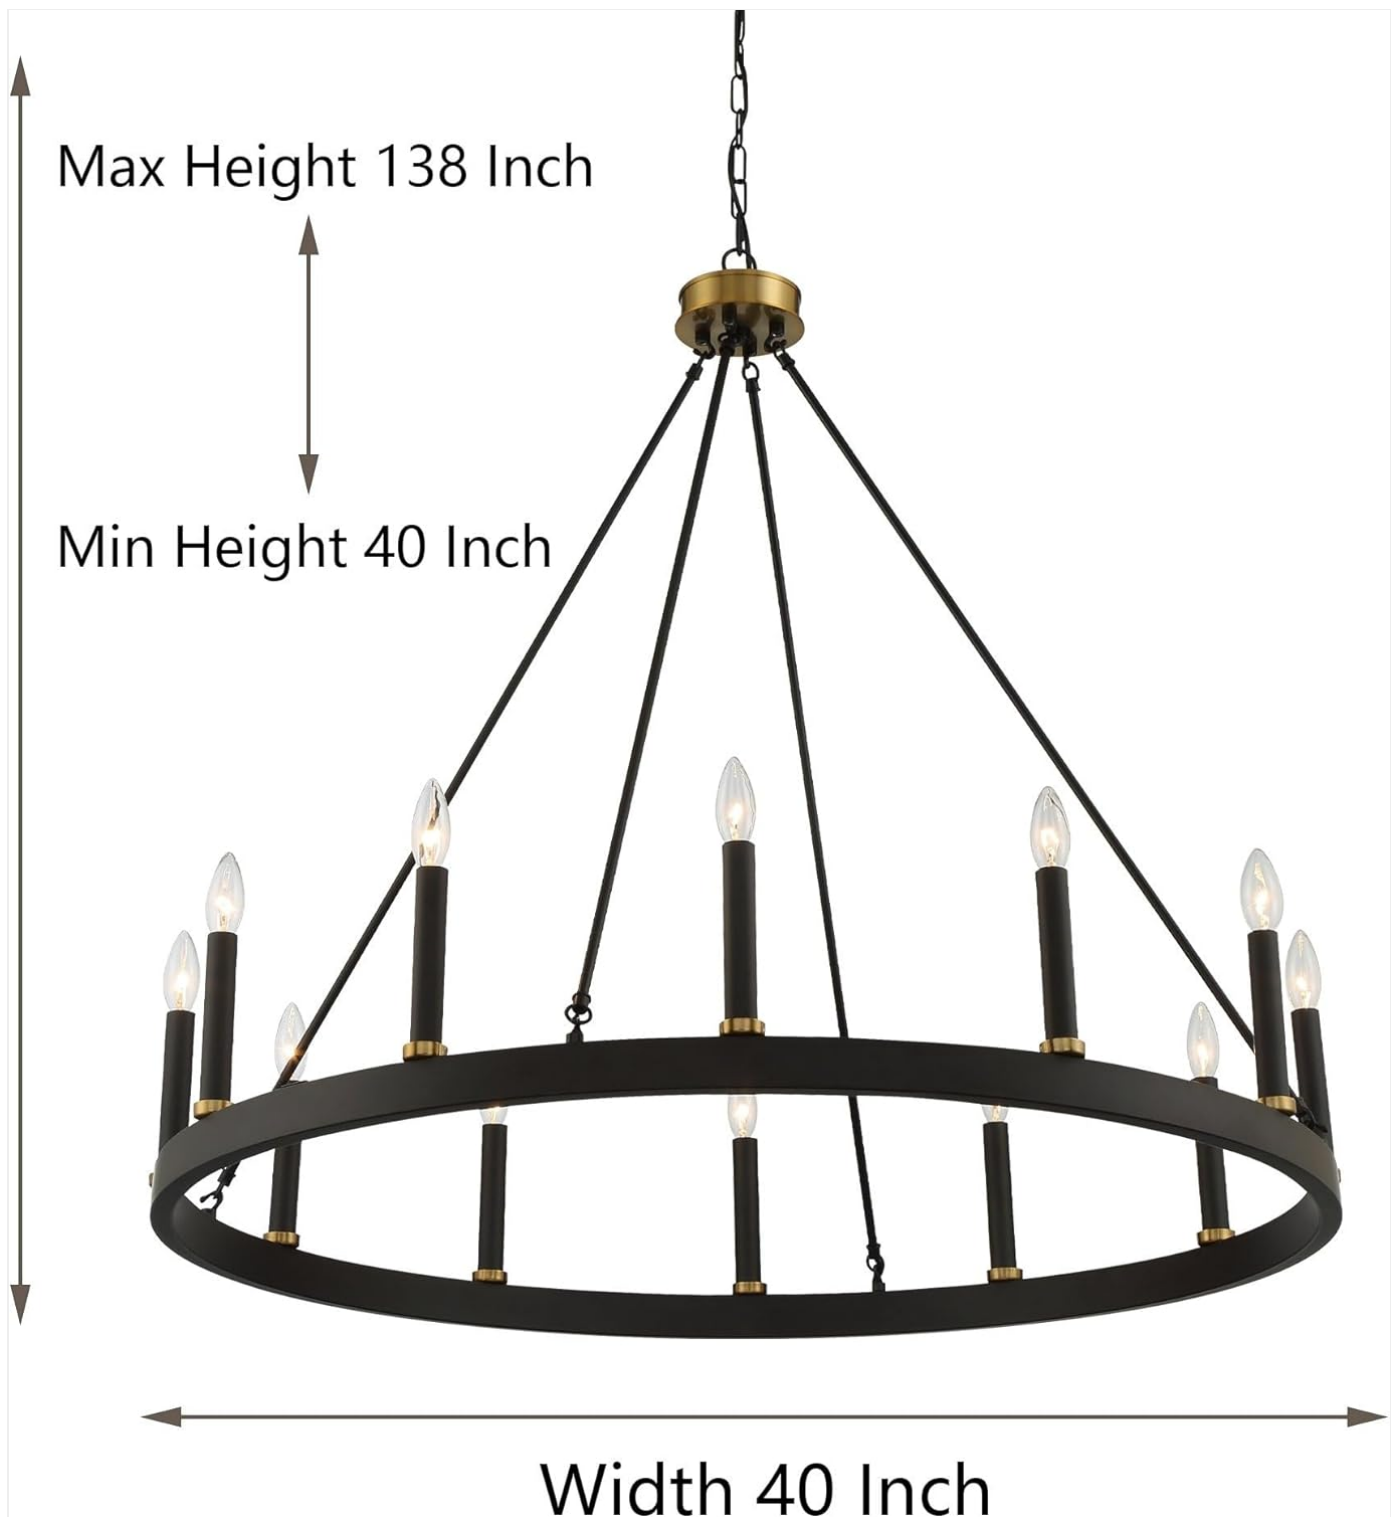


Image: A diagram illustrating the key dimensions of the chandelier, including a 40-inch width, a minimum hanging height of 40 inches, and a maximum hanging height of 138 inches.

### Step 3: Wiring Connections

1. Connect the fixture's ground wire (usually bare copper or green) to the house supply ground wire using a wire connector.
2. Connect the fixture's neutral wire (usually white) to the house supply neutral wire (white) using a wire connector.
3. Connect the fixture's hot wire (usually black) to the house supply hot wire (black) using a wire connector.
4. Carefully tuck all wires into the junction box.

### Step 4: Secure the Fixture

1. Raise the canopy to the ceiling and secure it to the mounting plate with the provided screws.

2. Ensure the fixture is firmly attached and stable.

## Step 5: Install Bulbs



Image: A close-up view of the chandelier's candle-style light sockets, showing the detail of the black candle sleeves and brass accents with clear bulbs installed.

1. Screw in 12 E12 base (candelabra) bulbs (not included) into the sockets. Do not exceed the maximum wattage specified in the specifications section.
2. Restore power at the circuit breaker and test the fixture.

## OPERATING INSTRUCTIONS

---

Once installed and powered, the ACROMA Chandelier operates like any standard lighting fixture. Use a wall switch to turn the lights on and off.

- **Bulb Type:** Requires 12 E12 Candelabra base bulbs.
- **Dimmable:** This fixture is dimmable when used with dimmable bulbs and a compatible dimmer switch (both sold separately).

## MAINTENANCE

- **Cleaning:** To clean the fixture, turn off the power and allow it to cool. Wipe with a soft, dry cloth. Do not use abrasive cleaners or solvents, as they may damage the finish.
- **Bulb Replacement:** Ensure power is off and bulbs are cool before replacing. Unscrew old bulbs and screw in new ones of the correct type and wattage.
- **Inspection:** Periodically check all connections and mounting hardware to ensure they remain secure.

## TROUBLESHOOTING

Problem	Possible Cause	Solution
Light does not turn on.	<ul style="list-style-type: none"><li>• Power is off at the circuit breaker.</li><li>• Loose wire connections.</li><li>• Faulty bulb(s).</li><li>• Faulty wall switch.</li></ul>	<ul style="list-style-type: none"><li>• Check the circuit breaker and ensure power is on.</li><li>• Turn off power, check and secure all wire connections.</li><li>• Replace bulb(s) with new ones.</li><li>• Consult a qualified electrician to inspect the switch.</li></ul>
Flickering lights.	<ul style="list-style-type: none"><li>• Loose bulb(s).</li><li>• Incorrect bulb type for dimmer (if applicable).</li><li>• Loose wire connections.</li></ul>	<ul style="list-style-type: none"><li>• Tighten bulbs.</li><li>• Ensure dimmable bulbs are used with a compatible dimmer.</li><li>• Turn off power, check and secure all wire connections.</li></ul>

## SPECIFICATIONS

- **Model:** ACROMA 12-Light 40-Inch Wagon Wheel Chandelier
- **Brand:** ACROMA
- **ASIN:** B0DN66272K
- **Dimensions:** 40 inches (Diameter), Adjustable Height (Min 40 inches, Max 138 inches)
- **Number of Lights:** 12
- **Bulb Base:** E12 Candelabra
- **Max Wattage per Bulb:** 60W (Incandescent equivalent, LED recommended)
- **Voltage:** 120V
- **Material:** Metal
- **Finish:** Black with Gold Accents
- **Certification:** UL Certified







## WARRANTY AND SUPPORT

ACROMA products are manufactured to high-quality standards. For specific warranty information or technical support, please refer to the warranty card included with your purchase or visit the official ACROMA website. If you have any questions or require assistance, please contact ACROMA customer service.

**Contact Information:** Please refer to your purchase documentation or the ACROMA brand store on Amazon for the most current contact details.



## Related Documents - 12-Light 40In Wagon Wheel Chandelier

	<p><a href="#">ACROMA 6409 Installation Instructions and Warranty</a></p> <p>Comprehensive installation guide and warranty information for the ACROMA 6409 fixture, including safety precautions, required tools, and assembly steps.</p>
	<p><a href="#">ACROMA 30412BGCR Installation Manual - Agen 12-Light Chandelier</a></p> <p>Detailed installation instructions and safety information for the ACROMA Agen 12-Light Satinbrass Farmhouse Chandelier (Model 30412BGCR). Includes hardware list and step-by-step assembly guide.</p>
	<p><a href="#">ACROMA 2081412 Chandelier Installation Guide</a></p> <p>Official installation instructions for the ACROMA 2081412 chandelier, including safety information, hardware list, and step-by-step assembly guidance.</p>
	<p><a href="#">ACROMA 7615AZ Chandelier Installation Instructions</a></p> <p>Detailed installation guide for the ACROMA 7615AZ 15-light chandelier, including safety precautions, hardware list, and step-by-step assembly instructions.</p>
	<p><a href="#">Acroma 6-Light Modern Sputnik Chandelier Installation Instructions</a></p> <p>Detailed installation instructions for the Acroma 6-Light Modern Sputnik Chandelier in Aged Zinc, including safety information, hardware details, and assembly steps.</p>
	<p><a href="#">ACROMA 9610WW Chandelier Installation Instructions</a></p> <p>Comprehensive installation guide for the ACROMA 9610WW chandelier, including pre-installation steps, safety warnings, hardware list, and assembly instructions. Learn how to safely install your new ACROMA lighting fixture.</p>