

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› **INFUTURE** /

› **INFUTURE Wearable Bluetooth Speaker BH127AG User Manual**

INFUTURE BH127AG

INFUTURE Wearable Bluetooth Speaker BH127AG User Manual

Model: BH127AG

1. INTRODUCTION

This manual provides detailed instructions for the proper use and maintenance of your INFUTURE Wearable Bluetooth Speaker BH127AG. Please read this manual thoroughly before using the product to ensure optimal performance and longevity. Keep this manual for future reference.

2. PRODUCT OVERVIEW

2.1 Package Contents

- INFUTURE Wearable Bluetooth Speaker BH127AG
- Power Cable (USB-C)
- User Manual

2.2 Speaker Components and Controls

Familiarize yourself with the speaker's layout and controls as shown below:



Image: Front view of the INFUTURE Wearable Bluetooth Speaker BH127AG, highlighting the speaker grille, main control buttons, and integrated flashlight.

Easy to understand

easy to operate button with gloves

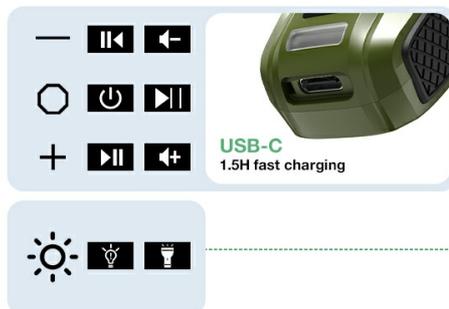


Image: Detailed diagram illustrating the function of each button: Volume Down/Previous Track (-), Multi-Function Button (MFB) for Power/Play/Pause/Call, Volume Up/Next Track (+), USB-C charging port, and Flashlight control button.

- (-) **Button:** Volume Down / Previous Track
- **MFB (Multi-Function Button):** Power On/Off, Play/Pause, Answer/End Call, Activate Voice Assistant
- (+) **Button:** Volume Up / Next Track

- **Flashlight Button:** Control Flashlight modes
- **USB-C Port:** For charging the speaker
- **Clip:** For attaching the speaker to clothing or gear

3. SETUP

3.1 Charging the Speaker

Before first use, fully charge the speaker. Use the provided USB-C cable to connect the speaker to a compatible USB power source (e.g., computer USB port, wall adapter).



Image: The INFUTURE speaker connected to a USB-C charging cable, illustrating the charging process. A full charge provides approximately 15 hours of playtime.

- A full charge takes approximately 1.5 hours.
- The speaker provides over 15 hours of playtime (up to 18 hours at 80% volume).
- The LED indicator will show charging status (e.g., red for charging, off for fully charged).

3.2 Bluetooth Pairing

1. **Power On:** Press and hold the MFB button for 2-3 seconds until you hear an audible prompt and the LED indicator flashes, indicating it's in pairing mode.
2. **Activate Bluetooth:** On your device (smartphone, tablet, laptop), enable Bluetooth.
3. **Select Speaker:** In your device's Bluetooth settings, search for available devices and select "INFUTURE BH127AG" (or similar name).
4. **Confirm Connection:** Once paired, the speaker will provide an audible confirmation, and the LED indicator will change (e.g., solid blue).
5. **Reconnect:** The speaker will automatically attempt to reconnect to the last paired device when powered on.

4. OPERATING INSTRUCTIONS

4.1 Power On/Off

- **Power On:** Press and hold the MFB button for 2-3 seconds.
- **Power Off:** Press and hold the MFB button for 2-3 seconds.

4.2 Music Playback

- **Play/Pause:** Short press the MFB button.
- **Volume Up:** Short press the (+) button.
- **Volume Down:** Short press the (-) button.
- **Next Track:** Long press the (+) button.
- **Previous Track:** Long press the (-) button.

4.3 Call Management

The speaker features a built-in noise-canceling microphone for clear hands-free calls.

- **Answer Call:** Short press the MFB button when a call comes in.
- **End Call:** Short press the MFB button during a call.
- **Reject Call:** Long press the MFB button when a call comes in.



Senior Friendly

Built-in microphone for clear and loud call quality

Image: A man and woman enjoying audio from the speaker, demonstrating its use for clear calls and audio playback in social settings.

4.4 Voice Assistant Activation

Activate your device's voice assistant (Siri, Google Assistant, Alexa) directly from the speaker.

- **Activate Voice Assistant:** Double-tap the MFB button.

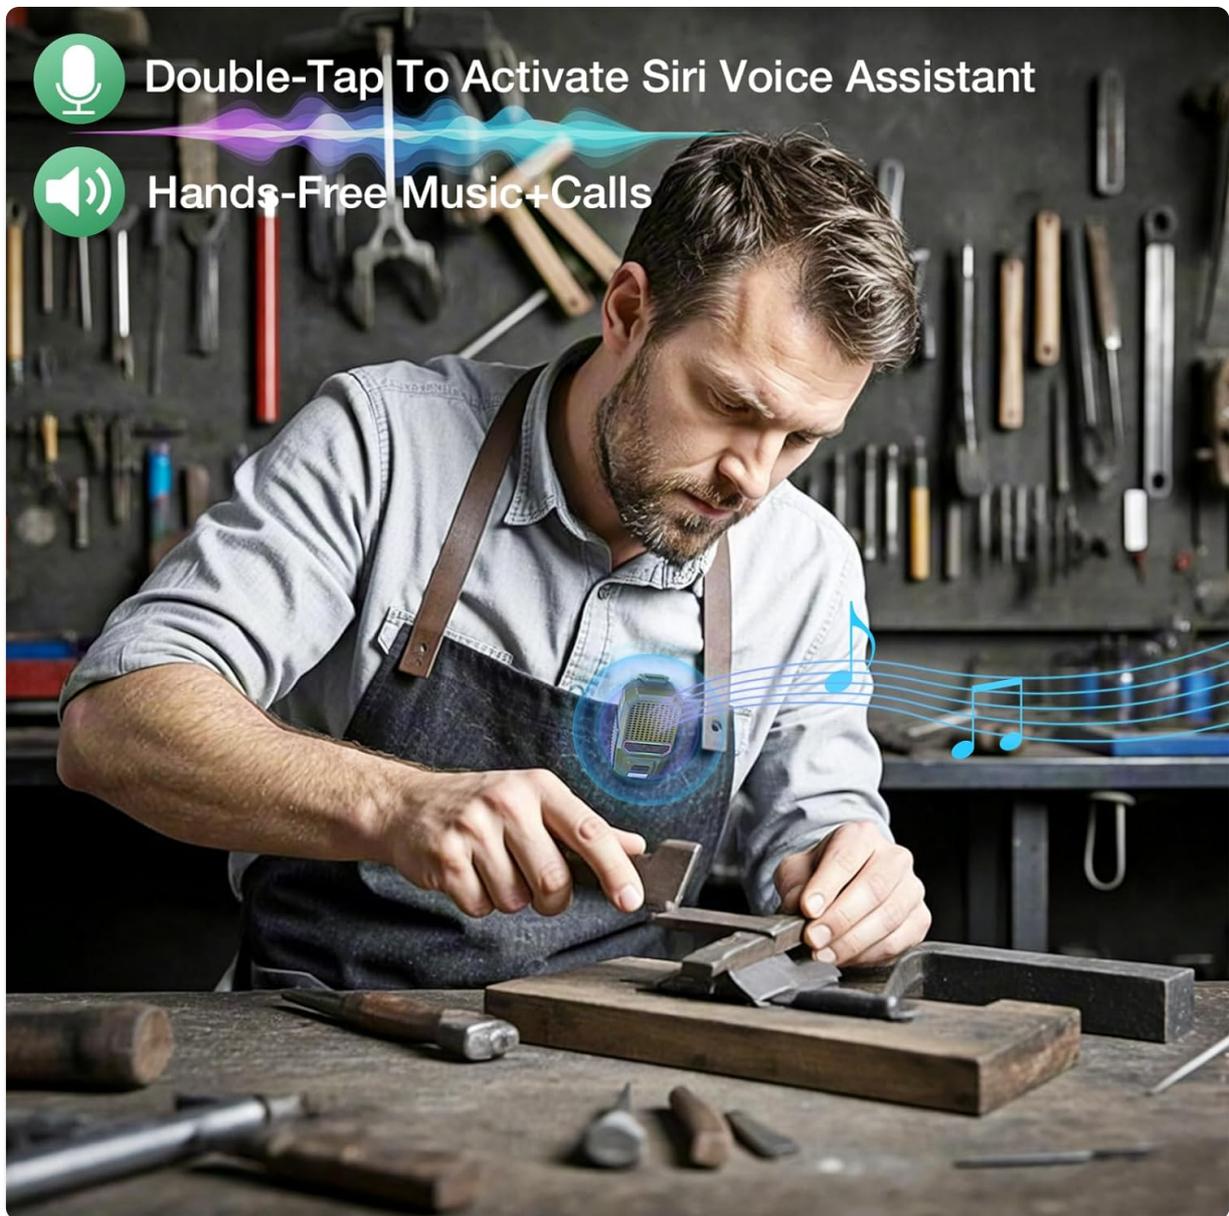


Image: A person using the speaker while working, illustrating the convenience of activating a voice assistant for hands-free control of music or calls.

4.5 Flashlight Operation

The speaker includes a 2-level LED flashlight for illumination.

- **Turn On/Off Flashlight:** Short press the Flashlight button.
- **Change Brightness Level:** Short press the Flashlight button again to cycle through brightness levels.

2 Level Led Light

Easy to carry when going out at night
can easily light up the dark area



Image: A person running outdoors at night, demonstrating the speaker's integrated flashlight providing illumination for safety and visibility.



80-LUMEN LED WORK LIGHT

This speaker provides bright, reliable lighting for any task. It ensures that you always have enough light on hand to work with. 6-10H battery life (When using LED lights)

Image: A detailed view of the speaker's 80-lumen LED work light, highlighting its capability to provide reliable lighting for various tasks. The flashlight offers 6-10 hours of battery life when in use.

4.6 RGB Light Modes

The speaker features a 2-mode RGB light for visual enhancement.

- **Switch RGB Modes:** Long press the Flashlight button for 2-3 seconds to cycle between the two RGB light modes.



Image: Two INFUTURE speakers showcasing their multi-color RGB light feature, which can be adjusted to enhance the listening experience.

4.7 Wearing the Speaker

The speaker is designed with a reinforced anti-slip clip for secure attachment.

- Attach the clip to shirts, backpacks, belts, or other gear for hands-free audio.
- Ensure the speaker is securely fastened to prevent accidental drops.

Wear It Any time Any where



Image: Examples of the speaker being worn by individuals engaged in various activities, demonstrating its versatility and secure clip-on design for hands-free use.

5. MAINTENANCE

To ensure the longevity and optimal performance of your speaker, follow these maintenance guidelines:

- **Cleaning:** Wipe the speaker with a soft, dry cloth. Do not use abrasive cleaners or solvents.
- **Water Resistance:** The speaker is IPX6 waterproof and dustproof, meaning it can withstand strong jets of water and dust ingress. However, it is not designed for submersion. Ensure the USB-C port cover is securely closed when exposed to water or dust.

IPX6 Waterproof



Image: The INFUTURE speaker being splashed with water, visually representing its IPX6 waterproof and dustproof capabilities, suitable for outdoor use.

- **Storage:** Store the speaker in a cool, dry place away from extreme temperatures and direct sunlight.
- **Battery Care:** To preserve battery life, charge the speaker regularly, even if not in frequent use. Avoid fully depleting the battery for extended periods.

6. TROUBLESHOOTING

If you encounter issues with your speaker, refer to the following common problems and solutions:

- **Speaker does not power on:**
 - Ensure the speaker is charged. Connect it to a power source using the USB-C cable.
 - Press and hold the MFB button for 2-3 seconds to power on.
- **Cannot pair with device:**
 - Ensure the speaker is in pairing mode (LED flashing).
 - Make sure Bluetooth is enabled on your device and it is within range (up to 10 meters).
 - Forget the speaker from your device's Bluetooth list and attempt to pair again.
 - Restart both the speaker and your device.
- **No sound or low volume:**
 - Increase the volume on both the speaker and your connected device.
 - Ensure the speaker is properly paired and connected to your device.
 - Check if the audio source is playing correctly.
- **Flashlight not working:**
 - Ensure the speaker has sufficient battery charge.
 - Short press the Flashlight button to activate.

7. SPECIFICATIONS

Feature	Specification
Model Name	BH127AG

Brand	INFUTURE
Connectivity Technology	Bluetooth 5.4
Wireless Communication Range	Up to 10 meters (33 feet)
Speaker Type	Built-In
Speaker Maximum Output Power	10 Watts
Audio Output Mode	Stereo
Frequency Response	20 KHz
Special Features	Built-in Microphone, Dustproof, LED Light, Portable, Waterproof (IPX6), RGB Light
Compatible Devices	Laptop, MP3 Player, Smartphone, Tablet
Power Source	Battery Powered
Battery Life (Playtime)	15+ hours (18H at 80% volume)
Charging Time	Approx. 1.5 hours (USB-C)
Flashlight Output	80 Lumens
Item Weight	0.09 Kilograms (3.2 ounces)
Product Dimensions	1.97"D x 1.18"W x 3"H
Control Method	Voice, Button

8. WARRANTY AND SUPPORT

8.1 Limited Warranty

The INFUTURE Wearable Bluetooth Speaker BH127AG comes with a limited warranty. Please refer to the warranty card included in your package or contact INFUTURE customer support for details regarding warranty coverage and terms.

8.2 Customer Support

For any questions, technical assistance, or warranty claims, please contact INFUTURE customer support through the retailer where you purchased the product or visit the official INFUTURE website for contact information.

