

[Manuals.plus](#) /

> [Gonyado](#) /

> Gonyado 52-inch Black Low Profile Ceiling Fan with Lights and Remote User Manual

Gonyado #8900X

Gonyado 52-inch Black Low Profile Ceiling Fan with Lights and Remote User Manual

Model: #8900X

1. PRODUCT OVERVIEW

This manual provides detailed instructions for the installation, operation, and maintenance of your Gonyado 52-inch Black Low Profile Ceiling Fan with Lights and Remote. This modern flush mount ceiling fan features a quiet DC motor, 6 adjustable speeds, reversible functionality for year-round comfort, and an integrated LED light with dimming and color temperature control.



Image: Key features of the Gonyado 52-inch ceiling fan, highlighting its quiet operation, reversible DC motor, adjustable light colors, multiple speed settings, and dual control options (remote and app).

2. SAFETY INFORMATION

Please read all instructions carefully before beginning installation. Failure to follow these instructions may result in electric shock, fire, or personal injury.

- **Electrical Safety:** All electrical wiring must be performed by a qualified electrician and conform to all local and national electrical codes. Disconnect power at the circuit breaker before installation or servicing.
- **Mounting:** Ensure the mounting structure can support a minimum of 45 kg (100 lbs) to prevent the fan from falling. This fan is designed for flush mount installation on flat ceilings only. It is not suitable for sloped ceilings.
- **Blade Clearance:** Ensure there is at least 7 feet (2.13 meters) of clearance from the floor to the fan blades.
- **Ventilation:** Do not operate the fan in areas with high humidity or direct exposure to rain.
- **Children and Pets:** Keep children and pets away from the fan during operation and installation.

3. PACKAGE CONTENTS

Carefully unpack all components and ensure you have received all items listed below. If any parts are missing or damaged, contact customer support before proceeding with installation.

- Fan Motor Assembly
- Fan Blades (6 pieces, double-sided black/wood grain)
- LED Light Kit
- Mounting Bracket
- Remote Control (2 AAA batteries included)
- Hardware Pack (screws, wire nuts, washers, etc.)
- Instruction Manual



Image: The complete Gonyado 52-inch ceiling fan unit, along with the remote control and examples of the double-sided fan blades.


4. SETUP AND INSTALLATION

Follow these steps carefully for proper installation. It is recommended to have a second person assist during installation due to the size and weight of the fan. If you are unsure about any part of the installation, consult a qualified electrician.

4.1 Pre-Installation Checks

1. Turn off power at the main circuit breaker.
2. Ensure the electrical box is securely mounted and rated for ceiling fan support (minimum 45 kg / 100 lbs).
3. Verify that the ceiling is flat and suitable for flush mount installation. This model is not designed for angled ceilings.

PRODUCT DIMENSION

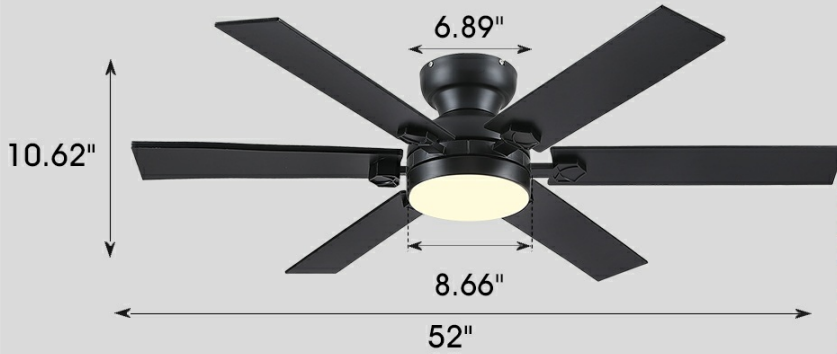

| | |
|---------------------|---|
| Material | Iron+Acrylic+plastic |
| Light Source | LED 20w |
| Motor | 25W DC motor(Input Voltage 90~265v) |
| Control | Remote/APP |
| Reversibile | Yes |
| Place | Living Room/Bedroom/Dining Room/ Kitchen etc |

Image: Product dimensions and a visual guide indicating that the fan is suitable for flat ceiling mounts only, not angled mounts.

4.2 Mounting the Fan

1. Attach the mounting bracket to the electrical box using the provided screws and washers. Ensure it is firmly secured.
2. Assemble the fan blades to the motor housing. Note that the blades are double-sided (black and wood grain); choose your preferred side before attachment. The screws for the blades are inserted from above, so it is recommended to attach them before lifting the main fan assembly.
3. Connect the electrical wires (live, neutral, ground) from the ceiling to the fan's wiring, following the color codes in the included manual. Use wire nuts to secure connections.
4. Carefully lift the fan assembly and secure it to the mounting bracket. Ensure all screws are tightened.
5. Install the LED light kit to the bottom of the fan assembly.

DOUBLE-SIDED BLADES FOR DIFFERENT STYLES



Image: Illustration of the double-sided fan blades, offering both black and wood grain options to match different decor styles.

4.3 Remote Control Pairing & APP Setup

1. After installation and restoring power, insert the included AAA batteries into the remote control.
2. To pair the remote: Within 30 seconds of turning on the power to the fan, press and hold the 'Setup' button on the remote for 5 seconds until the fan light blinks, indicating successful pairing.
3. For APP control: Scan the QR code below to download the 'Fan Lamp Pro' application. Follow the in-app instructions to connect your fan.

Remote Control



Image: Remote control and QR codes for the installation video (<https://www.jasonghost.com/fanlamppro/>) and the Fan Lamp Pro app (<https://f.afbkw.cn/k6ji9v>).

5. OPERATING INSTRUCTIONS

Your Gonyado ceiling fan can be controlled via the included remote control or the 'Fan Lamp Pro' smartphone application.

5.1 Fan Speed Control

The fan offers 6 adjustable speeds to suit various comfort levels and room sizes.

- **Speeds 1-2:** Gentle breeze, ideal for sleep or minimal air circulation.
- **Speeds 3-4:** Natural wind, suitable for family activities.
- **Speeds 5-6:** Cool wind, effective for rapid cooling, especially in summer.



Image: Visual representation of the 6-speed settings and their suitability for different scenarios, including summer and winter modes.

5.2 Reversible Function

The fan features a reversible DC motor, allowing you to change the direction of blade rotation for seasonal comfort.

- **Downdraft Mode (Summer):** Blades rotate counter-clockwise, pushing cool air downwards to create a cooling effect.
- **Updraft Mode (Winter):** Blades rotate clockwise, drawing air upwards to circulate warm air evenly throughout the room.

reversible air circulation

cool in summer and warm in winter



Image: Illustration of the fan's reversible function, showing downdraft mode for summer cooling and updraft mode for winter heat circulation.

5.3 Light Control

The integrated LED light offers adjustable brightness and color temperature.

- **3 Color Temperatures:** Switch between White Light (6000K), Natural Light (4500K), and Warm Light (3000K).
- **Stepless Dimming:** Adjust brightness from 0% to 100% to create the desired ambiance.
- **Memory Function:** The fan remembers your last light setting when turned off and on.

High Quality Bright Lights




Brightness adjustment



0%

100%

Intelligent stepless color temperature adjustment



White Light

Natural Light

Warm Light



Image: Visual guide to the fan's lighting features, including stepless dimming and the three selectable color temperatures.

5.4 Timer Function

Set the fan to automatically turn off after 2 hours using the timer function on the remote or app.

6. MAINTENANCE

Regular maintenance ensures optimal performance and longevity of your ceiling fan.

- **Cleaning:** Dust the fan blades and motor housing periodically with a soft, damp cloth. Do not use abrasive cleaners or solvents.
- **Blade Inspection:** Check blade screws for tightness annually. Loose blades can cause wobbling and noise.
- **Electrical Connections:** Periodically inspect all electrical connections for any signs of wear or loosening. Ensure power is off at the circuit breaker before inspection.

7. TROUBLESHOOTING

If you encounter issues with your fan, refer to the following common problems and solutions:

- **Fan Does Not Operate:**
 - Check if the power supply is on at the circuit breaker.
 - Ensure all electrical connections are secure.
 - Verify the remote control batteries are correctly inserted and charged.
 - Re-pair the remote control with the fan (refer to Section 4.3).
 - Ensure any motor 'blocker' or shipping material has been removed from the motor assembly (consult the physical manual for details).
- **Fan Wobbles:**
 - Check that all blade screws are tightened securely.
 - Ensure the mounting bracket is firmly attached to the ceiling electrical box.
 - Verify that the fan is installed on a flat ceiling.
- **Light Does Not Work:**
 - Check electrical connections to the light kit.
 - Ensure the light function is enabled on the remote or app.

- **Remote Control Not Responding:**

- Replace remote control batteries.
- Re-pair the remote control with the fan (refer to Section 4.3).

If problems persist after attempting these troubleshooting steps, please contact Gonyado customer support.

8. SPECIFICATIONS

| Feature | Specification |
|------------------------------|---|
| Brand | Gonyado |
| Model Number | #8900X |
| Product Dimensions | 52"L x 52"W x 10.62"H |
| Item Weight | 13 Pounds |
| Color | Black/Grain |
| Material | Acrylic, Engineered Wood, Iron |
| Motor Type | DC Motor (90~265 Volt compatible) |
| Number of Blades | 6 |
| Fan Speeds | 6 |
| Light Source Type | LED |
| Brightness | 3250 Lumen (Max) |
| Wattage | 45 watts (Fan), 28 watts (Light) |
| Control Method | Remote Control, App Control |
| Special Features | Adjustable Color Temperature, Dimmable, Energy Efficient, Timer, Reversible |
| Installation Type | Flush Mount |
| Estimated Yearly Energy Cost | \$5 (Based on 12 cents per kWh and 6.4 hours use per day, excluding lights) |
| Airflow | 3,572 Cubic Feet Per Minute |
| Airflow Efficiency | 182 Cubic Feet Per Minute Per Watt |

ENERGYGUIDE

Estimated
Yearly Energy Cost

\$5

\$3

\$34

Cost Range of Similar Models (19" – 84")

- Based on 12 cents per kWh and 6.4 hours use per day
- **Your cost depends on rates and use**
- Energy Use: 20Watts

Airflow

3,572

Cubic Feet Per Minute

- The higher the airflow, the more air the fan will move
- Airflow Efficiency: 182Cubic Feet Per Minute Per Watt

All estimates based on typical use, excluding lights

[ftc.gov/energy](https://www.ftc.gov/energy)

Image: Energy Guide label providing estimated yearly energy cost and airflow metrics for the fan.

9. WARRANTY AND SUPPORT

Goniyado provides a **one-year quality warranty** for this product. We also offer free replacement service for any damage or quality problems encountered within the warranty period.

If you have any questions, require assistance with installation, or need troubleshooting support, please do not hesitate to contact our customer service team. We are committed to providing a satisfactory answer within 24 hours.

Customer Support Contact: Please refer to the contact information provided in your product packaging or on the official Goniyado website.