Feit Electric WORK1000/FOLD/BAT

Feit Electric Portable LED Work Light Instruction Manual

Model: WORK1000/FOLD/BAT

PRODUCT OVERVIEW

The Feit Electric WORK1000/FOLD/BAT Portable LED Work Light is designed for versatile illumination in various environments, from workshops to outdoor settings. This powerful LED light offers multiple brightness levels, a rotating head, and various mounting options for hands-free operation. It is built for durability and convenience, featuring a rechargeable battery and weatherproof construction.





Figure 1: Front view of the Feit Electric Portable LED Work Light.

Key Features:

- Multiple Lighting Options: Three adjustable light modes (1000, 500, and 200 lumens) for varied tasks.
- 360° Rotating Head: Allows precise light direction.
- Adjustable Hinge: Enables optimal positioning for standing, hanging, or wall-mounting.
- Long-Lasting Power Supply: Rechargeable lithium-ion battery (3000mAh) with USB Type-C charging, providing up to 8 hours of continuous use.
- Durable & Weatherproof Design: Metal housing built to withstand outdoor elements.
- Versatile Mounting: Includes a hanging hook and magnetic backing for hands-free use.

SETUP

1. Initial Charging:

Before first use, fully charge the work light. Locate the USB Type-C charging port on the back of the unit. Open the protective lid covering the ports. Connect the included USB Type-C cable to the charging port and plug the other end into a compatible USB power source (e.g., wall adapter, car charger, power bank). The charging indicator lights will illuminate to show charging status.

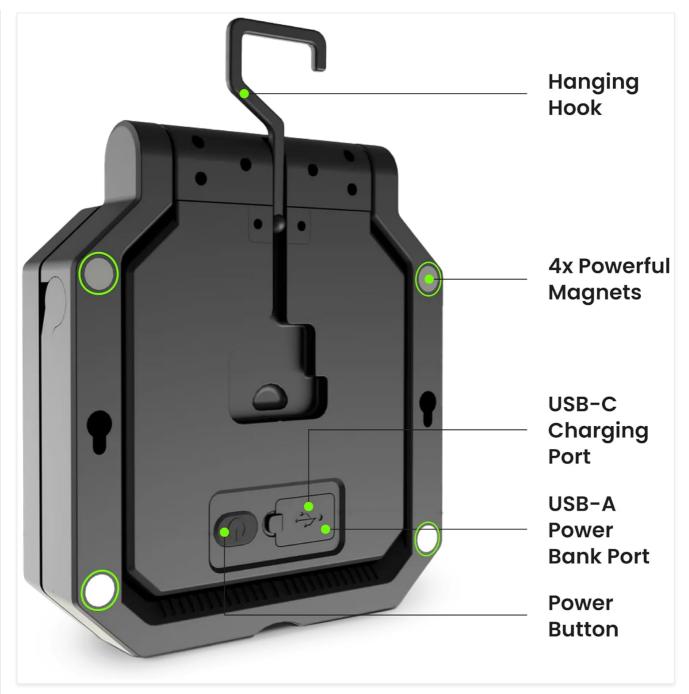


Figure 2: Rear view with charging ports and controls.

2. Positioning the Work Light:

- Standing: Unfold the integrated legs to create a stable base. Adjust the hinge to angle the light as needed.
- **Hanging:** Extend the built-in hanging hook located at the top of the unit. Hang the light from a suitable fixture or surface.
- Magnetic Mounting: Utilize the powerful magnets on the back of the unit to attach it to any metallic surface for hands-free illumination.


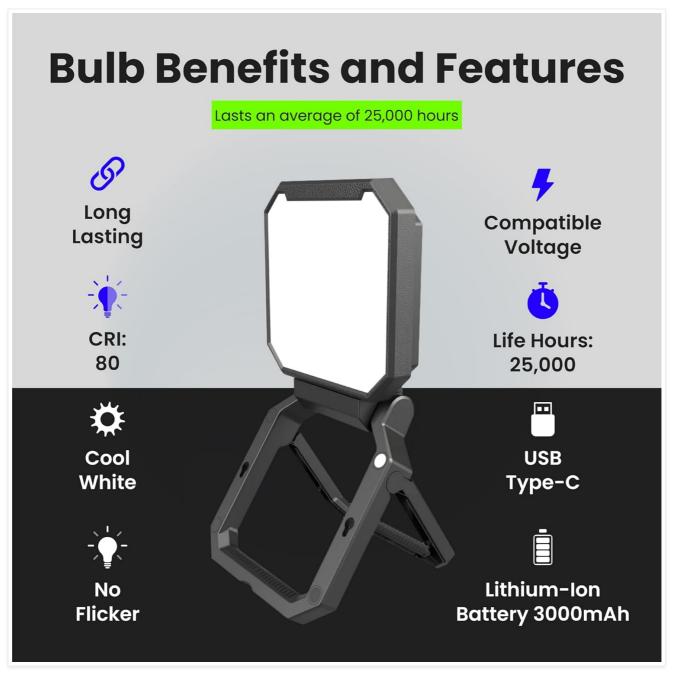


Figure 3: Adjustable features for versatile positioning.

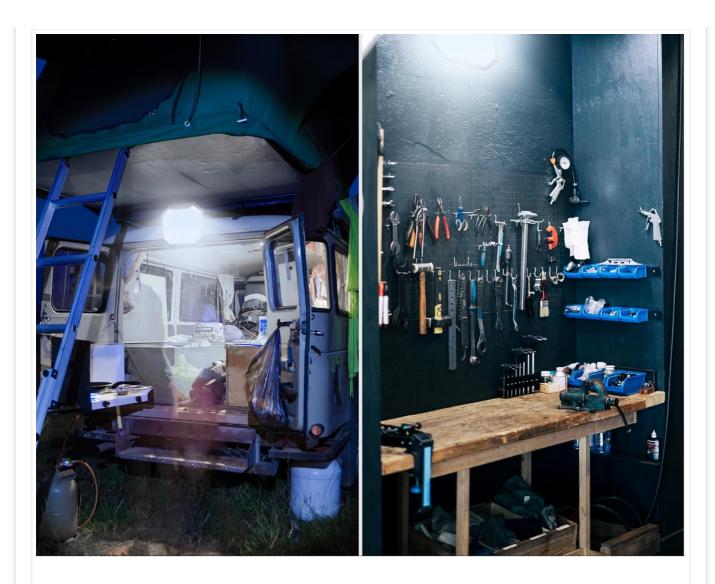

Multiple Mounting Options

Hang, mount, or stick for hands-free use.

Figure 4: Examples of multiple mounting options.

OPERATING INSTRUCTIONS

1. Power On/Off:


Press the power button located on the back of the unit to turn the light on. Press it again to cycle through the brightness modes and to turn it off.

2. Adjusting Brightness Modes:

The work light features three distinct brightness levels:

- High (1000 Lumens): Provides maximum illumination for large areas or detailed tasks.
- Medium (500 Lumens): Offers balanced brightness for general use.
- Low (200 Lumens): Ideal for extended use or when less intense light is required.

Simply press the power button repeatedly to cycle through High, Medium, Low, and Off settings.

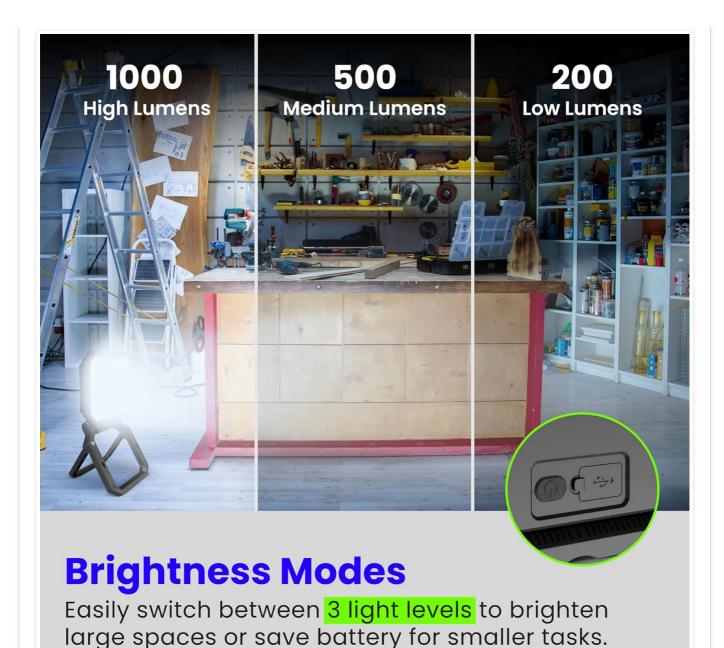

•

Figure 5: Visual comparison of brightness modes.

3. Rotating the Head:

The light panel can rotate 360 degrees independently of the base. Gently rotate the light head to direct the beam precisely where needed.

MAINTENANCE

To ensure optimal performance and longevity of your Feit Electric Portable LED Work Light, follow these maintenance quidelines:

- Cleaning: Wipe the light with a soft, damp cloth. Do not use abrasive cleaners or solvents, as they may damage the surface or internal components.
- Storage: When not in use for extended periods, store the light in a cool, dry place. Ensure the battery is partially charged (around 50%) before storage to prolong battery life. Recharge every 3-6 months if stored for long durations.
- Battery Care: Avoid fully depleting the battery frequently. Recharge the light when the battery indicator shows low power.
- Weatherproof Design: While designed to be weatherproof, avoid submerging the unit in water. Ensure the charging

TROUBLESHOOTING

If you encounter issues with your work light, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Light does not turn on.	Battery is fully discharged.	Charge the light using the provided USB Type-C cable.
Light output is dim.	Battery is low or light is on a lower brightness setting.	Recharge the battery. Press the power button to cycle to a higher brightness mode.
Light does not charge.	Charging cable or adapter is faulty; charging port is obstructed.	Try a different USB Type-C cable and power adapter. Ensure the charging port is clean and free of debris.
Light flickers.	Low battery or internal issue.	Recharge the battery. If flickering persists, contact customer support.

SPECIFICATIONS

Attribute	Detail
Brand	Feit Electric
Model Number	WORK1000/FOLD/BAT
Light Source Type	Light Emitting Diode (LED)
Brightness (Lumens)	1000 (High), 500 (Medium), 200 (Low)
Color Temperature	6500 Kelvin (Cool White)
Power Source	Battery Powered (Rechargeable Lithium-Ion 3000mAh)
Charging Port	USB Type-C
Estimated Lifetime	25,000 Hours
Material	Plastic (with metal housing)
Product Dimensions	1.7"L x 4.3"W x 5.2"H
Item Weight	11.2 ounces

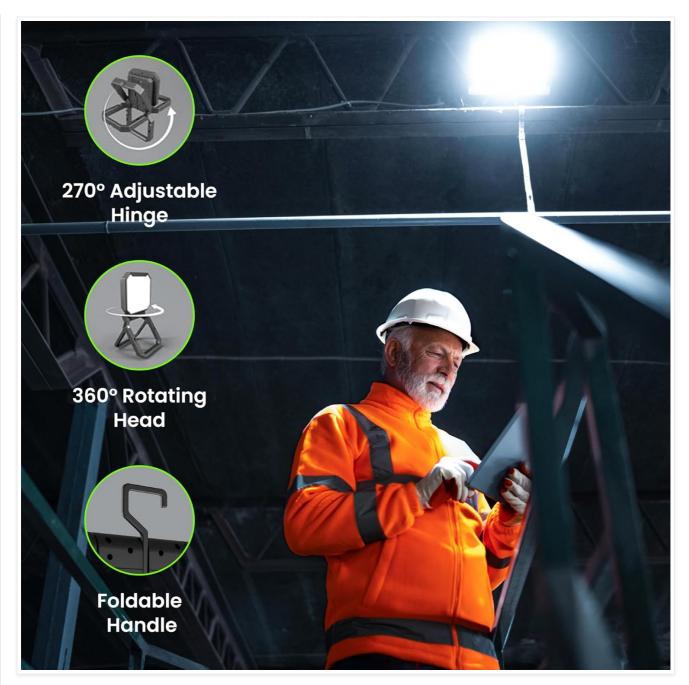



Figure 6: Detailed bulb benefits and features.

WARRANTY AND SUPPORT


This Feit Electric Portable LED Work Light comes with a **1-year manufacturer warranty**. For warranty claims, technical support, or additional product information, please visit the official Feit Electric website or contact their customer service department.

You can also find more information and support by visiting the Feit Electric Store on Amazon.

© 2024 Feit Electric. All rights reserved.

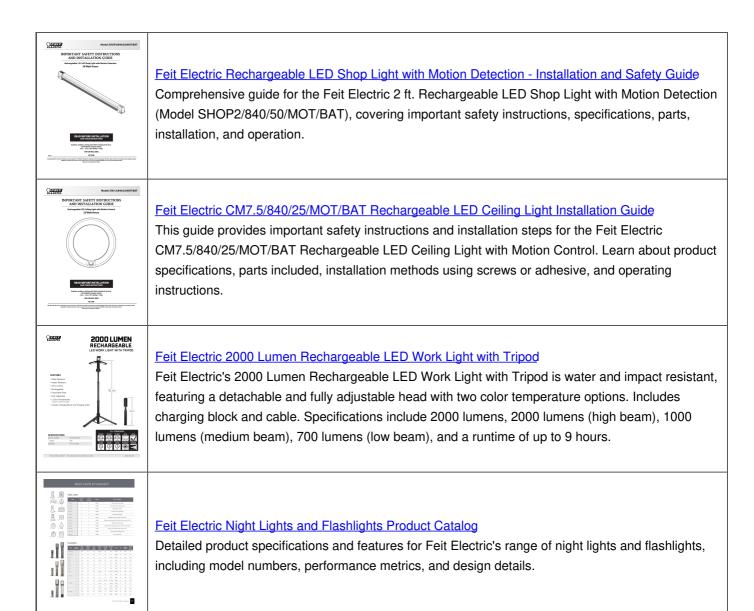

Documents - Feit Electric - WORK1000/FOLD/BAT



[pdf] Specifications Warranty

Specsheet Template Specification Sheet 1000 Lumens Rechargeable Portable LED Work Light WORK1000 FOLD BAT SpecSheet appshopfy feit storage files s $\mid\mid\mid$

1000 Lumens Rechargeable Portable LED Work Light Features Durable weatherproof construction suitable for outdoor use 270 rotating head can be positioned exactly where needed Choose from Low, Medium, and High brightness levels Ideal usage: Work Lights Specifications Item Number WORK1000/FOLD/BAT Le...

lang:en score:40 filesize: 156.38 K page count: 1 document date: 2024-06-19



[pdf] Specifications Decleration of Conformity Warranty

Specsheet Template 1000 Lumens Rechargeable Portable LED Work Light Unilog Durable weatherproof construction suitable for outdoor use 270° rotating head can be positioned exactly where needed Choose from Low Medium Feit Electric 103794230 Specification Sheet assets unilogcorp 187 ITEM DOC ||| 1000 Lumens Rechargeable Portable LED Work Light Features Durable weatherproof construction suitable for outdoor use 270 rotating head can be positioned exactly where needed Choose from Low, Medium, and High brightness levels Ideal usage: Work Lights Specifications Item Number WORK1000/FOLD/BAT Len...

lang:en score:29 filesize: 156.33 K page_count: 1 document date: 2024-11-27