



[Manuals.plus](#) /

› [ELIDAIP](#) /

› ELIDAIP T-M9 Super Mini Walkie Talkies with Earpieces Instruction Manual

ELIDAIP T-M9

ELIDAIP T-M9 Super Mini Walkie Talkies with Earpieces Instruction Manual

Model: T-M9 | Brand: ELIDAIP

1. INTRODUCTION

This manual provides essential information for the safe and efficient operation of your ELIDAIP T-M9 Super Mini Walkie Talkies. Please read it thoroughly before using the device to ensure proper functionality and to prevent damage.



Image 1: ELIDAIP T-M9 Super Mini Walkie Talkies with earpieces and charging cables.

2. WHAT'S IN THE BOX

- Mini Walkie Talkies (x2)
- G-shape designed ear hook (x2)
- USB Cable (x2)
- Power Adaptor (x2)
- English Manual (x1)

3. PRODUCT OVERVIEW

The ELIDAIP T-M9 is a compact and lightweight two-way radio designed for clear communication in various environments. It features an ergonomic earpiece, smart LED display, and convenient Type-C charging.

MINI WALKIE-TALKIE FUNCTION KEY DIAGRAM

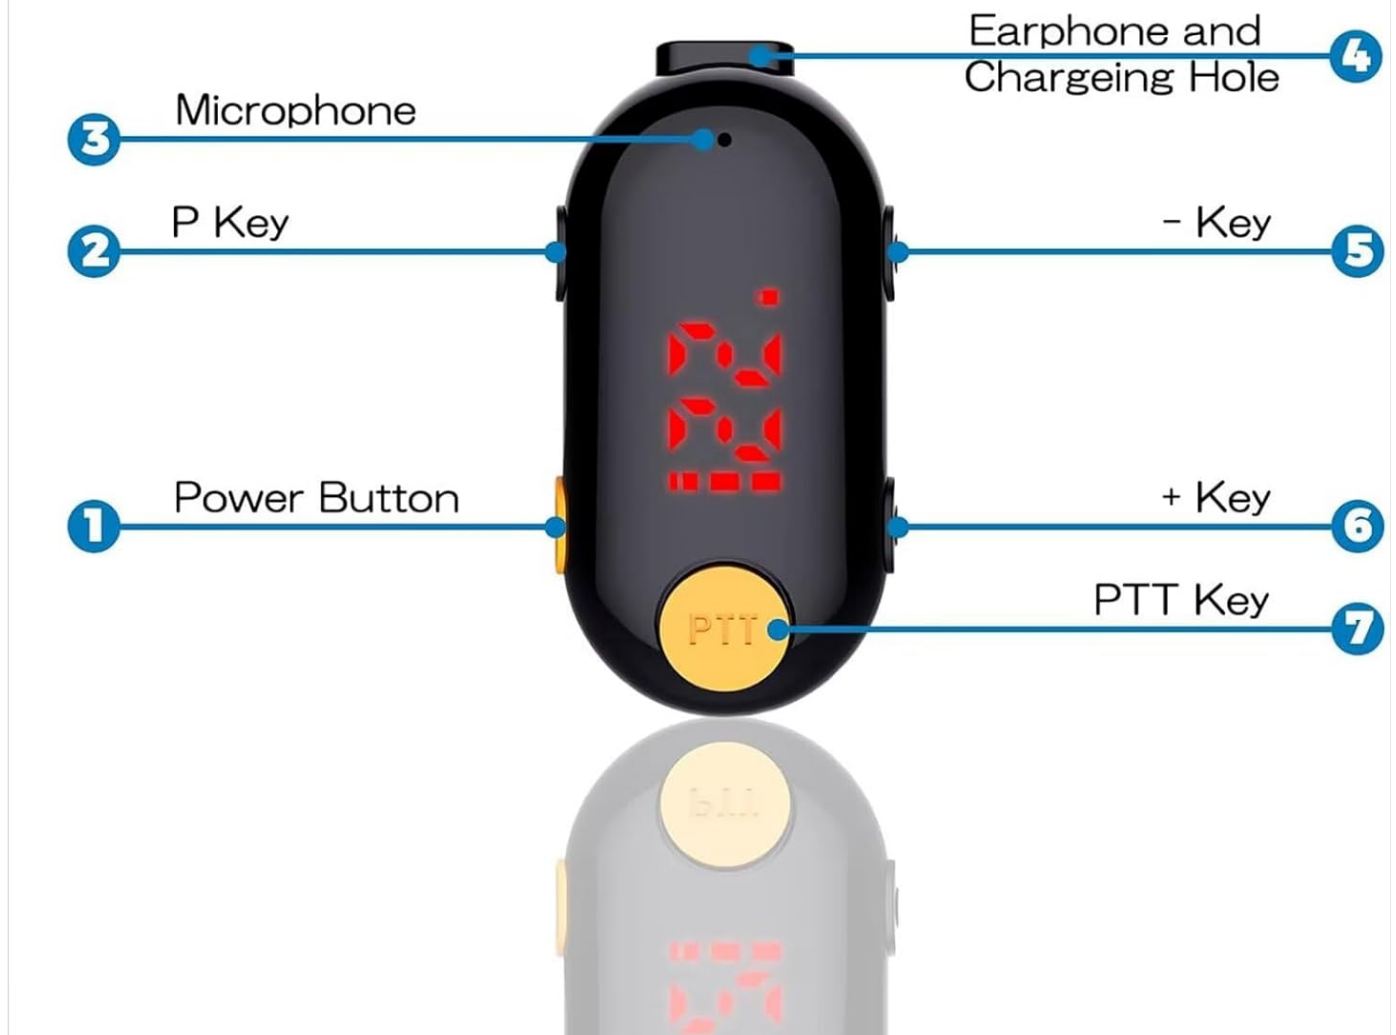


Image 2: Mini Walkie-Talkie Function Key Diagram.

- **Power Button:** Turns the device on/off.
- **P Key:** Used for locking/unlocking the device.
- **Microphone:** For voice input.
- **Earphone and Charging Hole:** Multi-purpose port for earpiece and charging.
- **- Key:** Decreases channel or volume.
- **+ Key:** Increases channel or volume.
- **PTT Key (Push-to-Talk):** Press and hold to transmit voice.

Earpiece Design

The included G-shaped ear hook earpieces are designed for comfort during extended wear. They feature a 360-degree

rotating head, allowing use in either the left or right ear.

360° Degree Rotating Headset

The earphone design can rotate 360 degrees, which is convenient for left and right ears.



Image 3: 360-Degree Rotating Headset Details.

Smart LED Display

The mini two-way radio features an LED display that clearly shows channel/volume settings and charging status. A smart security lock prevents accidental key presses.



Image 4: Key Features of the T-M9 Walkie Talkie.

4. SETUP

4.1 Charging the Device

Before first use, fully charge your walkie talkie. Use the provided USB-C cable and power adapter. The LED display will indicate charging status.

Video 1: Demonstrates the charging status display on the T-M9 walkie talkie.

4.2 Attaching the Earpiece

Connect the G-shaped ear hook earpiece to the designated port on the walkie talkie. Ensure it is securely fastened.

Video 2: Shows how to wear the T-M9 Super Mini Walkie Talkie headset.

5. OPERATING INSTRUCTIONS

5.1 Power On/Off

To power on the device, press and hold the **Power Button** until the LED display illuminates. To power off, press and hold the **Power Button** again.

5.2 Channel Selection

The T-M9 supports 25 channels. To change the channel:

1. Press the **- Key** or **+ Key** to enter channel adjustment mode. The display will show 'CH' followed by the current channel number.
2. Use the **- Key** or **+ Key** to select your desired channel.
3. Press the **PTT Key** to save the setting and return to standby mode.

Video 3: Demonstrates automatic frequency calibration and channel selection.

5.3 Volume Adjustment

The device offers 8 volume levels. To adjust the volume:

1. First, ensure you are not in channel adjustment mode. If you are, press the **PTT Key** to save the channel setting.
2. Long press the **- Key** or **+ Key** to enter volume adjustment mode. The display will show 'VL' followed by the current volume level.
3. Use the **- Key** or **+ Key** to select your desired volume level.
4. Press the **PTT Key** to save the setting and return to standby mode.

5.4 Push-to-Talk (PTT)

To transmit your voice, press and hold the **PTT Key**. Speak clearly into the microphone. Release the **PTT Key** to stop transmitting and listen for replies.

5.5 Lock/Unlock Function

To prevent accidental changes to settings, you can lock the device:

1. Press the **P Key** once to lock the device. A lock icon will appear on the LED display.
2. Press the **P Key** again to unlock the device. The lock icon will disappear.

6. USAGE SCENARIOS

The ELIDAIP T-M9 walkie talkies are versatile and suitable for a wide range of applications:

- **Business:** Restaurants, hotels, shopping malls, supermarkets, hospitals, security, construction sites.
- **Outdoor Activities:** Camping, hiking, cycling, family travel, sports events.
- **Personal Use:** Coordinating with family or friends in large venues or during events.

Applicable in various environments/scenarios

This headset style mini walkie-talkie can be used in hotels, restaurants, kitchens, shopping malls, gymnasiums, hospitals, security, outdoor activities, bicycles, camping, family travel, etc.



Image 5: Applicable in Various Environments/Scenarios.

7. COMMUNICATION RANGE

The transmission range of the T-M9 walkie talkies depends on various factors such as terrain, weather conditions, and obstructions. In an open, flat area with no high obstacles, the talking range is approximately 2 miles.



Image 6: Communication Range and Battery Life.

8. MAINTENANCE

- Keep the device dry. Avoid exposure to rain, moisture, or liquids.
- Clean the device with a soft, dry cloth. Do not use harsh chemicals or cleaning solvents.
- Store the walkie talkie in a cool, dry place when not in use.
- Ensure the charging port cover is properly sealed to maintain water resistance.

9. TROUBLESHOOTING

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
No power	Battery is depleted.	Charge the walkie talkie using the provided USB-C cable and adapter.
Cannot communicate	Different channels or privacy codes.	Ensure both walkie talkies are set to the same channel and privacy code (if applicable).
Poor audio quality	Out of range, obstructions, or low battery.	Move closer to the other device, ensure clear line of sight, or recharge battery.
Keys unresponsive	Keypad is locked.	Press the P Key to unlock the device.

10. SPECIFICATIONS

- **Model Number:** T-M9
- **Brand:** ELIDAIP
- **Item Weight:** 0.6 ounces
- **Product Dimensions:** 2.08 x 0.59 x 0.84 inches
- **Batteries:** 2 Lithium Polymer batteries (included)
- **Display Type:** LED full-array
- **Color:** Black
- **Number of Channels:** 25
- **Frequency Range:** 462.55-467.71MHz
- **Talking Range Maximum:** 2 Miles (in open, flat areas)
- **Voltage:** 3.7 Volts (DC)
- **Water Resistance Level:** Water Resistant
- **Special Features:** Mini, Lightweight, Rechargeable, Adjustable, Noise Reduction

11. WARRANTY & SUPPORT

This product comes with a manufacturer's warranty. For specific warranty details or technical support, please refer to the contact information provided in your product packaging or visit the official ELIDAIP website.

For additional information or to explore other ELIDAIP products, visit the [ELIDAIP Store on Amazon](#).