

HOTWAV R9 Pro

HOTWAV R9 Pro Rugged Tablet User Manual

Model: R9 Pro

1. INTRODUCTION

This manual provides essential information for the safe and efficient use of your HOTWAV R9 Pro Rugged Tablet. Please read this manual thoroughly before operating the device and retain it for future reference. The HOTWAV R9 Pro is designed for durability and high performance, featuring an 11-inch FHD+ display, Android 14, 20GB RAM, 256GB ROM (expandable to 2TB), a 20080mAh battery, 64MP rear camera, 16MP front camera, 4G connectivity, WLAN 5G, and IP68/IP69K/MIL-STD-810H certifications for ruggedness.

2. PACKAGE CONTENTS

Verify that all items are present in your product box:

- 1x HOTWAV R9 Pro Rugged Tablet
- 1x 20W Charger
- 1x 3A Data Cable (USB Type-C)
- 1x OTG Data Cable
- 1x Color Protective Film
- 1x User Manual

R9 Pro



Image: Illustration of the HOTWAV R9 Pro tablet and its included accessories, along with device dimensions.

3. DEVICE OVERVIEW

The HOTWAV R9 Pro features a robust design with an 11-inch display and integrated components for various functionalities.



Image: Front and back view of the HOTWAV R9 Pro tablet, highlighting its rugged construction.

Key Features:

- **Display:** 11-inch FHD+ (1920x1200) with 60Hz refresh rate.
- **Processor:** Octa-core Unisoc T606 for smooth performance.
- **Memory & Storage:** 20GB RAM (6GB physical + 14GB virtual) and 256GB internal storage, expandable up to 2TB via SD card.
- **Battery:** Massive 20080mAh battery with 20W fast charging support.
- **Cameras:** 64MP main rear camera, 16MP front camera.
- **Durability:** IP68, IP69K, and MIL-STD-810H certified for water, dust, and shock resistance.
- **Connectivity:** Dual SIM 4G, WLAN 5G, Bluetooth 5.0, GPS (GPS+Beidou+GLONASS+Galileo).
- **Additional Features:** Face ID, OTG support, 350-lumen LED flashlight.

4. SETUP

4.1. SIM Card and SD Card Installation

The HOTWAV R9 Pro supports dual SIM cards and an expandable SD card for additional storage.

1. Locate the SIM/SD card tray on the side of the tablet.
2. Use the provided SIM ejector tool to open the tray.
3. Carefully place your Nano-SIM cards and/or microSD card into the designated slots. Ensure correct orientation.
4. Gently push the tray back into the tablet until it is flush with the device body.

Double Carte SIM 4G + WLAN Double Bande

(Remarque : Non compatible avec AT&T)

Équipé de deux emplacements pour cartes, il prend en charge l'insertion de deux cartes SIM et est conçu pour les utilisateurs efficaces. Que ce soit pour le travail ou le divertissement, vous pouvez facilement basculer entre plusieurs réseaux et rester connecté à tout moment, n'importe où.

Bande de Fréquence du

2G: B2/B3/B5/B8
3G WCDMA: B1/B2/B4/B5/B8
4G TDD: B38/B39/B40/B41
FDD: B1/B2/B3/B4/B5/B7/B8/B12/B17/B18/B19/B20/B25/B26/B28A/B28B/B66



Image: Depiction of the tablet's dual SIM card slots and 4G/WLAN capabilities.

4.2. Powering On/Off

- **To Power On:** Press and hold the Power button located on the side of the tablet until the HOTWAV logo appears on the screen.
- **To Power Off:** Press and hold the Power button, then select 'Power off' from the options that appear on the screen.
- **To Restart:** Press and hold the Power button, then select 'Restart' from the options.

4.3. Initial Setup Wizard

Upon first power-on, the tablet will guide you through an initial setup process. Follow the on-screen instructions to:

- Select your language.
- Connect to a Wi-Fi network.
- Set up your Google account.
- Configure screen lock (PIN, pattern, password, or Face ID).
- Review and accept terms and conditions.

5. OPERATING INSTRUCTIONS

5.1. Basic Navigation

The HOTWAV R9 Pro runs on Android 14, offering an intuitive user interface.

R9 Pro



Image: The HOTWAV R9 Pro displaying the Android 14 operating system interface.

- **Home Screen:** Swipe left or right to access different home screens.
- **App Drawer:** Swipe up from the bottom of the screen to access all installed applications.
- **Notifications & Quick Settings:** Swipe down from the top of the screen to view notifications and quick settings toggles.
- **Multitasking:** Swipe up and hold from the bottom of the screen to view recent applications.

5.2. Display Features

The 11-inch FHD+ display provides a clear and immersive viewing experience.



Écran Ultra-Large de 11 Pouces de Classe 2K
Vous Méritez Plus Grand

La tablette robuste HOTWAV R9 Pro est dotée d'un superbe écran 2K de 11 pouces. Cet écran vous offre des visuels d'une clarté cristalline, que vous diffusiez vos émissions préférées, jouiez à des jeux ou travailliez. La grande taille et les détails nets font tout ressortir, vous offrant une expérience super immersive, tout en restant agréable à regarder. Profitez désormais de visuels de premier ordre.

 27.9cm (11-inch) Affichage Plein écran	 14.5:9 Format D'image	
 1200*1920 Résolution	 400nits Luminosité maximale	 1500 contraste

Image: The 11-inch 2K display showcasing a gaming scene, emphasizing visual quality.

- **Brightness Adjustment:** Adjust screen brightness from the Quick Settings panel or Display settings.
- **Night Light:** Enable Night Light mode to reduce blue light emission for comfortable viewing in low light.
- **Glove Mode:** The tablet supports touch input even when wearing gloves, useful in outdoor or industrial environments.

5.3. Camera Usage

Capture moments with the 64MP rear camera and 16MP front camera, including a dedicated underwater mode.



Image: A smartphone displaying a snowy landscape, representing the camera's capability.

- **Taking Photos:** Open the Camera app, frame your shot, and tap the shutter button.
- **Switching Cameras:** Tap the camera switch icon to toggle between front and rear cameras.
- **Underwater Mode:** Activate underwater mode from the camera settings for taking photos and videos while submerged. Use physical buttons for control in this mode.

Certifié IP68, IP69K et MIL-STD-810H

Conçu pour les défis en extérieur ! Avec des fonctionnalités étanches, anti-chute et anti-poussière, il peut même être utilisé avec des gants, ce qui le rend facile à utiliser dans divers environnements. Qu'il s'agisse de travail ou de divertissement, le R9 PRO est votre meilleur appareil !

Résistant aux chutes jusqu'à 1,2 m

Étanche jusqu'à 2 m de profondeur pendant au moins 30 min

Étanche à la poussière

Prend En Charge L'utilisation Avec Des Gants

Image: The tablet being used underwater to capture photos, demonstrating its waterproof capabilities.

5.4. Connectivity

Stay connected with 4G cellular, WLAN 5G, and Bluetooth 5.0.

- **Wi-Fi:** Go to Settings > Network & internet > Wi-Fi to connect to available networks. The tablet supports WLAN 5G for faster speeds.
- **4G Cellular:** Insert a 4G compatible SIM card to access mobile data. (Note: Not compatible with AT&T).
- **Bluetooth:** Go to Settings > Connected devices > Bluetooth to pair with Bluetooth accessories like headphones or speakers.



Plus Rapide, Plus Fiable **Wi-Fi 5**

Bénéficiez d'un Internet plus rapide et plus fluide grâce à la prise en charge du Wi-Fi 5 du HOTWAV R9 Pro. Profitez d'une navigation, d'un streaming et de jeux fluides avec une vitesse et une stabilité améliorées, que ce soit à la maison ou en déplacement.



Un Cran au-Dessus **Bluetooth 5.0**

Connectez-vous facilement grâce au Bluetooth 5.0 sur HOTWAV R9 Pro. Profitez d'une vitesse améliorée, d'une plus grande portée et d'une meilleure efficacité de la batterie tout en connectant vos appareils préférés. Que ce soit pour la musique, les appels ou le transfert de données, cette tablette garantit une expérience sans fil fluide et fiable.

Image: Graphics illustrating Wi-Fi 5 and Bluetooth 5.0 symbols, representing the tablet's wireless connectivity options.

5.5. Battery Management

The 20080mAh battery provides extended usage times.



Image: Visual representation of the tablet's long-lasting 20080mAh battery, showing extended usage times for various activities.

- **Charging:** Use the provided 20W charger and USB Type-C cable for optimal charging speed.
- **OTG Functionality:** The tablet supports OTG (On-The-Go), allowing it to act as a power bank to charge other devices using the OTG data cable.

R9 Pro



Image: The tablet connected via OTG cable to charge other electronic devices, demonstrating its power bank capability.

5.6. Security (Face ID)

Unlock your tablet quickly and securely using Face ID.

- **Setup Face ID:** Go to Settings > Security > Face unlock and follow the on-screen instructions to register your face.
- **Usage:** Lift the tablet to your face, and it will automatically unlock.

R9 Pro



Image: A person using Face ID to unlock the tablet while wearing gloves, highlighting convenience and security.

5.7. GPS Navigation

The tablet supports multiple global navigation satellite systems for accurate positioning.

- **Supported Systems:** GPS, Beidou, GLONASS, and Galileo.
- **Usage:** Use pre-installed or downloaded navigation apps for precise location tracking and route guidance.



GPS+BEIDOU+GLONASS+Galileo

HOTWAV R9 PRO est compatible avec GPS+BEIDOU+GLONASS+Galileo. Vous pouvez télécharger des cartes à l'avance et les utiliser dans des endroits sans réseau ni signal. Qu'il s'agisse de navigation, d'enregistrement de piste ou de géolocalisation, il peut vous aider à faire face facilement à divers besoins de voyage, à naviguer avec précision et à bénéficier de performances puissantes et d'une prise en charge efficace des applications.

Image: The tablet displaying a navigation map, indicating its GPS capabilities for precise positioning.

5.8. LED Flashlight

The integrated 350-lumen LED flashlight provides powerful illumination for various situations.

- **Activation:** Access the flashlight toggle from the Quick Settings panel or a dedicated app.
- **Usage:** Ideal for outdoor activities, inspections, or in low-light environments.



Image: A collage showing the tablet's LED flashlight illuminating outdoor scenes, such as camping and night cycling.

6. MAINTENANCE

6.1. Cleaning

- Use a soft, lint-free cloth to clean the screen and body of the tablet.
- For stubborn marks, slightly dampen the cloth with water or a screen cleaner.
- Avoid using harsh chemicals, abrasive materials, or aerosol sprays.

6.2. Water and Dust Resistance

The HOTWAV R9 Pro is IP68, IP69K, and MIL-STD-810H certified, meaning it is resistant to water, dust, and drops. However, proper care is still necessary:

- Ensure all port covers (USB-C, SIM tray) are securely closed before exposing the tablet to water or dust.

- Do not intentionally submerge the tablet beyond its rated depth (1.5 meters) or duration (30 minutes).
- If the tablet gets wet, dry it thoroughly with a clean cloth before charging or opening any ports.

Soyez Opérationnel Pendant 120 Jours et Plus Avec une Seule Charge

Batterie massive de 20080 mAh

Pour les aventures en plein air, vous devez absolument jeter un oeil à la HOTWAV R9 Pro. Cette tablette change la donne avec sa batterie massive de 20 080 mAh, vous offrant une autonomie en veille impressionnante de plus de 120 jours ! Parfait pour les randonnées ou les voyages en camping où vous n'aurez peut-être pas accès à l'électricité pendant des jours. Vous pouvez capturer des souvenirs, diffuser de la musique ou rester connecté sans vous soucier de manquer de batterie. C'est un compagnon fiable pour votre prochaine aventure !



20080mAh
Grandes Piles



20W
Prise en Charge de la Charge Rapide



100H
Heures d'appel



1000H
Musique

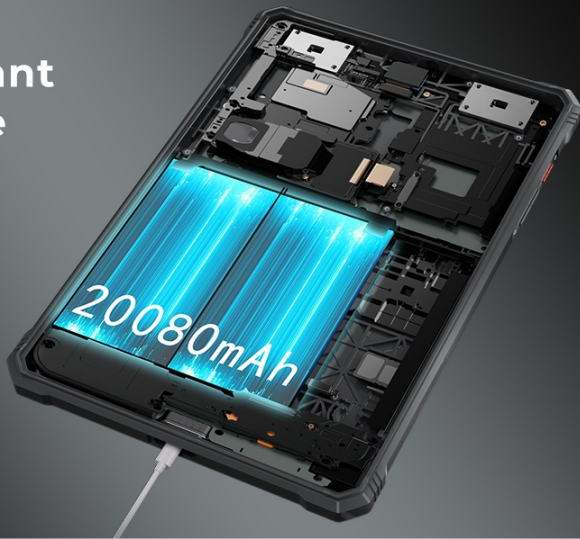


Image: The rugged tablet shown in various challenging environments, emphasizing its durability against drops, water, and dust.

6.3. Software Updates

Regularly check for and install software updates to ensure optimal performance, security, and access to new features. Go to Settings > System > System update.

7. TROUBLESHOOTING

If you encounter issues with your HOTWAV R9 Pro, refer to the following common solutions:

Problem	Solution
Tablet does not power on	Ensure the battery is charged. Connect the charger and wait a few minutes before attempting to power on again. If unresponsive, perform a forced restart by holding the Power button for 10-15 seconds.
Screen is unresponsive	Restart the tablet. If the issue persists, ensure the screen is clean and free of debris.
Cannot connect to Wi-Fi	Check if Wi-Fi is enabled in Quick Settings or Network settings. Restart your router and the tablet. Ensure you are entering the correct password.
Poor battery life	Adjust screen brightness, close unused apps, disable unnecessary connectivity features (Bluetooth, GPS) when not in use. Check battery usage in Settings to identify power-hungry apps.
Apps are crashing or freezing	Clear the cache and data for the problematic app (Settings > Apps > [App Name] > Storage). Update the app or reinstall it. Ensure the tablet's software is up to date.
Face ID not working	Ensure your face is well-lit and unobstructed. Re-register your face in the security settings.

For further assistance, please contact HOTWAV customer support.

8. SPECIFICATIONS

Feature	Detail
Model Name	R9 Pro
Operating System	Android 14
Processor	Unisoc T606 Octa Core, 1.6 GHz
RAM	20 GB (6 GB physical + 14 GB virtual)
Internal Storage	256 GB
Expandable Storage	Up to 2 TB (microSD)
Display Size	11 Inches
Display Resolution	1920x1200 FHD+
Refresh Rate	60 Hz
Max Brightness	400 nits
Rear Camera	64 MP
Front Camera	16 MP
Battery Capacity	20080 mAh
Charging	20W Fast Charging
Connectivity	4G LTE, WLAN 5G (802.11g), Bluetooth 5.0, USB Type-C
Navigation	GPS, Beidou, GLONASS, Galileo
Security	Face Recognition
Durability	IP68, IP69K, MIL-STD-810H
Dimensions (L x W x T)	25.1 x 16.8 x 1.5 cm
Weight	1066 Grams

9. WARRANTY AND SUPPORT

Your HOTWAV R9 Pro tablet comes with a 2-year warranty, ensuring peace of mind regarding manufacturing defects and performance issues.



Service
Client
24h/24



Retour
Sans Motif
Sous 30 Jours



Garantie
de 2 Ans

Image: HOTWAV shield logo with icons for 24/7 customer service, 30-day returns, and 2-year warranty.

9.1. Warranty Information

- **Duration:** 2 years from the date of purchase.
- **Coverage:** Covers defects in materials and workmanship under normal use.
- **Exclusions:** Does not cover damage caused by misuse, accidents, unauthorized repairs, or normal wear and tear beyond the specified ruggedness ratings.

9.2. Customer Support

For technical assistance, warranty claims, or any other inquiries, please contact HOTWAV customer support through the official channels provided at the time of purchase or on the HOTWAV official website.

Online Resources: Visit the official HOTWAV website for FAQs, software downloads, and additional support resources.