

Manuals.plus /

› Telbum /

› Telbum 5-in-1 DJ Disco Lights Party Lights VS-49X User Manual

Telbum VS-49X

Telbum 5-in-1 DJ Disco Lights Party Lights

MODEL: VS-49X

Introduction

This manual provides detailed instructions for the safe and effective operation of your Telbum 5-in-1 DJ Disco Lights Party Lights, model VS-49X. This versatile lighting unit combines multiple effects to create dynamic visual experiences for various events.

Safety Information

- Always connect the device to a grounded power outlet.
- Do not expose this equipment to rain or moisture.
- Avoid direct eye exposure to the laser light.
- Ensure proper ventilation to prevent overheating.
- Disconnect power before cleaning or servicing.
- Keep out of reach of children.

What's in the Box

WHAT'S IN THE PACKAGE



LED Party Light*1

Remote Control *1

Two-pin US Power Cord*1

User's Manual *1

The package includes:

- 1 x LED Party Light (VS-49X)
- 1 x Power Cord
- 1 x Remote Control
- 1 x User Manual

Image: The product packaging showing the LED Party Light, power cord, remote, and user manual.

Product Overview



Front Panel Features:

- **RGBW Derby Light:** Projects multi-colored beams.
- **RGB LED Pattern Light:** Creates various dynamic patterns.
- **Green Starry Light (Laser):** Projects green star-like effects.
- **Red & Green Pattern Light (Laser):** Generates red and green laser patterns.
- **White Strobe Light:** Produces flashing white light effects.

Rear Panel Features:

- **LCD Display:** Shows current mode and settings.
- **Menu/Enter Buttons:** For navigating and confirming settings.
- **Up/Down Buttons:** For adjusting values and selecting options.
- **DMX In/Out Ports:** For connecting to DMX controllers.
- **Power In/Out:** For power connection.
- **Heat Sink & Cooling Fan:** For efficient heat dissipation.

- **Bracket Adjustment Knob:** For adjusting the mounting bracket angle.

Image: A detailed diagram illustrating the front and rear components of the Telbum 5-in-1 DJ Disco Light, including the various light sources, control panel, and connection ports.

Setup

1. **Unpacking:** Carefully remove the light unit and all accessories from the packaging.
2. **Attach Mounting Bracket:** Secure the included bracket to the sides of the light unit using the provided screws and adjustment knobs. This bracket allows for versatile positioning (floor, wall, ceiling).
3. **Positioning:** Place the light on a stable surface or mount it securely to a wall or ceiling using appropriate hardware (not included). Adjust the bracket to achieve the desired projection angle.
4. **Power Connection:** Connect the power cord to the 'Power In' port on the rear of the unit, then plug it into a standard AC100V-240V, 50/60Hz power outlet.


Operating Modes

The Telbum VS-49X offers multiple control options for diverse lighting needs:

- **Remote Control:** Easy wireless operation for various effects.
- **DMX Control:** For professional lighting setups using a DMX512 controller.
- **Sound-Activated Mode:** Lights react to music and sound.
- **Auto-Mode:** Pre-programmed light shows for continuous operation.
- **Master-Slave Mode:** Synchronize multiple units.

Remote Control Functions

ON	Power on
OFF	Power off
DMX	DMX pattern
AUTO	Auto function switch
speed+	Motor speed increased
speed-	Motor speed decreases
voice	Enter sound mode
mic+	Voice-control sensitivity increased
mic-	Voice-control sensitivity decreases
1	A 1 Derby red & yellow LED auto play
2	A2 Derby green & purple LED auto play
3	A3 Derby blue & white LED auto play
4	A4 LED pattern light auto play
5	A5 Red & green laser auto play
6	A6 Stary green laser auto play
7	A7 White strobe auto play
8	A8 All effect auto play
9	S 1 Sound-activated mode 1
0	S 2 Sound-activated mode 2
*	No function
#	No function

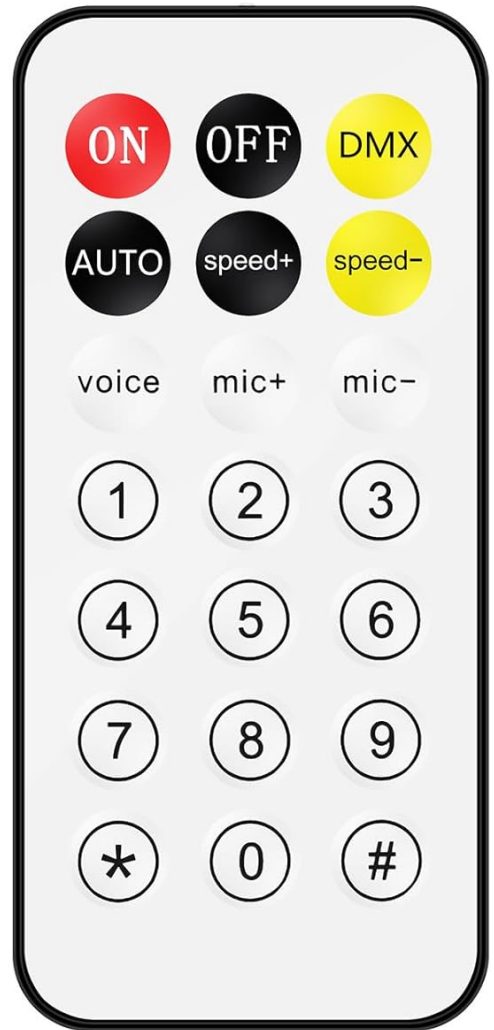

Remote Control Key Functions

Button	Description
ON	Power on
OFF	Power off
DMX	DMX pattern
AUTO	Auto function switch
speed+	Motor speed increased
speed-	Motor speed decreased
voice	Enter sound mode
mic+	Voice-control sensitivity increased
mic-	Voice-control sensitivity decreased
1-9, 0	Select specific auto-play or sound-activated modes (refer to user manual for details)

Image: The remote control for the Telbum 5-in-1 DJ Disco Light, showing all buttons and their corresponding functions.

DMX Control

For professional users, the DMX512 system allows precise control over each light effect. Connect a DMX controller to the 'DMX In' port. Multiple lights can be synchronized by connecting them in series using DMX cables (Master-Slave mode).

Your browser does not support the video tag.

Video: A demonstration of the Telbum 5-in-1 Disco Party Lights, showcasing various light effects and control options, including DMX control.

Sound-Activated Mode

In this mode, the lights respond to the rhythm and volume of nearby music, creating a dynamic light show synchronized with the audio. Adjust sensitivity using the remote control's 'mic+' and 'mic-' buttons.

Auto-Mode

The unit cycles through its pre-programmed light shows automatically. This mode is ideal for continuous, hassle-free operation without manual intervention.

Light Effects

The Telbum VS-49X integrates five distinct lighting effects:

- **RGBW Derby Light:** Produces wide, multi-colored beams that sweep across the area.
- **RGB LED Pattern Light:** Generates various colorful patterns that can rotate and change.
- **Green Starry Light:** Projects numerous small green laser dots, creating a starry sky effect.
- **Red & Green Pattern Light:** Creates intricate red and green laser patterns.

- **White Strobe Light:** Provides a bright, flashing white light effect.



Image: Various colorful light effects, including patterns and beams, projected onto a surface.



Image: Dynamic red and green laser patterns and starry effects projected onto a surface.

Specifications



**PRODUCT
PARAMETERS**

Derby Effect: 6x3W RGBW LED

Pattern: 3x3W LED

Strobe: 1x10W white LED

Laser Red: 1x100mW

Laser Green: 2x50mW

LED Power Consumption: 40W

Voltage: AC100V-240V, 50/60Hz

Strobe Speed: 20 times/ second

Dimming: 0~100% super smooth dimming

Operation: Auto/ DMX512/ Sound activated/ Master-slave

Technical Specifications

Feature	Detail
Model Number	VS-49X
Derby Effect	6 x 3W RGBW LED
Pattern Effect	3 x 3W RGB LED
Strobe Light	1 x 10W White LED
Laser Red	1 x 100mW
Laser Green	2 x 50mW
LED Power Consumption	40W
Voltage	AC100V-240V, 50/60Hz
Strobe Speed	20 times / second
Dimming	0-100% Super Smooth Dimming
Operation Modes	Auto, DMX512, Sound Activated, Master-Slave
Product Dimensions	15"L x 6"W x 6"H
Item Weight	2.2 pounds
Material	Plastic

Image: A graphic displaying the physical dimensions of the light unit and a table listing its key technical specifications.

Maintenance

- **Cleaning:** Regularly clean the lenses and housing with a soft, dry cloth to maintain optimal light output and prevent dust buildup. Do not use abrasive cleaners or solvents.
- **Storage:** When not in use, store the light in a cool, dry place away from direct sunlight and extreme temperatures.
- **Inspection:** Periodically check the power cord and connections for any signs of damage. If any damage is found, discontinue use and contact support.

Troubleshooting

Problem	Possible Solution
Light does not turn on.	Check power connection. Ensure the power cord is securely plugged into both the unit and the outlet. Verify the outlet is functional.
Remote control not working.	Ensure there are no obstructions between the remote and the light's IR receiver. Replace the remote control battery if necessary. Try removing and reinserting the battery.
Lights are dim or flickering.	Check power supply for stability. Ensure the lenses are clean and free of dust.
Sound-activated mode not responding.	Increase the microphone sensitivity using the remote control. Ensure there is sufficient sound volume near the unit.

Warranty and Support

For warranty information and customer support, please refer to the contact details provided with your purchase or visit the official Telbum website. Keep your proof of purchase for any warranty claims.