

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [LOFREE](#) /

› [LOFREE Flow Lite 100 Low Profile Mechanical Keyboard User Manual](#)

LOFREE OE922

LOFREE Flow Lite 100 Low Profile Mechanical Keyboard User Manual

Model: OE922

INTRODUCTION

The LOFREE Flow Lite 100 is a versatile low-profile mechanical keyboard designed for comfort and efficiency across multiple operating systems. It features triple-mode connectivity (2.4GHz wireless, Bluetooth, and wired USB-C), Specter Linear Switches, PBT double-shot keycaps, and a gasket-mounted design for a soft typing experience. This manual provides detailed instructions for setup, operation, maintenance, and troubleshooting.



Image: LOFREE Flow Lite 100 Low Profile Mechanical Keyboard overview.

PACKAGE CONTENTS

Verify that all items are present in your LOFREE Flow Lite 100 package:

- LOFREE Flow Lite 100 Mechanical Keyboard
- USB-C Cable
- User Manual

- Warranty Card



Image: The LOFREET Flow Lite 100 keyboard shown with its included USB-C cable.

SETUP

Power On/Off and Mode Selection

Locate the power switch on the top edge of the keyboard. This switch allows you to select between wired, Bluetooth, and 2.4G wireless modes.

- **Wired Mode:** Slide the switch to the middle position (indicated by a cable icon). Connect the keyboard to your device using the provided USB-C cable.
- **Wireless Mode (Bluetooth/2.4G):** Slide the switch to the side position (indicated by Bluetooth/2.4G icons).



Image: The LOFREET Flow Lite 100 keyboard highlighting its three connection modes: Bluetooth, USB-C, and 2.4GHz Wi-Fi.

2.4GHz Wireless Connection

1. Ensure the keyboard is in wireless mode.
2. Retrieve the 2.4G USB receiver from its storage slot on the back of the keyboard.
3. Plug the 2.4G receiver into an available USB port on your computer.
4. Press **Fn + 4** on the keyboard. The Caps Lock indicator light will turn blue when connected.

Bluetooth Connection

1. Ensure the keyboard is in wireless mode.

2. Hold **Fn** and press **1**, **2**, or **3** to select a Bluetooth channel. The Caps Lock indicator light will blink slowly in blue.
3. On your device, search for Bluetooth devices and select 'LOFREE Flow Lite' to pair. The Caps Lock indicator light will remain solid blue once connected.

Bluetooth Reset

To clear Bluetooth records and pair with a new device, hold **Fn** + **\|** key.

System Switch

The keyboard supports multiple operating systems. Switch between them by holding **Fn** and pressing the corresponding key:

- **Fn + N**: Windows / Android
- **Fn + M**: Mac / iOS

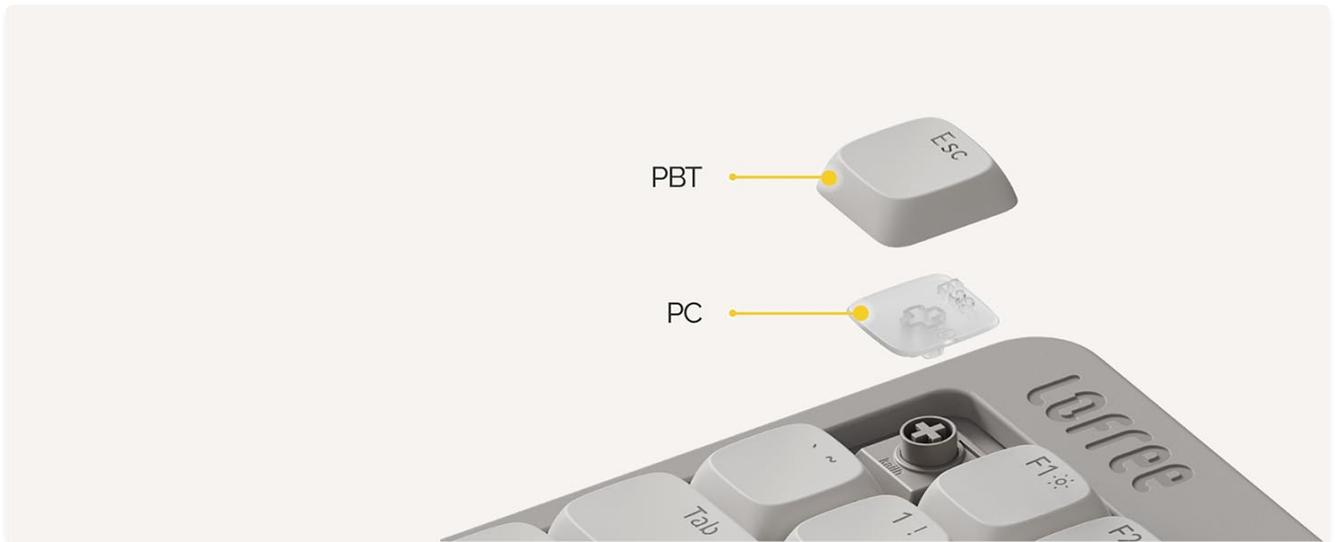


Image: The LOFREE Flow Lite 100 keyboard is compatible with Mac, Windows, iOS, and Android operating systems.

Video: How to connect the Flow Lite keyboard?

Your browser does not support the video tag. This video demonstrates the steps to connect the LOFREE Flow Lite keyboard using its various modes.

Video: This official LOFREE video provides a visual guide on how to connect the Flow Lite keyboard using wired, 2.4G, and Bluetooth connections.

OPERATING INSTRUCTIONS

Indicator Lights

The keyboard features several indicator lights:

- **Battery Status Bar**: A small light bar indicates battery level. White solid means fully charged, breathing light indicates charging, and red blinking signifies low battery.
- **Caps Lock Indicator**: A small round light next to the Caps Lock key indicates its status.
- **Num Lock Indicator**: A small round light next to the Num Lock key indicates its status.

Volume Control

The keyboard includes an aluminum volume wheel for easy audio control:

- **Adjust Volume:** Scroll the wheel up or down to increase or decrease the volume.
- **Mute/Unmute:** Press the volume wheel to toggle mute on or off.

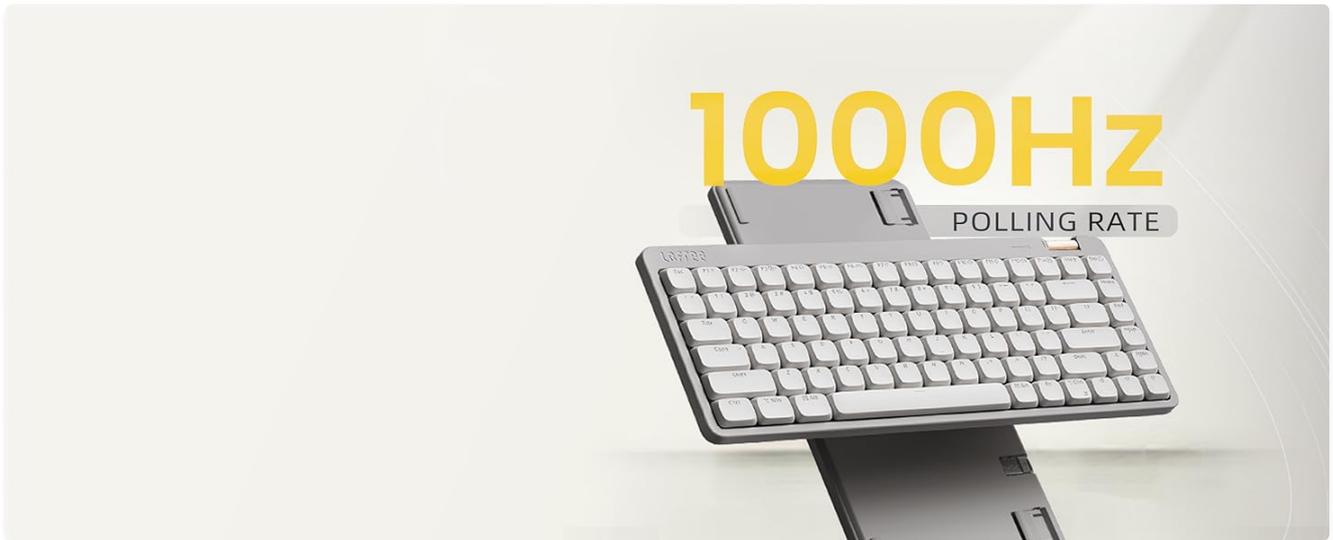


Image: Close-up of the LOFREEN Flow Lite 100 keyboard's volume wheel, used for adjusting audio levels.

Adjustable Kickstand

The keyboard features a built-in adjustable kickstand, allowing you to choose between two typing angles (3° and 6°) for ergonomic comfort.

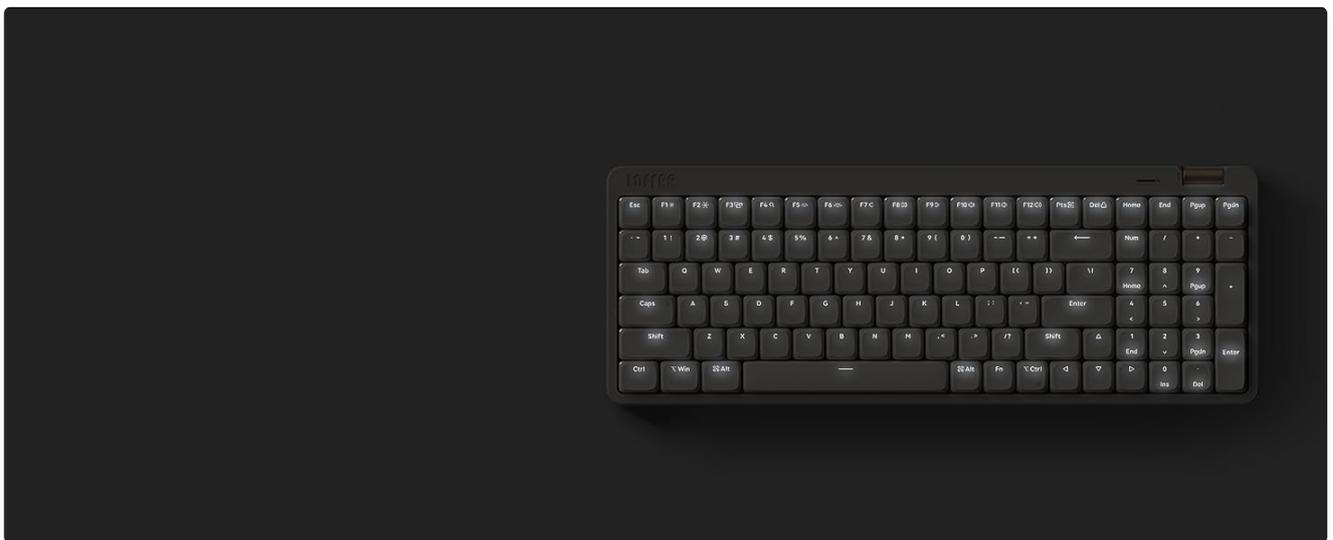


Image: The LOFREEN Flow Lite 100 keyboard demonstrating its two available typing angles (3° and 6°) for ergonomic use.

Lofree Configurator (Key Mapper)

Customize key functions and lighting effects using the Lofree Key Mapper software. This configurator is available for Windows and Mac OS.



Image: The Lofree Key Mapper software interface, used for customizing keyboard settings and key assignments.

Video: The Overview of LOFREE FLOW LITE Mechanical Keyboard

Your browser does not support the video tag. This video provides a comprehensive overview of the LOFREE FLOW LITE Mechanical Keyboard's features and design.

Video: This official LOFREE video offers a detailed overview of the Flow Lite mechanical keyboard, showcasing its design and functionalities.

MAINTENANCE

Battery and Charging

The Flow Lite 100 features a built-in 3000mAh lithium battery, providing up to 100 hours of working time (with all lights off) on a single charge. It charges to 100% in approximately 3 hours via USB-C.



Image: Visual representation of the LOFREE Flow Lite 100 keyboard's battery life, indicating up to 80 hours of use.

Hot-Swappable Switches

The keyboard is hot-swappable, allowing you to easily change switches without soldering. This enables customization of your typing experience.

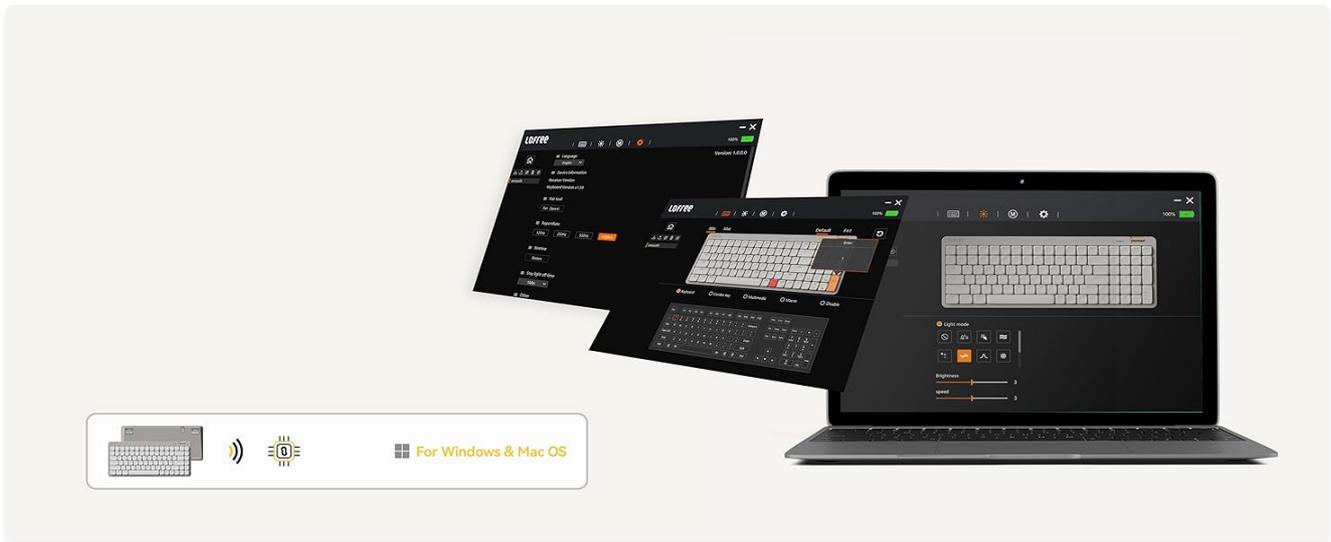


Image: Diagram illustrating the components and specifications of the Specter Full POM Linear Switches used in the keyboard.

Keycap Care

The PBT double-shot keycaps are durable and non-slip. To clean, gently wipe with a soft, damp cloth. Avoid harsh chemicals.



Image: Exploded view of a PBT and PC double-shot keycap, illustrating its construction for shine-through backlighting.

TROUBLESHOOTING

- **Connectivity Issues:** Ensure the keyboard is in the correct mode (wired, 2.4G, or Bluetooth) and properly paired. Try resetting Bluetooth connections if issues persist.
- **Keys Not Responding:** Check if the keyboard is charged. If using wireless, ensure the receiver is securely plugged in or Bluetooth is properly connected.
- **Backlight Problems:** Adjust backlight settings using the Lofree Key Mapper software or designated function keys.

SPECIFICATIONS

| Feature | Detail |
|--------------|--------|
| Model Number | OE922 |

| | |
|-------------------------------------|--|
| Product Dimensions | 14.74 x 5.43 x 0.93 inches |
| Item Weight | 2.12 pounds |
| Manufacturer | LOFREE |
| Batteries | 1 Lithium Polymer batteries required (included) |
| Compatible Devices | Laptop, PC |
| Connectivity Technology | Bluetooth, USB-C, Wi-Fi (2.4GHz) |
| Keyboard Description | Mechanical |
| Special Features | Backlit, Hot-Swappable, Hotkeys and Media Keys, Low-Profile Key, Volume Roller |
| Keyboard Backlighting Color Support | Single Color |

WARRANTY AND SUPPORT

For warranty information and technical support, please refer to the warranty card included in your package or visit the official LOFREE website. LOFREE offers customer support to assist with any product-related inquiries or issues.