

[Manuals.plus](#) /

› [Lincisoonic](#) /

› Lincisoonic Wireless Lavalier Microphone User Manual

Lincisoonic A6

Lincisoonic Wireless Lavalier Microphone User Manual

Model: A6

INTRODUCTION

This manual provides comprehensive instructions for the setup, operation, maintenance, and troubleshooting of your Lincisoonic Wireless Lavalier Microphone. Designed for high-quality audio capture, this device offers advanced features such as 2.4GHz wireless connectivity, noise cancellation, and extended battery life, making it suitable for various recording scenarios including streaming, vlogging, and interviews. Please read this manual thoroughly to ensure optimal performance and longevity of your microphone system.

SETUP GUIDE

Package Contents

Before proceeding, please verify that all components are present in your package:

- 2 x Wireless Lavalier Microphones (Transmitters - TX)
- 1 x Audio Receiver (RX) with Lightning Connector
- 1 x Charging Case
- 2 x Mic Windshields (Wind Muffs)
- Other accessories (e.g., charging cable, user manual)



Figure 1: Complete Lincisoonic Wireless Lavalier Microphone System components.

Initial Charging and Battery Calibration

Upon first use, it is recommended to fully charge the charging case and both microphones. The charging case display may require a few charge/discharge cycles to accurately reflect the battery level. This is a normal characteristic for lithium batteries.

- Place both TX units (microphones) into the charging case.
- Connect the charging case to a power source using the provided cable.
- Allow the units to charge until the charging case display indicates 100%.
- For accurate battery readings, charge both TX units at least twice.

Automatic Pairing and Connection

The Lincisoonic Wireless Lavalier Microphone system features a plug-and-play design, eliminating the need for Bluetooth pairing or app installation.


1. Remove the microphone(s) from the charging case. They will automatically power on.
2. Insert the receiver (RX) into your phone's Lightning port.
3. The microphone(s) and receiver will automatically pair within seconds. The LED indicator on the receiver will confirm

connection.

4. If your phone's battery is low during recording, you can connect an external power source to the RX receiver's input port to charge your phone simultaneously.

2.4G Plug & Play

NO Apps, NO Bluetooth, Easy to use

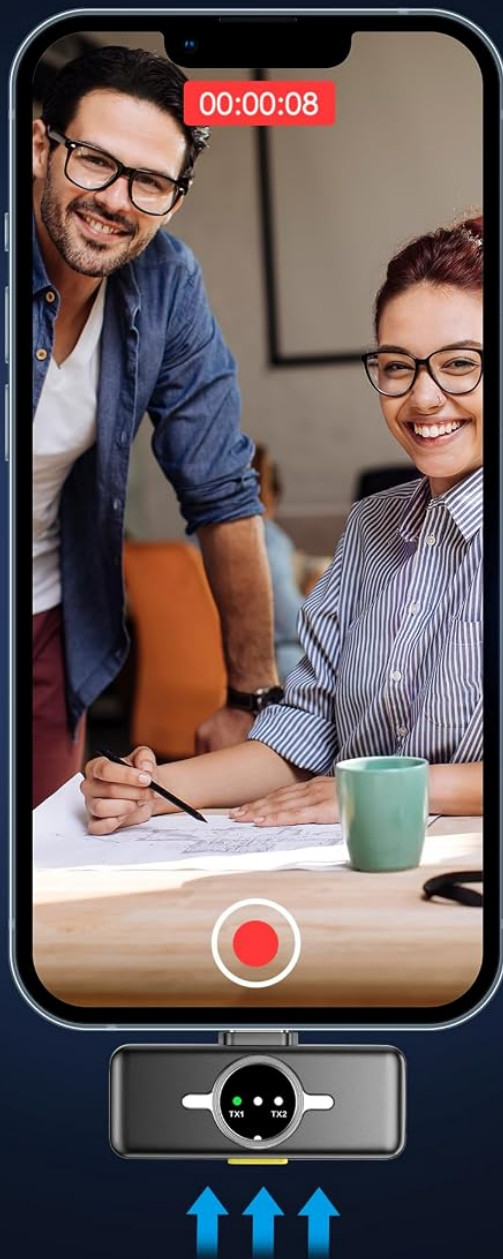

No adapter
Bluetooth



Not need
App



Figure 2: Plug-and-Play connection process for the wireless microphone system.

Compatibility Notice

For optimal performance and a secure connection, avoid using adapters or bulky phone cases that may obstruct the

receiver's connection to your device's port. Ensure your device's port is clean and free of debris.

OPERATING INSTRUCTIONS

Wearing and Attachment

The Lincisoonic Wireless Lavalier Microphone offers both magnetic and clip-on attachment options for versatile placement.

- **Clip-On:** Use the integrated clip to securely attach the microphone to your clothing, such as a collar or lapel.
- **Magnetic:** For discreet placement, utilize the magnetic attachment feature to secure the microphone to clothing without visible clips.

Magnetic & Clip-On Dual Function

Mini, compact and easy to use



Figure 3: Magnetic and Clip-On dual function for microphone attachment.

Multi-Mode Functionality

The microphone features multiple sound modes to adapt to various recording environments. These modes can be switched using the Multi-Function Button (MFB) on the microphone unit. The LED indicator on the receiver will display the current mode.

- **Noise Reduction:** Minimizes background noise for clearer audio, ideal for noisy environments.

- **Original Sound:** Captures audio without any processing, preserving the natural sound.
- **Reverb:** Adds an echo effect to the audio.
- **Mute:** Silences the microphone output.

The system incorporates advanced HD Noise Cancellation 2.0 and DSP (Digital Signal Processing) for enhanced audio quality.

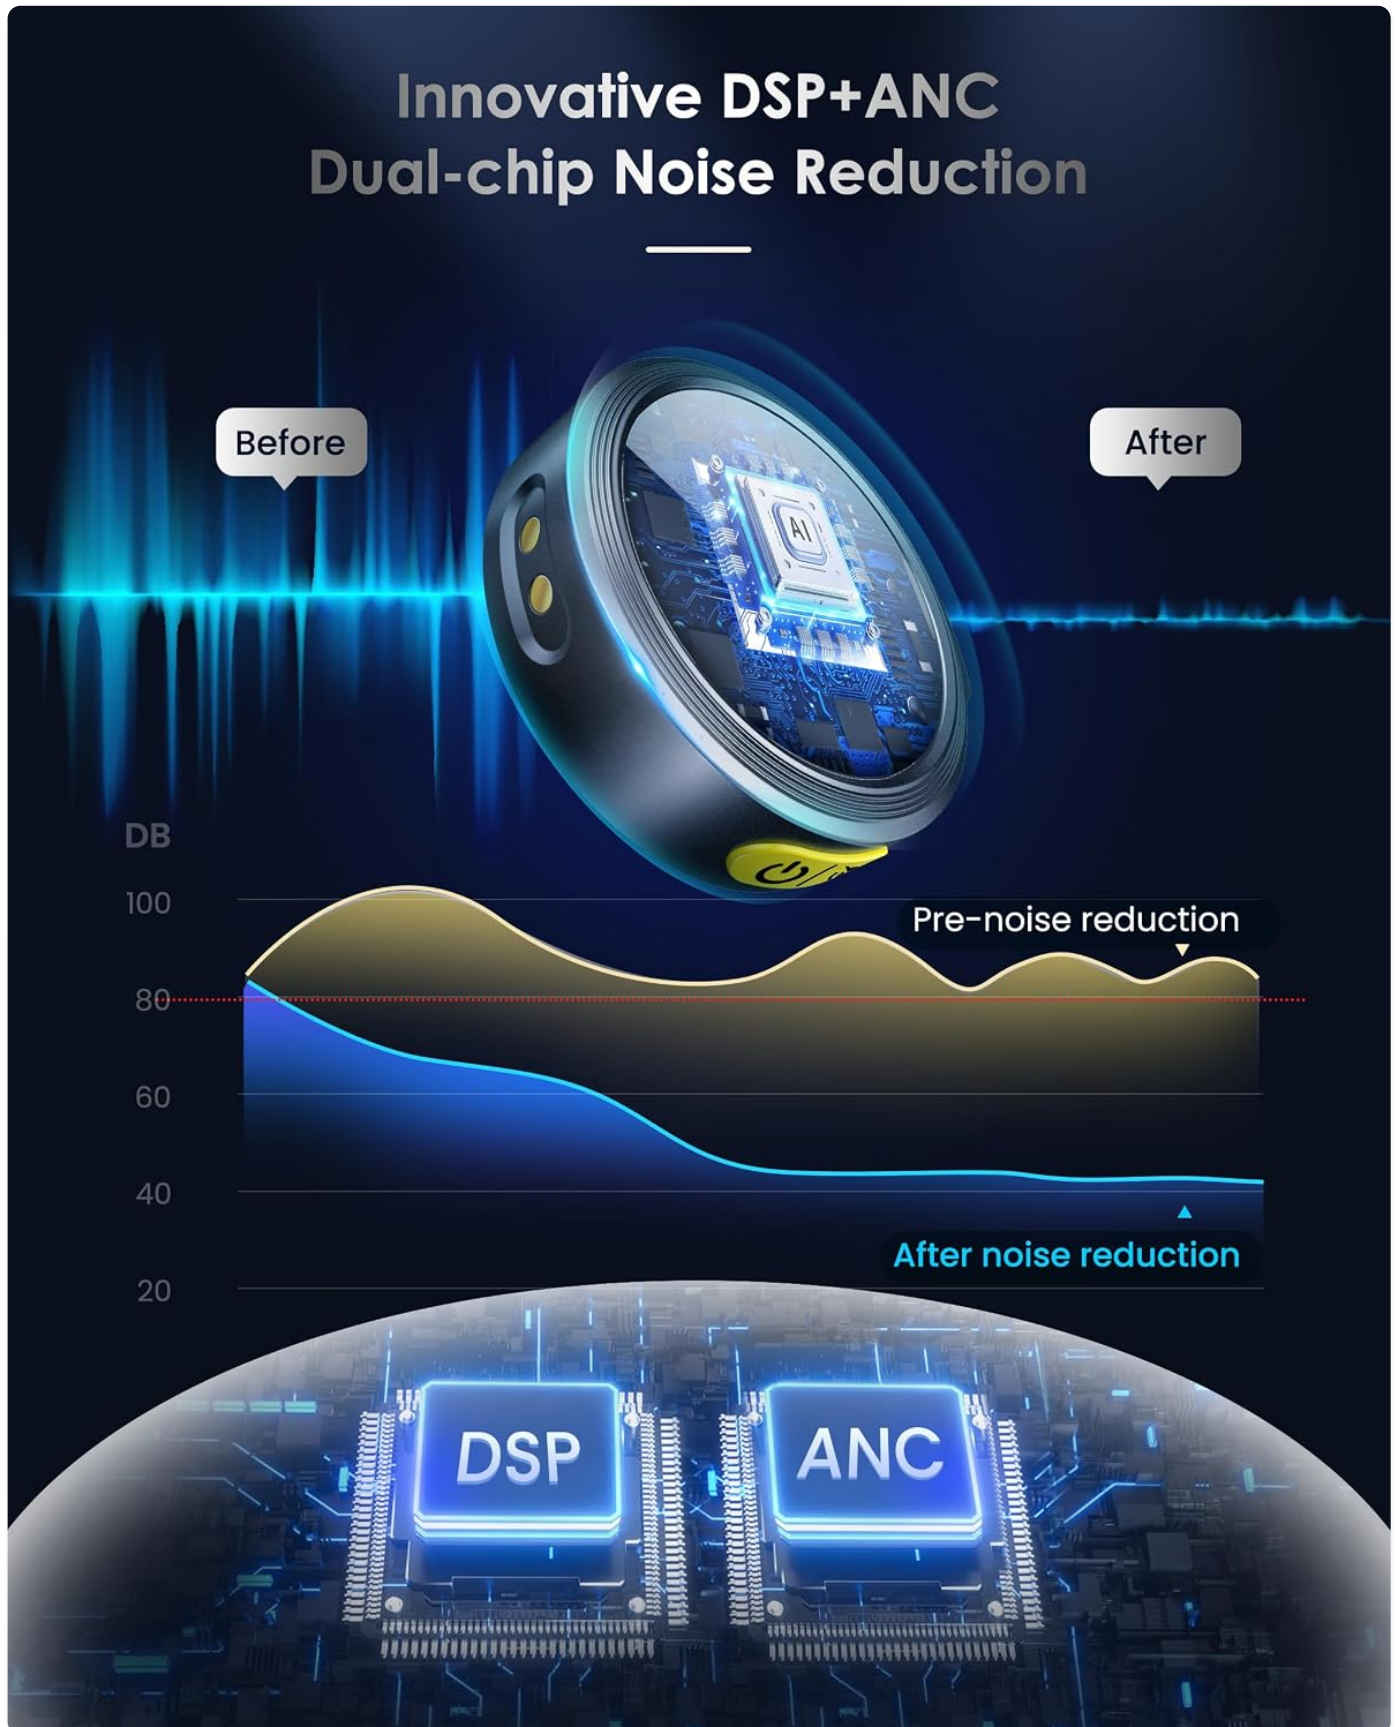


Figure 4: Illustration of DSP+ANC Dual-chip Noise Reduction in action.

Battery Life and Range

Each microphone provides up to 14 hours of continuous recording on a single charge. The charging case extends the total usage time by providing an additional 42 hours of power, allowing for prolonged recording sessions.

The system supports an unobstructed transmission range of up to 300 feet (approximately 91 meters), ensuring stable and clear audio even over considerable distances. In environments with obstacles, the transmission distance can still reach up to 100 feet (approximately 30 meters).

Long Battery Life

worry-free power

Dual Microphones with
14-Hour Battery Life

42 Hours from Charging Case

Figure 5: Extended battery life of the Lincisoonic Wireless Lavalier Microphone system.

Long Range Wireless Operation

- Seamless 300ft Transmission: Enjoy uninterrupted audio with a range of up to 300 feet when facing the transmitter
- Back-to Transmission Test at 100 Feet: The transmission distance can reach up to 100 feet even in the presence of obstacles.

300FT

Transmission Distance Comparison

Lincisoonic 2.4G wireless tech

————— 300ft

Other Bluetooth tech

————— 66ft

Figure 6: Long-range wireless transmission capability.

MAINTENANCE

Cleaning

To maintain optimal performance and hygiene, regularly clean your microphone system:

- Use a soft, dry, lint-free cloth to wipe the surfaces of the microphones, receiver, and charging case.
- For stubborn dirt, slightly dampen the cloth with water or a mild, non-abrasive cleaner. Ensure no liquid enters the microphone grilles or charging ports.
- Clean the charging contacts on the microphones and inside the charging case periodically with a dry cotton swab to ensure proper charging.
- The wind muff can be gently cleaned with a soft brush or by hand-washing with mild soap and water, then air-dried completely before reattachment.

Storage

Proper storage helps extend the lifespan of your device:

- Store the microphone system in its charging case when not in use to protect it from dust, dirt, and physical damage.
- Keep the device in a cool, dry place, away from direct sunlight, extreme temperatures, and high humidity.
- Avoid storing the device with completely depleted batteries for extended periods. Charge it periodically (e.g., every 3 months) if not used regularly.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Microphone not connecting/pairing.	Receiver not fully inserted. Microphone not powered on. Low battery on microphone or receiver. Interference.	Ensure the receiver is fully and securely plugged into your device's port. Remove any bulky phone cases. Ensure microphones are removed from the charging case to power on automatically. Charge the microphones and charging case fully. Move away from other 2.4GHz devices or strong electromagnetic fields.
Poor audio quality / Background noise.	Incorrect sound mode. Microphone placement. Environmental noise. Distance from receiver.	Switch to "Noise Reduction" mode using the MFB button. Ensure the microphone is positioned correctly and close to the sound source. Utilize the included wind muff in windy conditions. Ensure you are within the recommended operating range (up to 300ft unobstructed, 100ft with obstacles).
Charging case display inaccurate.	New unit battery calibration.	This is normal for new lithium batteries. Charge both TX units at least twice to allow for accurate readings.
Glitch sound at the start of recording.	Software or device-specific issue.	Ensure your recording application and device operating system are up to date. Try a different recording application. Restart your device before recording. If the issue persists, contact customer support.

Specifications

Feature	Detail
Model Number	A6
Brand	Lincisoonic
Connectivity Technology	Lightning, 2.4GHz Wireless
Connector Type	Lightning
Microphone Form Factor	Lavalier
Polar Pattern	Unidirectional
Number of Channels	1
Battery Type	Lithium Polymer
Microphone Battery Life	Up to 14 hours (per microphone)
Charging Case Battery Life	Additional 42 hours
Transmission Range	Up to 300ft (unobstructed)
Sound Pressure Level (SPL)	112dB
Signal-to-Noise Ratio (SNR)	70dB
Audio Recording Quality	48kHz/24bit
Noise Cancellation	Advanced HD Noise Cancellation 2.0
Item Weight	5.9 ounces (total package)
Package Dimensions	5.2 x 2.95 x 1.85 inches
Compatible Devices	Smartphone (Lightning port)

Warranty and Support

Lincisoonic is committed to providing high-quality products and excellent customer service. Your Wireless Lavalier Microphone comes with the following support:

- 1-Year Warranty:** Enjoy 1 year of support and satisfactory solutions for any manufacturing defects or performance issues.

- **1-Year Free Replacement:** Eligible for a free replacement within one year of purchase for covered issues.
- **30-Day Return & Exchange Service:** Hassle-free returns and exchanges within 30 days of purchase.
- **24-Hour Prompt Response:** Expect prompt responses to your inquiries via email.



Figure 7: Lincisoonic Warranty and Support overview.

For further assistance, please visit the official Lincisoonic store or contact customer support through the platform where you purchased the product.

[Visit the Lincisoonic Store](#)

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

[Submit question](#)

Open the live page

<https://manuals.plus/asin/B0DP4NZFRM>

More documents and user manuals: <https://manuals.plus/>