Fanbulous F-JP62BK-1D01

Fanbulous 62 Inch Large Ceiling Fan with Light User Manual

Model: F-JP62BK-1D01

Introduction

This manual provides detailed instructions for the safe installation, operation, and maintenance of your Fanbulous 62 Inch Large Ceiling Fan with Light. Please read all instructions carefully before beginning installation and retain this manual for future reference.



Image: The Fanbulous 62-inch ceiling fan, showcasing its sleek black design with integrated LED light, suitable for large indoor or covered outdoor spaces.

Safety Information

Always follow basic safety precautions when installing and operating electrical appliances to reduce the risk of fire, electric shock, and personal injury.

- Ensure the power is turned off at the circuit breaker before installation or maintenance.
- All wiring must be in accordance with national and local electrical codes.
- The mounting structure must be capable of supporting the weight of the fan (approximately 17.64 lbs).
- Do not operate the fan with damaged blades or housing.
- Keep hands, hair, and clothing clear of moving fan blades.

Package Contents

Verify that all components are present before beginning installation:

- Fan Motor Assembly
- Fan Blades (7 dual-finish blades: modern black and retro wood grain)
- LED Light Kit (24W 3CCT LED)
- Remote Control with Holder
- Downrods (5", 10", and 15" options)
- Mounting Bracket
- Hardware Pack (screws, washers, wire nuts)
- Instruction Manual



Image: Various components of the Fanbulous ceiling fan, including the motor housing, dual-finish blades, downrods, and remote control, laid out for assembly.

Setup and Installation

Follow these steps for proper installation. It is recommended to have two people for certain steps.

1. Prepare for Installation

1. Turn off power at the circuit breaker or fuse box.
2. Ensure the electrical box is securely mounted and capable of supporting the fan's weight.

2. Install Mounting Bracket

Secure the mounting bracket to the ceiling electrical box using the provided screws and washers. Ensure it is firmly attached.



Image: A diagram illustrating the dimensions of the 62-inch ceiling fan and its components, including the various downrod lengths (5", 10", 15") and the 15-degree sloped ceiling installation capability.

3. Assemble Downrod and Fan Motor

1. Remove the pin from the downrod.

2. Thread the fan wires through the downrod.
3. Insert the downrod into the fan motor assembly.
4. Secure the downrod to the motor assembly using the removed pin and screws.
5. Slide the canopy and coupling cover onto the downrod.

4. Wire Connections

Carefully connect the fan's electrical wires to the household wiring according to the wiring diagram in the manual. Use the provided wire nuts to secure connections. Ensure all connections are tight and insulated.

5. Attach Fan Blades

Attach each of the seven fan blades to the motor housing using the provided screws. The blades are dual-sided, allowing you to choose between modern black and retro wood grain finishes.

6. Install LED Light Kit

Connect the LED light kit wires to the corresponding wires on the fan motor assembly. Secure the LED light kit to the bottom of the fan housing with the provided screws.



Image: A close-up of the fan's 24W Big LED Light, highlighting its bright illumination and energy efficiency.

Operating Instructions

Your Fanbulous ceiling fan is controlled by a multifunctional remote control.



Image: The remote control for the Fanbulous ceiling fan, showing buttons for fan speed, light control, timer settings, and reverse function.

Remote Control Functions:

- **Power Button:** Turns the fan and light on/off.

- **Fan Speed (1-6):** Adjusts fan speed from low (1) to high (6).
- **Light On/Off (CCT Switch):** Toggles the light on/off and cycles through 3 color temperatures (3000K Warm Light, 4000K Natural Light, 6000K Cold White Light).
- **Timer (1H/4H/8H):** Sets the fan to turn off automatically after 1, 4, or 8 hours.
- **Airflow Direction (Reverse):** Changes the direction of fan rotation for summer (downward airflow) or winter (upward airflow for air circulation).
- **Natural Wind Mode:** Simulates natural breeze by varying fan speed.
- **Mute:** Silences remote control beeps.
- **Delay Off (5 minutes):** Turns off the fan after 5 minutes.

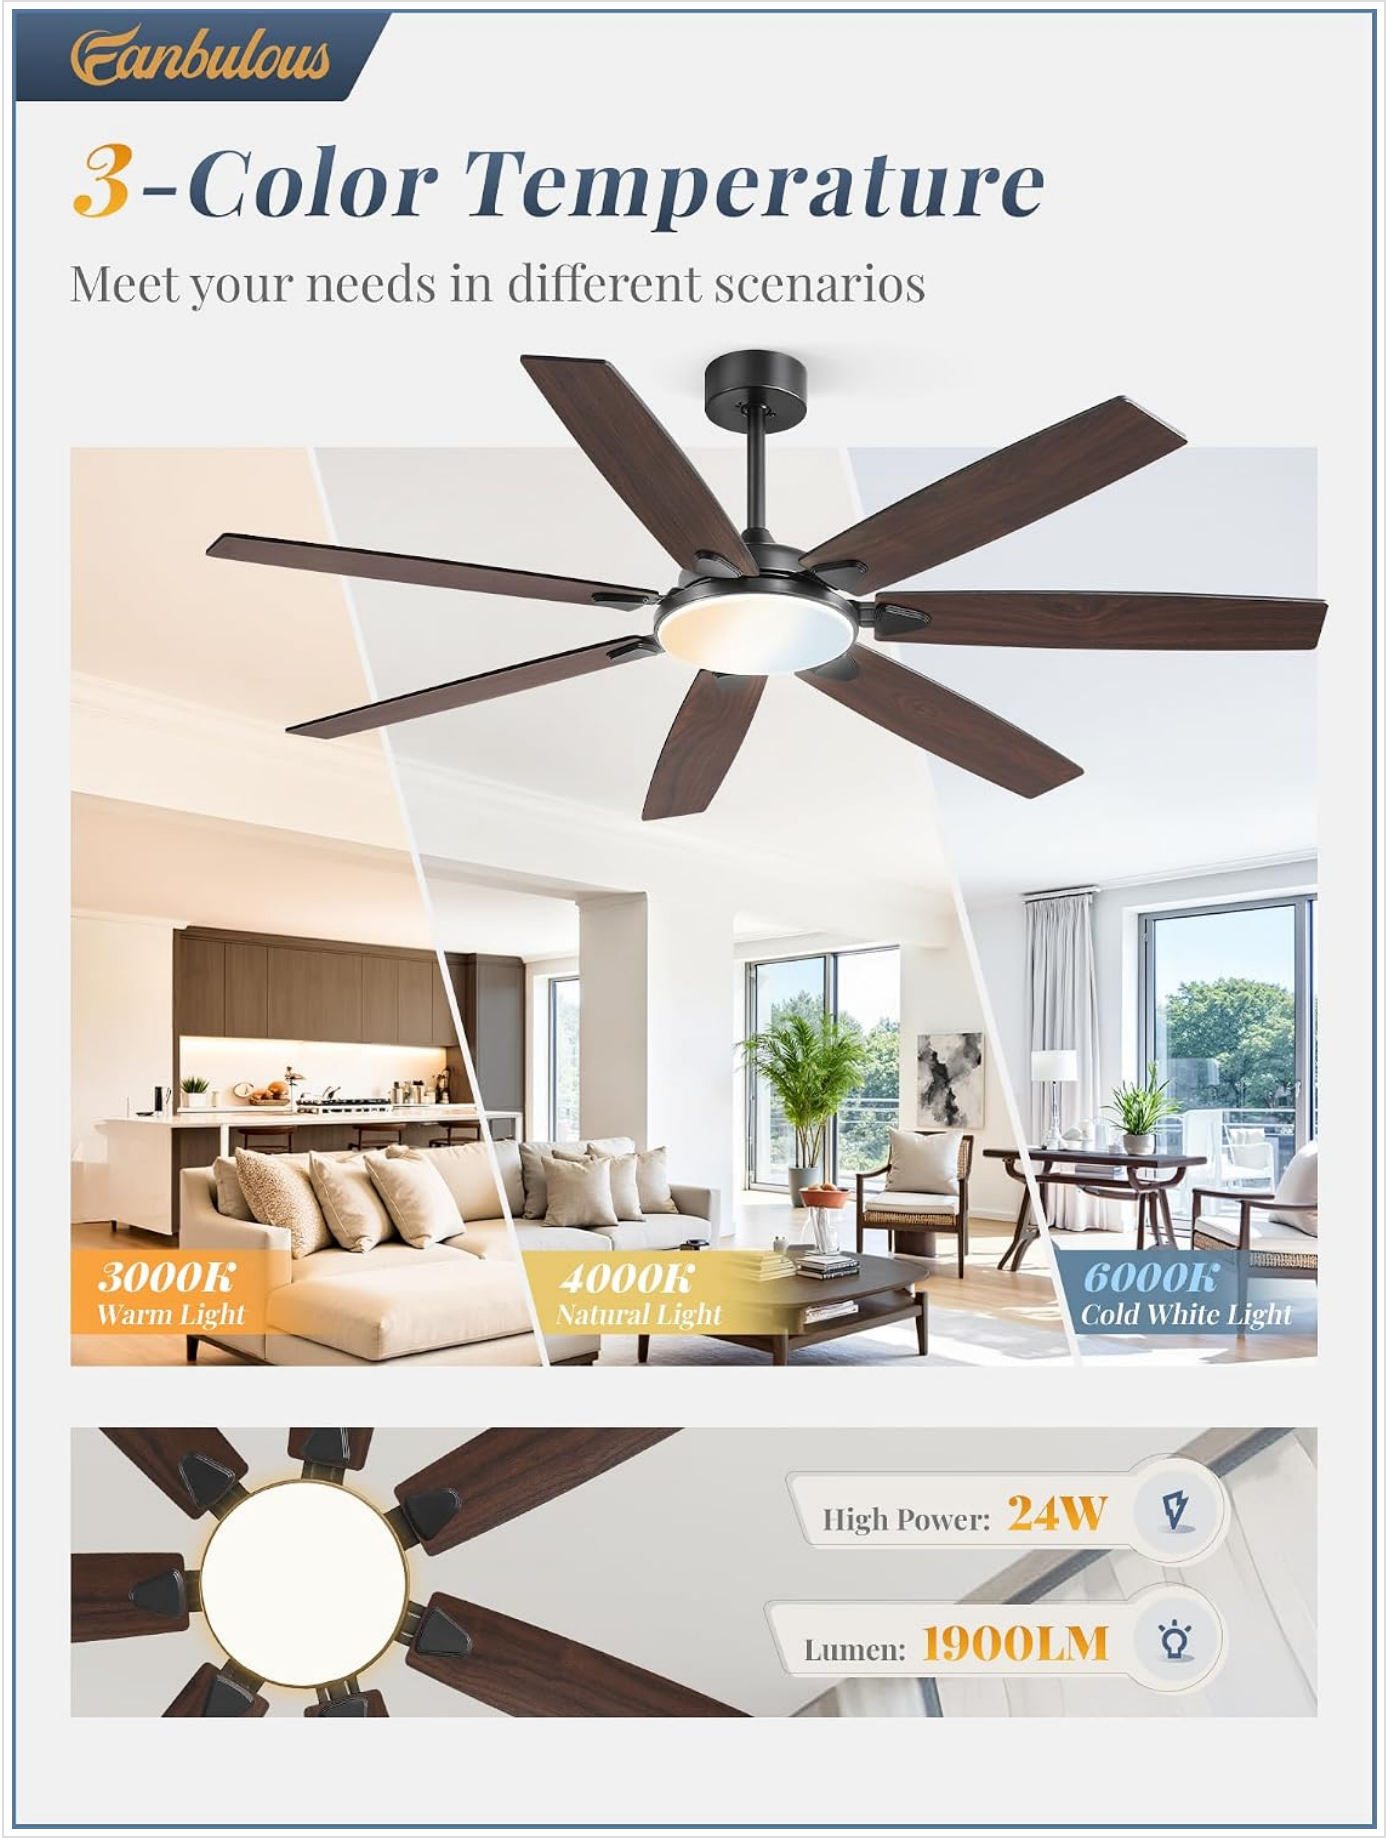


Image: Visual representation of the three color temperature options (3000K Warm Light, 4000K Natural Light, 6000K Cold White Light) available with the fan's LED light.

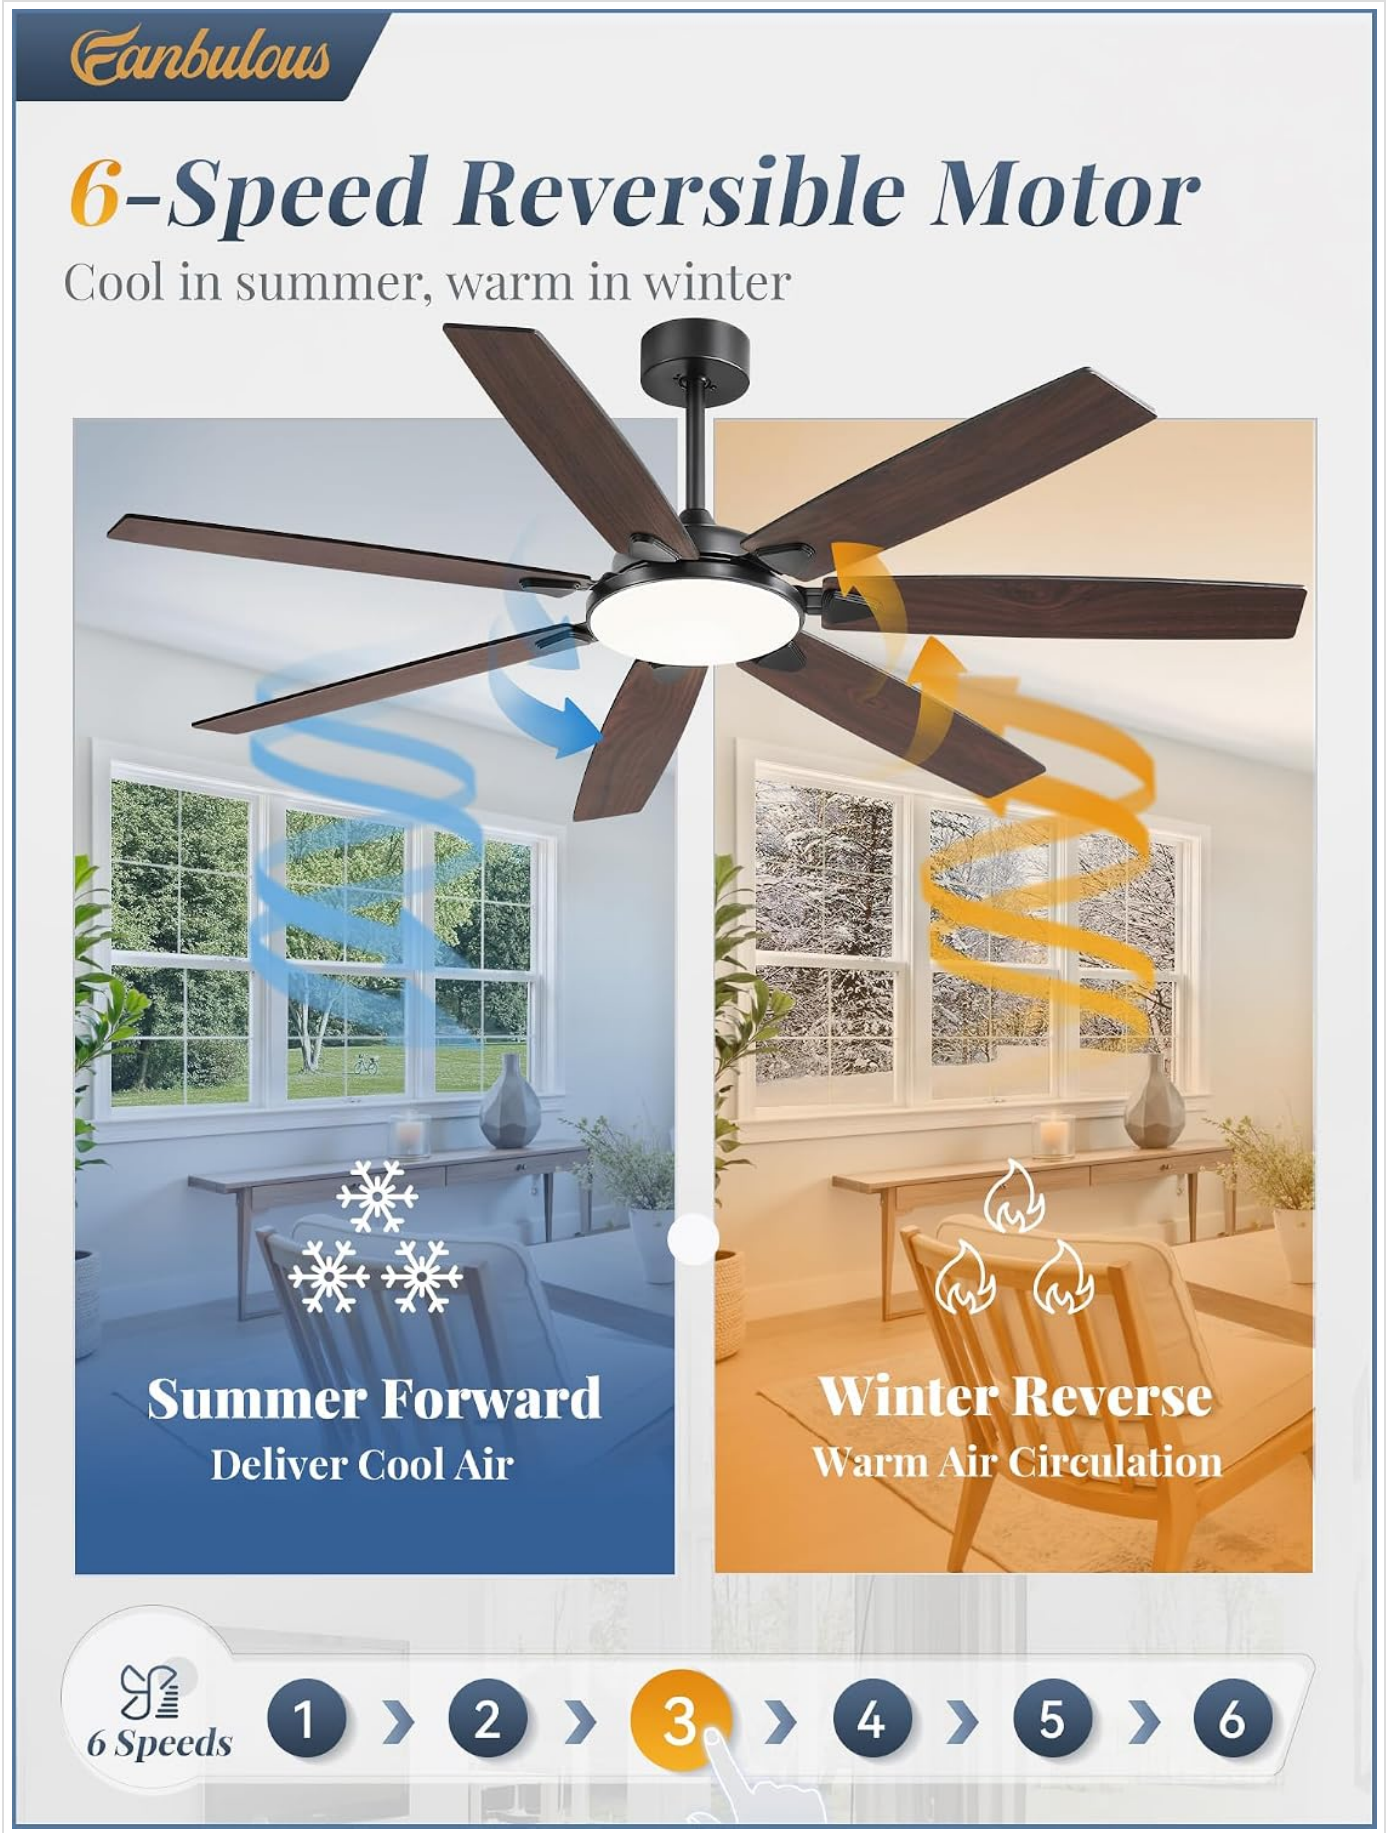


Image: Diagram showing the reversible DC motor function, illustrating downward airflow for summer cooling and upward airflow for winter air circulation.

Maintenance

Regular maintenance ensures optimal performance and longevity of your ceiling fan.

- **Cleaning:** Use a soft, damp cloth to clean the fan blades and motor housing. Do not use abrasive cleaners or solvents.
- **Blade Screws:** Periodically check and tighten all blade screws to prevent wobbling and noise.
- **Light Cover:** The LED light is integrated and does not require bulb replacement. Clean the light cover gently with a soft cloth.
- **Motor Lubrication:** The DC motor is permanently lubricated and does not require additional oiling.

Troubleshooting

Problem	Possible Cause	Solution
Fan does not start	No power to the fan; Loose wire connections; Remote control battery low.	Check circuit breaker/fuse; Verify all wire connections are secure; Replace remote control batteries.
Fan wobbles	Loose blade screws; Unbalanced blades; Loose mounting bracket.	Tighten all blade screws; Ensure blades are installed correctly; Check mounting bracket for secure attachment.
Light does not work	Loose wire connection to light kit; Faulty LED light kit.	Check light kit wire connections; Contact customer service if LED light kit is faulty.
Remote control not working	Low battery; Incorrect pairing.	Replace batteries; Refer to remote pairing instructions in the full manual.

Specifications

- **Brand:** Fanbulous
- **Model Name:** F-JP62BK-1D01
- **Color:** Black
- **Size:** 62 inch
- **Power Source:** AC120V
- **Voltage:** 120 Volts (AC)
- **Item Weight:** 17.64 Pounds
- **Product Dimensions:** 25.28"D x 13.98"W x 7.87"H
- **Number of Power Levels:** 6 (Fan Speeds)
- **Special Feature:** 3CCT LED Light, Adjustable Height (via downrods), Quiet Operation (below 35 decibels), Remote Controlled, Timer (1/4/8-hour)
- **Room Type:** Bedroom, Garage, Kitchen, Living Room, outdoor (covered)
- **Indoor/Outdoor Usage:** Indoor (suitable for covered outdoor areas, avoid direct rain exposure)

Warranty and Support

Fanbulous offers a 30-day no-hassle return policy and a 2-year after-sales service for this product. For any questions, issues, or to report a problem with mismatched fan blades or brackets, please contact our dedicated customer service team for full support and peace of mind.

Please refer to the contact information provided on the product packaging or the official Fanbulous website for direct support.

© 2025 Fanbulous. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Answered questions about this manual

Can I pair 3 Fanbulous F-JP62BK-1D01 ceiling fans to one remote control?

The provided manual for the Fanbulous F-JP62BK-1D01 ceiling fan describes the functions of its multifunctional remote control but does not specify whether a single remote can be paired with multiple fans. It only states...

Read full answer