

## Togala P99

# Togala Smart Watch P99 User Manual

MODEL: P99

## Introduction





This manual provides detailed instructions for setting up, operating, and maintaining your Togala Smart Watch P99. Please read this guide thoroughly to ensure proper use and to fully utilize all available features. The Togala Smart Watch P99 is designed to assist with health monitoring, fitness tracking, and communication, compatible with both Android and iOS devices.

## Package Contents

Upon opening the package, verify that all the following items are present:

- Togala Smart Watch P99 (with strap)
- Charging Cable
- User Manual

### A: First of all, please be sure to connect our smart watch through the “GloryFit” APP.

 <p>1. Turn on the “Bluetooth” function of your phone.</p>	 <p>2. Open the “Google Play” or the “APP Store”.</p>	 <p>3. Search for “GloryFit” APP and download it.</p>	 <p>4. Open the APP, click “Please connect device”, click “Select device”, find “P99” and bind it.</p>
---	--	---	---

### B: Perform the following steps to enable the answer/call function.





 <p>1. After selecting “P99” to connect, on the mobile phone system popup pairing request, select pairing</p>	 <p>2. Turn on the call Bluetooth switch on the watch (used when the watch cannot make calls and play media sound).</p>	 <p>3. In the phone settings, in the system bluetooth, turn on these permissions of the P99.</p>	 <p>4. Once connected, you could use the watch to answer/make calls anytime.</p>
--	--	--	---

Image: Contents of the Togala Smart Watch P99 package, including the watch, charging cable, and user manual, alongside product dimensions.

# Setup

## 1. Initial Device Pairing

1. **Turn on Bluetooth:** Activate the Bluetooth function on your smartphone.
2. **Download the App:** Search for and download the "GloryFit" application from the Google Play Store (for Android) or the Apple App Store (for iOS).
3. **Open and Connect:** Launch the GloryFit app. Navigate to the device connection section, select "Connect device," find "P99" in the list, and bind it to your smartphone.

## 2. Enabling Bluetooth Call Function

To use the call feature, an additional Bluetooth connection is required:

1. After successfully connecting the P99 via the GloryFit app, a pop-up pairing request for "P99" should appear on your mobile phone. Accept this request.
2. On the watch, enable the Bluetooth call switch. This is typically found in the watch's settings menu.
3. In your phone's Bluetooth settings, ensure that the "P99" connection has permissions for calls and media audio.
4. Once connected, you can make and answer calls directly from your watch.

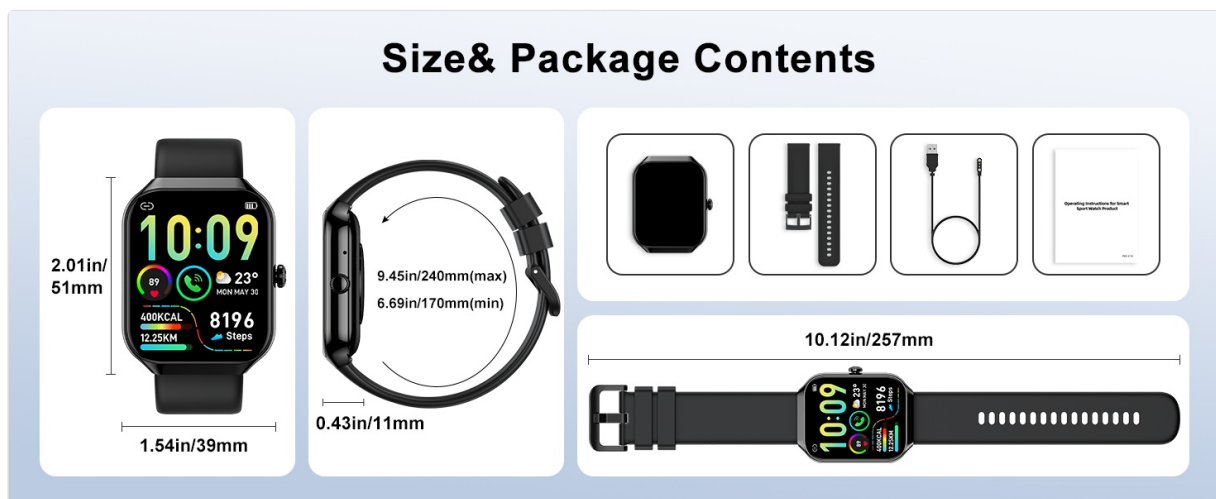


Image: Visual guide for downloading the GloryFit app, connecting the P99 smartwatch via Bluetooth, and enabling the call function.

## Operating Instructions

### 1. Display and Customization

The Togala Smart Watch P99 features a 1.96-inch TFT-LCD HD touch screen with 320\*386 resolution and 4 levels of brightness adjustment. You can personalize your watch face through the GloryFit app, which offers over 250 online dial wallpapers. You can also upload your favorite photos to create custom watch faces.

# Ultra-long Battery Life

**2 Hours**  
Fast Charging

**7 Days**  
Normal Use

**30 Days**  
Standby



Image: The smartwatch screen showcasing different watch face designs and options for personalization.

## Togala P99 Smart Watch

- 1.96" Big Screen
- Bluetooth Call
- 100+ Sport Modes
- IP68 Waterproof

Apple iOS 9.0    Android 5.0

Image: Instructions on how to personalize the watch face using the GloryFit app, including selecting from a catalog or uploading custom images.

## 2. Health Monitoring

The P99 smartwatch is equipped with high-performance optical sensors for continuous health tracking:

- **Heart Rate Monitoring:** Provides 24-hour real-time heart rate data.
- **Blood Oxygen (SpO2) Monitoring:** Measures blood oxygen levels.
- **Sleep Monitoring:** Tracks sleep patterns, including deep sleep, light sleep, and awake times.
- **Sedentary Reminder:** Alerts you to move after periods of inactivity.
- **Female Menstrual Record:** Supports tracking of menstrual cycles.



Image: The smartwatch screen showing various health metrics such as calories burned, steps taken, distance covered, and current heart rate.

## Bluetooth Call

Bluetooth connection to your phone, the P99 can be used to make and answer calls.



Image: A user wearing the smartwatch, with the screen displaying real-time heart rate data and historical trends within the app.

## Improve your sleep habits



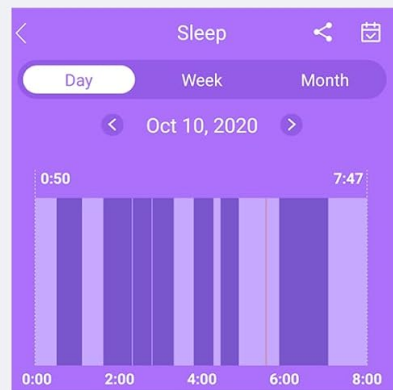


Image: The smartwatch screen displaying sleep duration and quality, categorized into light sleep, REM, deep sleep, and awake time.

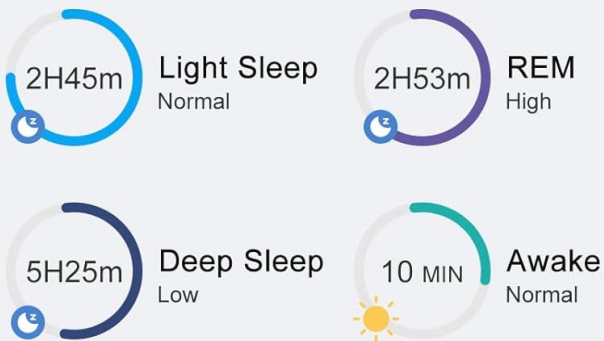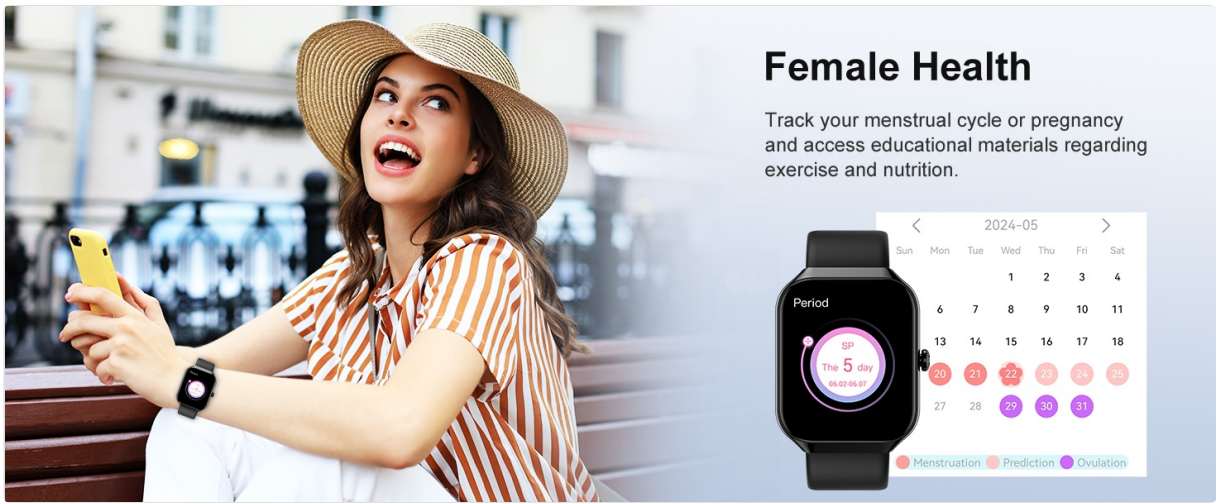

## Female Health

Track your menstrual cycle or pregnancy and access educational materials regarding exercise and nutrition.

Image: The smartwatch displaying a calendar interface for tracking menstrual cycles and related health information.

### 3. Sports Modes

The P99 supports over 113 sports modes, including walking, running, cycling, and soccer. During workouts, the watch tracks and displays key data such as steps, distance, and calories burned, helping you monitor your progress towards fitness goals.

# 1.96" HD Full Touch Screen

200+ online watch faces in GloryFit app


## Personalize Your Watch Face

Image: The smartwatch screen overlaid on a scenic outdoor hiking image, displaying heart rate, steps, and calories during

an activity.

## Connect the world on your hand

Alert you of calls, messages, and notifications from the APP you choose with vibration showing on your wrist.



f I have arrived at the basketball court.



Image: The smartwatch screen showing a selection of sports modes, such as outdoor run, indoor run, and outdoor walk, with icons representing over 100 different activities.

### 4. Call and Notification Features

Utilizing Bluetooth 5.3, the P99 provides a stable connection for communication. With its built-in microphone and Hi-Fi speaker, you can answer and make calls directly from your wrist. The watch also supports notifications from various applications, including WhatsApp, Facebook, Instagram, Twitter, Skype, and Line, displaying them with a vibration alert.

# Call Bluetooth 5.3

Conveniently dial and call /answer /reject /mute an incoming call through your smartwatch

-  Built-in Mic
-  Hi-Fi Speaker
-  Call Records
-  100+Contacts



Image: The smartwatch screen showing an incoming call notification with options to answer or reject, along with a dial pad and contact list.

## 24/7 Track Your Heart Rate

More sports options with your friends.

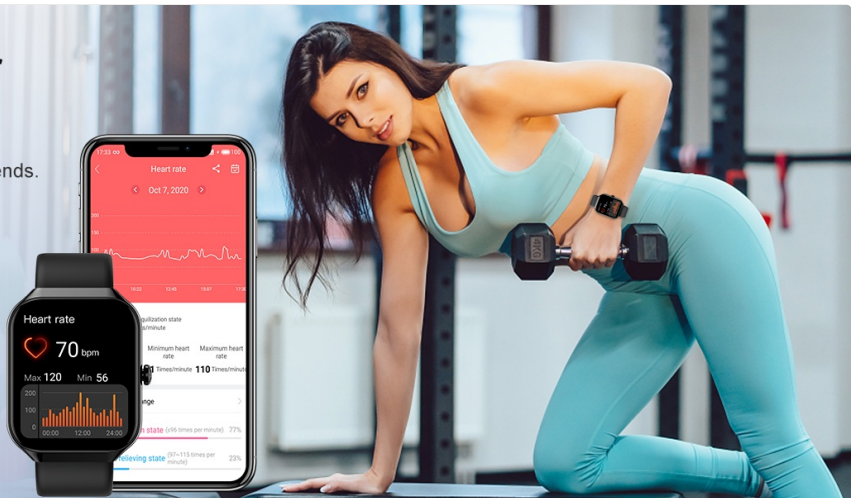



Image: A user interacting with the smartwatch to make or answer a call, highlighting the built-in microphone, Hi-Fi speaker, call records, and contact access.

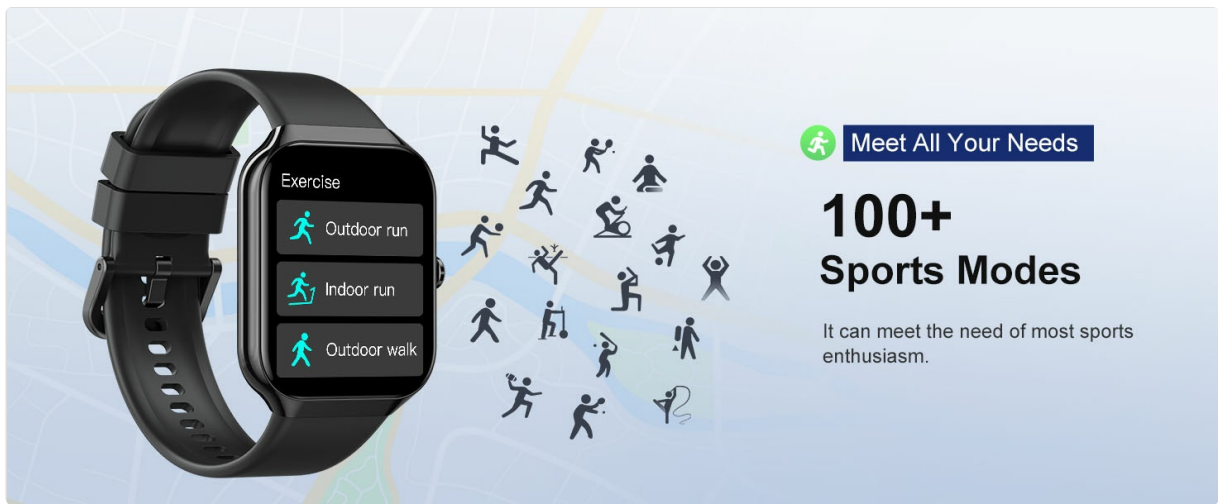


Image: A user viewing a notification on the smartwatch, with icons representing various social media and messaging applications.

## 5. Other Practical Functions

The Togala Smart Watch P99 includes a variety of additional features for daily convenience:

- Alarm Clock
- Stopwatch
- Timer
- Camera Control
- Find Your Phone
- Calculator
- Music Control
- Weather Forecast
- Calendar
- Brightness Adjustment
- Breath Training

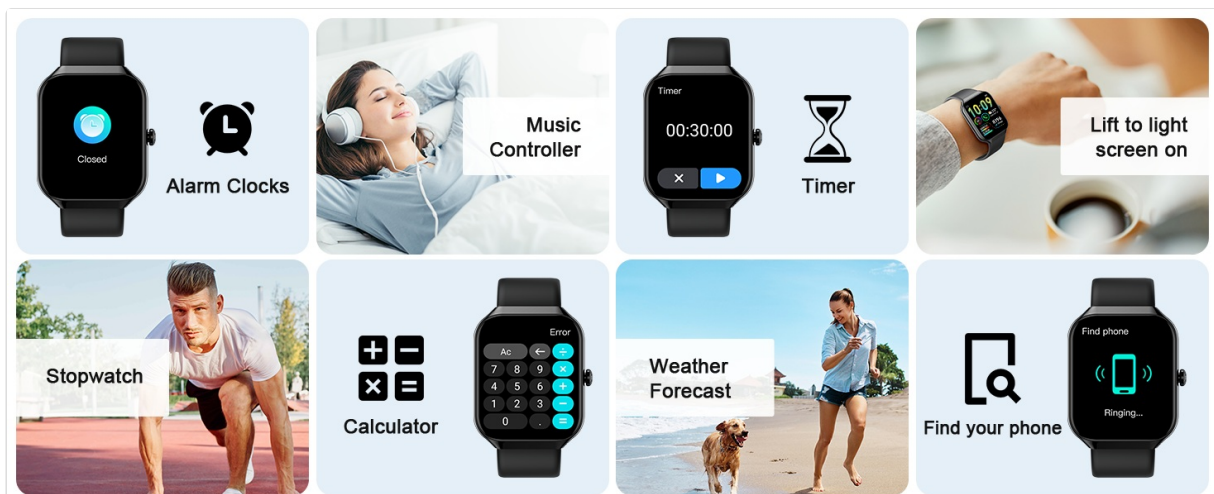


Image: A collage of smartwatch screens demonstrating features such as alarm clocks, music control, timers, stopwatch, calculator, weather forecast, and find my phone.

## Maintenance

## 1. Waterproofing Guidelines

The Togala Smart Watch P99 has an IP68 waterproof rating, meaning it is resistant to dust and can withstand immersion in water up to 1.5 meters for 30 minutes. It is suitable for daily activities such as washing hands and showering. However, it is not recommended for use in hot water, saunas, or during deep diving, as extreme temperatures or high-pressure water may compromise its seal.



**IP68**  
Waterproof



Rinse



Bathe



Sweat



Image: A person swimming while wearing the Togala Smart Watch P99, illustrating its IP68 waterproof capability for activities like rinsing, bathing, and sweating.

## IP68 Waterproof

Smart watch with IP68 waterproof function, can shower, rain, swimming, etc. Not applicable to high and corrosive places like spa and seawater etc.



Image: A person waterskiing while wearing the smartwatch, indicating its suitability for various water-related activities within its IP68 rating.

## 2. Battery Life and Charging

The P99 is equipped with a 310mAh battery. A full charge takes approximately 2 hours, providing up to 7 days of typical usage and approximately 30 days of standby time. Use the provided charging cable and a standard USB power adapter (not included) for charging.

### Ultra-long Battery Life

**2 Hours**  
Fast Charging

**7 Days**  
Normal Use

**30 Days**  
Standby



Image: The smartwatch connected to its charging cable, with text indicating 2 hours for fast charging, 7 days for normal use, and 30 days of standby time.

## Troubleshooting

---

- **Watch not turning on:** Ensure the watch is fully charged. Connect it to the charging cable and a power source for at least 30 minutes.
- **Unable to pair with phone:**
  - a. Ensure Bluetooth is enabled on your phone and the watch.
  - b. Make sure the GloryFit app is installed and running.
  - c. Keep the watch close to your phone during pairing.
  - d. Restart both your phone and the watch, then try pairing again.
  - e. If previously paired, remove the watch from your phone's Bluetooth device list and try pairing from scratch.
- **Call function not working:**
  - a. Verify that the "P99" Bluetooth connection for calls is active in your phone's Bluetooth settings.
  - b. Check if the Bluetooth call switch is enabled on the watch.
  - c. Ensure the watch has necessary permissions on your phone for calls and audio.
- **Notifications not appearing:**
  - a. Confirm that app notifications are enabled within the GloryFit app settings.
  - b. Check your phone's system settings to ensure the GloryFit app has permission to access notifications.
  - c. Ensure the watch is connected to your phone via Bluetooth.
- **Inaccurate health data:** Ensure the watch is worn snugly on your wrist, about one finger's width from your wrist bone. Avoid excessive movement during measurements.

## Specifications

---

- **Model:** P99
- **Screen:** 1.96-inch TFT-LCD HD Touch Screen, 320\*386 resolution
- **Connectivity:** Bluetooth 5.3
- **Battery Capacity:** 310mAh
- **Charging Time:** Approximately 2 hours
- **Battery Life:** Up to 7 days (typical use), 30 days (standby)
- **Waterproof Rating:** IP68
- **Operating System:** Android Wear 1.0 (as per product specifications, though typically refers to the watch's internal OS compatibility)
- **Compatibility:** Android 5.0 and above, iOS 9.0 and above
- **Health Monitoring:** 24/7 Heart Rate, Blood Oxygen (SpO2), Sleep Tracking, Sedentary Reminder, Female Menstrual Record
- **Sports Modes:** 113+
- **Features:** Bluetooth Calls (microphone & speaker), Notifications, Alarm Clock, Stopwatch, Timer,

Camera Control, Find Phone, Calculator, Music Control, Weather Forecast, Calendar, Brightness Adjustment, Breath Training

- **Item Weight:** 2.89 ounces
- **Package Dimensions:** 6.5 x 3.74 x 0.75 inches

## Warranty and Support

---

For warranty information or technical support, please refer to the contact details provided with your purchase or visit the official Togala website. Keep your purchase receipt as proof of purchase for any warranty claims.