

Compaq CMQ200W

Compaq CMQ 200W Bluetooth Speaker User Manual

Model: CMQ200W

INTRODUCTION

Thank you for choosing the Compaq CMQ 200W Bluetooth Speaker. This powerful wireless speaker is designed to deliver exceptional audio quality with features like TWS pairing, Bluetooth 5.3 connectivity, IPX6 waterproof rating, and dynamic LED lighting. This manual provides essential information for setting up, operating, and maintaining your speaker to ensure optimal performance and longevity.

SAFETY INFORMATION

- Do not expose the speaker to extreme temperatures or direct sunlight for prolonged periods.
- Avoid dropping or subjecting the speaker to strong impacts.
- Keep the speaker away from medical devices.
- Do not attempt to disassemble, repair, or modify the speaker yourself. Refer all servicing to qualified personnel.
- Ensure charging ports are dry before connecting the charging cable.
- Use only the specified charging cable and power adapter.
- Dispose of the product and its battery responsibly according to local regulations.

PACKAGE CONTENTS

Please check the package for the following items:

- Compaq CMQ 200W Bluetooth Speaker
- Microphone (if included with your model)
- Charging Cable
- Quick Start Guide

PRODUCT OVERVIEW



Front view of the Compaq CMQ 200W Bluetooth Speaker, showcasing the speaker grille, Compaq logo, and control panel with illuminated buttons.

FEEL THE BEAT, LIVE THE MOMENT.



The Compaq CMQ 200W Bluetooth Speaker shown alongside its included microphone, highlighting its karaoke or public address capabilities.

Familiarize yourself with the various buttons and ports on your speaker:

- **Power Button:** Turns the speaker on/off.
- **Bluetooth Button:** Initiates Bluetooth pairing mode.
- **Volume Up/Next Track Button:** Increases volume, skips to the next track.
- **Volume Down/Previous Track Button:** Decreases volume, goes to the previous track.
- **Play/Pause Button:** Plays or pauses audio.
- **Mode Button:** Switches between input modes (Bluetooth, AUX, USB, etc.).

- **LED Light Button:** Controls the dynamic LED lighting effects.
- **TWS Button:** Activates True Wireless Stereo pairing.
- **Charging Port:** USB-C or Micro-USB port for charging.
- **AUX-in Port:** For wired audio connection.
- **Microphone Input:** For connecting the included microphone.

SETUP

Charging the Speaker

1. Before first use, fully charge the speaker.
2. Connect the charging cable to the speaker's charging port and the other end to a compatible USB power adapter (not included) or a computer's USB port.
3. The LED indicator will show charging status and turn off or change color when fully charged.
4. A full charge typically takes approximately 3-4 hours.

Powering On/Off

- To power on, press and hold the **Power Button** for 2-3 seconds. You will hear an audible prompt.
- To power off, press and hold the **Power Button** again for 2-3 seconds.

OPERATING INSTRUCTIONS

Bluetooth Pairing



The Compaq CMQ 200W Bluetooth Speaker highlighting its Bluetooth connectivity feature.

1. Ensure the speaker is powered on and in Bluetooth mode (indicated by a flashing blue LED). If not, press the **Mode Button** to switch.
2. On your mobile device, enable Bluetooth and search for available devices.
3. Select "Compaq CMQ 200W" from the list.
4. Once paired, the LED indicator will turn solid blue, and you will hear a confirmation sound.
5. The speaker will automatically reconnect to the last paired device when powered on, if within range.

True Wireless Stereo (TWS) Pairing



Two Compaq CMQ 200W Bluetooth Speakers shown together, illustrating the True Wireless Stereo (TWS) pairing capability for enhanced sound.

TWS allows you to connect two CMQ 200W speakers for a stereo sound experience.

1. Ensure both speakers are powered on and not connected to any Bluetooth device.
2. On one speaker (this will be the primary speaker), press the **TWS Button**. It will emit a sound indicating it's searching.
3. The two speakers will automatically connect to each other. You will hear a confirmation sound once paired.
4. Now, connect your mobile device to the primary speaker via Bluetooth as described above.
5. Audio will now play through both speakers in stereo.

Microphone Usage

Connect the microphone to the designated microphone input port on the speaker. Adjust microphone volume using the dedicated knob if available, or through the speaker's main volume controls.


LED Light Control

Press the **LED Light Button** to cycle through different lighting modes or to turn the lights off.

Volume and Playback Control

- **Volume Up:** Short press the **Volume Up/Next Track Button**.
- **Volume Down:** Short press the **Volume Down/Previous Track Button**.
- **Next Track:** Long press the **Volume Up/Next Track Button**.
- **Previous Track:** Long press the **Volume Down/Previous Track Button**.
- **Play/Pause:** Short press the **Play/Pause Button**.

IPX6 Waterproof Rating

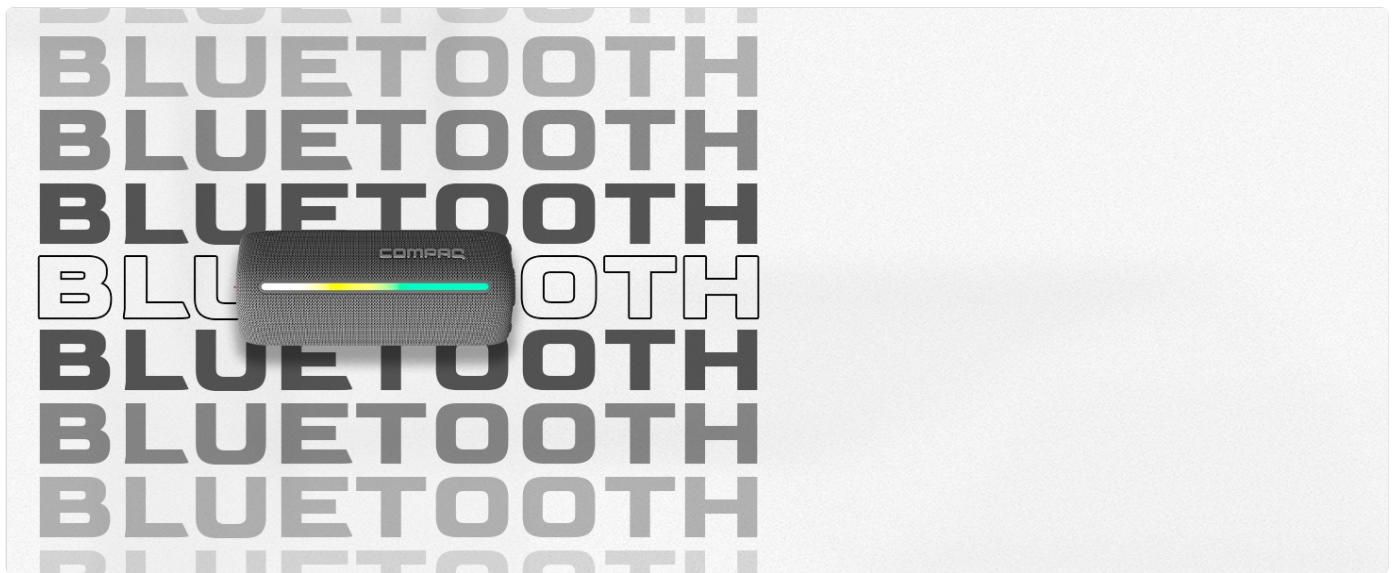

The Compaq CMQ 200W Bluetooth Speaker demonstrating its IPX6 waterproof capability, with water splashing on its surface near a pool.

The CMQ 200W speaker features an IPX6 waterproof rating, meaning it is protected against powerful water jets. It is suitable for outdoor use and can withstand splashes, rain, and even temporary exposure to strong water streams. **Do not submerge the speaker in water.** Ensure all port covers are securely closed before exposing the speaker to water.

MAINTENANCE

- Clean the speaker with a soft, damp cloth. Do not use abrasive cleaners or solvents.
- Store the speaker in a cool, dry place when not in use.
- Avoid exposing the speaker to extreme temperatures or humidity.
- Keep the charging port free of dust and debris.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Speaker does not turn on.	Battery is low or depleted.	Charge the speaker fully.
Cannot pair with Bluetooth device.	Speaker is not in pairing mode; device Bluetooth is off; speaker is too far.	Ensure speaker is in pairing mode. Turn on Bluetooth on your device. Move speaker closer to device. Forget previous pairings on device and try again.
No sound.	Volume is too low; speaker is paused; incorrect input mode.	Increase volume on speaker and device. Press Play/Pause. Press Mode button to select correct input.
TWS pairing fails.	Speakers are too far apart; one speaker is already paired to a device.	Ensure both speakers are close to each other and not connected to any other Bluetooth device before initiating TWS pairing.
Microphone not working.	Microphone not properly connected; microphone volume too low.	Ensure microphone is securely plugged in. Adjust microphone volume.

SPECIFICATIONS

- **Model:** CMQ200W
- **Speaker Type:** Portable Speaker
- **Connectivity Technology:** Bluetooth 5.3
- **Maximum Output Power:** 200 Watts
- **Battery Life:** Approximately 6 Hours
- **Waterproof Rating:** IPX6
- **Dimensions:** 23.8cm (D) x 23.8cm (W) x 31.7cm (H)
- **Components Included:** Quick Start Guide, Microphone (if applicable)

WARRANTY AND SUPPORT

Compaq products are designed for reliability and performance. For warranty information and technical support, please refer to the warranty card included in your package or visit the official Compaq support website. Keep your purchase receipt as proof of purchase for warranty claims.

For further assistance, you may contact Compaq customer service through their official channels. Visit the [Compaq Brand Store on Amazon](#) for more product information.