

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

- › [Lenovo](#) /
- › [Lenovo Multi-Device Wireless Bluetooth Keyboard User Manual](#)

Lenovo ZG38C05810

Lenovo Multi-Device Wireless Bluetooth Keyboard

USER MANUAL

Model: ZG38C05810

Product Overview

The Lenovo Multi-Device Wireless Bluetooth Keyboard is engineered for maximum productivity and versatility. It allows you to effortlessly connect and switch between up to three different devices, such as laptops, tablets, and smartphones, running various operating systems including Android, iOS, and Windows.



Figure 1: Top-down view of the Lenovo Multi-Device Wireless Bluetooth Keyboard, showcasing its compact and sleek design.

Key features include a slim profile, lightweight design for portability, and a comfortable typing experience with 1.3mm low travel distance keys and 12 customizable shortcut keys. The keyboard is powered by a rechargeable battery, providing extended usage on a single charge.

Multi-Device Connectivity

Effortlessly connect and switch up to 3 devices



Figure 2: Illustration of the keyboard's multi-device connectivity, showing it connected to a laptop, tablet, and smartphone, highlighting compatibility with Android, Windows, and iPadOS.

Setup Guide

1. Charging the Keyboard

Before initial use, ensure the keyboard is fully charged. Connect the provided USB-C cable to the keyboard's charging port and the other end to a USB power source (e.g., computer USB port, wall adapter). The charging indicator light will show the charging status.


2. Powering On/Off

Locate the power switch on the keyboard. Slide the switch to the 'ON' position to power on the keyboard. Slide it to the 'OFF' position to power off and conserve battery.

3. Pairing with Devices (Bluetooth)

The keyboard supports connection to up to three devices via Bluetooth. Follow these steps to pair:

1. Turn on the keyboard.
2. Press and hold one of the device selection keys **01**, **02**, or **03** for 3-5 seconds until the corresponding indicator light blinks rapidly. This indicates the keyboard is in pairing mode.
3. On your device (laptop, tablet, smartphone), go to Bluetooth settings and enable Bluetooth.
4. Search for available devices. The keyboard will appear as "Lenovo Multi-Device Keyboard" or similar.
5. Select the keyboard from the list to complete the pairing process. The indicator light on the keyboard will stop blinking and remain solid for a few seconds, then turn off, indicating a successful connection.
6. Repeat these steps for up to two additional devices using the other device selection keys.

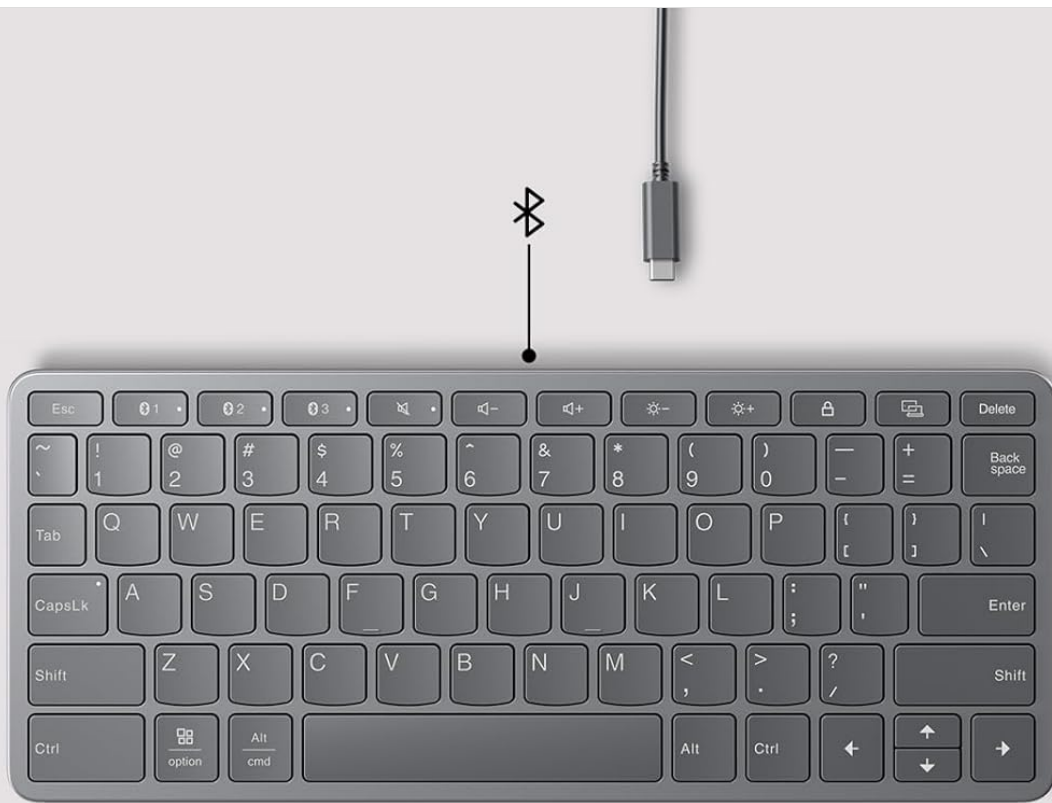

Flexible Connectivity

Bluetooth or USB-C connection



Enjoy up to 60 hours of continuous use on a single charge

Lenovo

Figure 3: Image illustrating the flexible connectivity options, including Bluetooth and USB-C, for the keyboard.

Operation

1. Switching Between Devices

Once paired with multiple devices, you can switch between them instantly by simply pressing the corresponding device selection key (**01**, **02**, or **03**). The keyboard will automatically connect to the selected device.

2. Using Shortcut Keys

The keyboard features 12 customizable shortcut keys (F1-F12 functions) that provide quick access to various system functions. These keys are typically activated by pressing the **Fn** key in combination with the desired function key. Refer to the diagram below for common functions.



Figure 4: Diagram illustrating the 12 function keys and their default assignments, including device switching, volume control, brightness, and lock screen.

3. Keyboard Shortcut Combinations

The keyboard supports various operating system-specific shortcut combinations to enhance your workflow. Some common examples are provided below:

⌘ + L	Lock screen	⌘ + A	Show or Hide taskbar
⌘ + D	Home screen	⌘ + ← or →	Snap the current app to the left or right
⌘ + S	Google search	⌘ + ↓ or ↑	Switch application window state
⌘ + N	Notification center	⌘ + M	Remove all floating windows
⌘ + I	Open settings	Alt + Tab	Recent apps
⌘ + E	Open file manager	Alt + Shift	Switch language
⌘ + W	Close current app	Ctrl + Shift	Switch input method
⌘ + Num Key	Open an app from taskbar	Ctrl + Space	Switch keyboard layout

Figure 5: Table detailing various keyboard shortcut combinations for common tasks like locking the screen, opening settings, and switching applications.

Maintenance

1. Cleaning the Keyboard

To maintain the keyboard's appearance and functionality, regularly clean it with a soft, lint-free cloth. For stubborn dirt, slightly dampen the cloth with water or a mild, non-abrasive cleaning solution. Avoid spraying liquids directly onto the keyboard or using harsh chemicals.

2. Battery Care

The keyboard features a built-in rechargeable battery. To maximize battery life:

- Avoid fully discharging the battery frequently.

- Store the keyboard in a cool, dry place when not in use for extended periods.
- Recharge the battery when the low battery indicator appears. The keyboard offers up to 60 hours of continuous use on a single charge.

Troubleshooting

If you encounter issues with your Lenovo Multi-Device Wireless Bluetooth Keyboard, refer to the following common problems and solutions:

Problem	Possible Solution
Keyboard does not power on.	Ensure the power switch is in the 'ON' position. Charge the keyboard using the USB-C cable.
Cannot pair with a device.	Ensure the keyboard is in pairing mode (indicator light blinking). Make sure Bluetooth is enabled on your device. Move the keyboard closer to the device. Try unpairing and re-pairing.
Keyboard disconnects frequently.	Ensure the keyboard is within the Bluetooth range of your device. Check for interference from other wireless devices. Ensure the keyboard battery is sufficiently charged.
Keys are unresponsive or typing incorrectly.	Recharge the keyboard. Restart the keyboard and your device. Ensure the correct operating system mode is selected if applicable (though this keyboard auto-detects).

Specifications

Feature	Detail
Brand	Lenovo
Model Name	Multi-Device Keyboard
Item Model Number	ZG38C05810
Connectivity Technology	Bluetooth
Compatible Devices	Laptop, Smart TV, Tablet, Smartphone
Product Dimensions (LxWxH)	10.1 x 4.2 x 0.22 inches (25.65 x 10.67 x 0.56 cm)
Item Weight	14.9 ounces (422.4 grams)
Special Features	Low-Profile Key, Quiet, Rechargeable
Number of Keys	75
Battery Life	Up to 60 hours continuous use
Power Source	Battery Powered (1 P76 battery included)

Warranty and Support

For detailed warranty information and technical support, please refer to the official Lenovo website or the

warranty card included with your product. You can also visit the Lenovo store on Amazon for additional resources and product information.

Official Lenovo Store: <https://www.amazon.com/stores/LENOVO/page/2C6395BA-C701-4025-9D7E-BAE1BD647EEE>

© 2025 Lenovo. All rights reserved.