

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

> [TECKNET](#) /

> [TECKNET Bluetooth Keyboard Rechargeable, 4-Device Free Switching \(2.4G+BT\), Ultra-Slim Full Size Wireless Keyboard, Quiet Typing, for PC/Laptop/Smart TV/Phone, Adjustable Stand, 12 Multimedia Keys Silver&Grey](#)

TECKNET TK-KB005

TECKNET Bluetooth Keyboard Instruction Manual

Model: TK-KB005

PRODUCT OVERVIEW

The TECKNET TK-KB005 Bluetooth Keyboard offers versatile connectivity and ergonomic design for enhanced productivity across multiple devices. It features a full-size layout with quiet scissor-switch keys, a rechargeable battery, and the ability to switch seamlessly between up to four devices.



Image: Front view of the TECKNET Bluetooth Keyboard in Silver&Grey, showcasing its full-size layout and slim design.

WHAT'S IN THE BOX

- 1 x Multi-device Tablet Keyboard (TECKNET TK-KB005)
- 1 x User Manual
- 1 x USB-C Charging Cable
- 1 x 2.4G USB Receiver (stored in the keyboard's back compartment)

1. Initial Charging

Before first use, ensure the keyboard is fully charged. Connect the provided USB-C cable to the charging port on the keyboard and to a USB power source. A red indicator light will show it's charging, turning green when fully charged.



Image: Close-up of the keyboard's side showing the USB-C charging port with a cable inserted. Text indicates "2h Charge" and "180 Days of Use".

Rechargeable Lithium Battery



Image: Diagram showing the 500mAh rechargeable lithium battery capacity and features like auto-sleep and power saving.

2. 2.4G Wireless Connection

1. Locate the 2.4G USB receiver stored in the back compartment of the keyboard.
2. Plug the USB receiver into an available USB-A port on your computer or device.
3. Turn on the keyboard using the ON/OFF switch located on the back.
4. Short press the 2.4G channel button (usually indicated by a wireless icon or '0' on the keyboard). The indicator light will flash.
5. The keyboard should automatically connect to your device. The indicator light will turn off after a successful connection.

Durable & Long-lasting Clicks

10,000,000



5,000,000



Image: Rear view of the keyboard showing the adjustable support buckles, power switch, USB-C charging port, and the slot for the 2.4G USB receiver.

Your browser does not support the video tag.

Video: Official TECKNET video demonstrating the 2.4G wireless connection process, including removing the USB receiver and plugging it into a device.

3. Bluetooth Connection (BT1, BT2, BT3)

The keyboard supports up to three Bluetooth connections, allowing you to switch between devices easily.

1. Turn on the keyboard using the ON/OFF switch.
2. Long press one of the Bluetooth channel buttons (BT1, BT2, or BT3) for more than 3 seconds until the corresponding indicator light flashes quickly. This puts the keyboard in pairing mode.
3. On your device (PC, laptop, tablet, smartphone, Smart TV), go to Bluetooth settings and search for new devices.
4. Select "TK-KB005" from the list of available devices to pair.
5. Once successfully paired, the indicator light on the keyboard will turn off.

4 Modes Connection

Connect 4 different devices simultaneously



Image: Diagram illustrating the keyboard's ability to connect to four different devices simultaneously (tablet, phone, laptop, desktop) via 2.4G and Bluetooth modes.

Your browser does not support the video tag.

Video: Official TECKNET video demonstrating the multi-device switching capability of the keyboard, highlighting seamless transitions between connected devices.

4. System Switching (FN + Q/W/E)

Due to differences in operating systems, key functions may vary. Use the following shortcuts to optimize keyboard compatibility:

- For Android devices: Press **Fn + Q**
- For Windows devices: Press **Fn + W**
- For iOS devices: Press **Fn + E**

Note: Generally, the system will automatically switch in Bluetooth mode. If some keys cannot be used, please use the above shortcut keys to switch systems.

1. Multimedia Keys

The keyboard features 12 multimedia keys (F1-F12) that enhance productivity. These keys provide quick access to functions like volume control, media playback, and more. Refer to the key labels for specific functions.

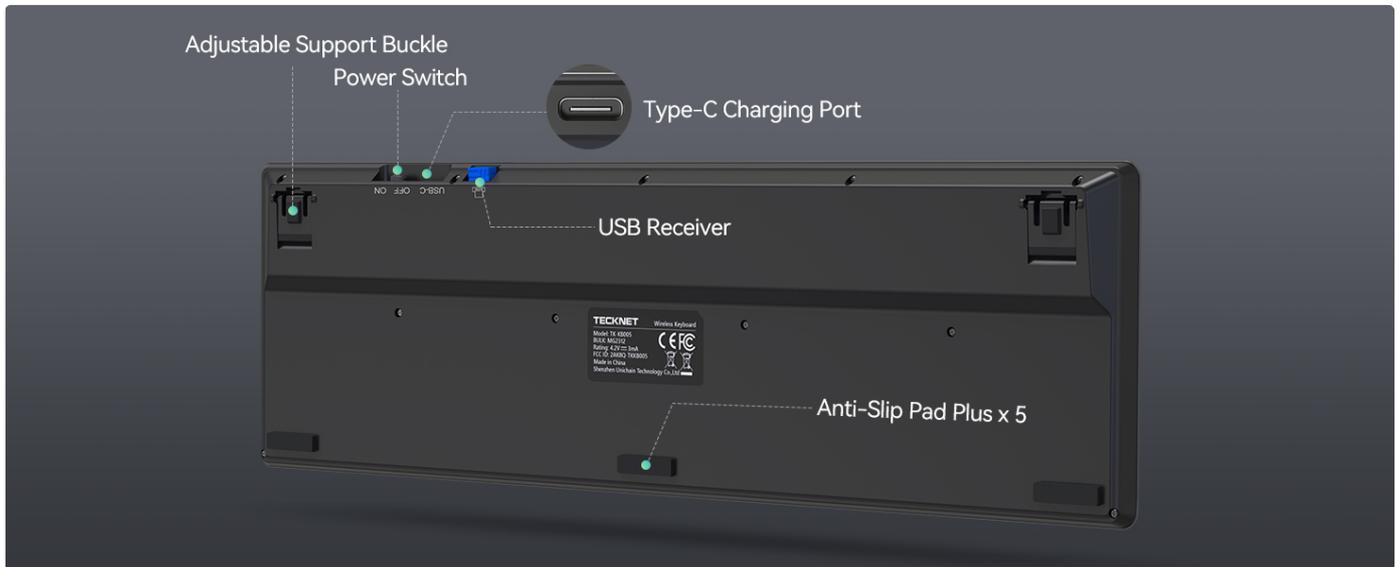


Image: Close-up of the keyboard highlighting the multimedia keys (F1-F12) and their functions.

2. Adjustable Stand

For optimal typing comfort, the keyboard includes adjustable support feet on the back. Flip these stands out to customize the tilt angle between 3° - 7° to suit your preference. Five extended non-slip pads ensure stability.

1. Please make sure your keyboard is fully charged. Charge the keyboard before use & ensure that it is used within a range of 49ft/15M.
2. Remove/delete all Bluetooth connection records on your device, turn off Bluetooth.
3. Turn on the device's Bluetooth again, reconnect the keyboard according to the user manual.

If the above method does not work, please try the following forced pairing method:

Bluetooth forced pairing method:

1. Please bring the keyboard close to the device, turn on the device's Bluetooth.
2. Short press the Bluetooth channel button corresponding to the device (the light will light up).
3. Long press the channel button for more than 3 seconds until the green LED light flashes quickly, complete the pairing of the device and the keyboard within 2 minutes.
4. The LED of the channel turns off after being on for 2 seconds, indicating that the device and the keyboard have been successfully paired.

2.4G forced pairing method:

1. Please bring the keyboard close to the device, short press the 2.4G channel button (the light will light up),
2. Long press for more than 3 seconds until the red LED flashes quickly.
3. Insert the USB Dongle within 20 seconds (make sure the keyboard is close to the receiver).
3. The LED of the 2.4G channel turns off after being on for 2 seconds, indicating that the device and the keyboard are paired successfully.

Note: If none of the above solutions work, please contact our service team for additional support.

Image: Side view of the keyboard showing the adjustable support stand extended, indicating ergonomic comfort.

3. Power Saving and Auto-Sleep

To conserve battery life, the keyboard automatically enters sleep mode after 30 minutes of inactivity. It wakes up instantly with any key press, ensuring no delays in your work.

MAINTENANCE

Keep the keyboard clean by wiping it with a soft, dry cloth. Avoid using harsh chemicals or abrasive materials. Ensure the USB-C charging port is free of dust and debris.

For optimal battery longevity, avoid fully discharging the keyboard frequently. Charge it when the low battery indicator (red LED4 flash) appears.

TROUBLESHOOTING

Problem	Solution
Keyboard not connecting/pairing.	<ol style="list-style-type: none">1. Ensure the keyboard is fully charged.2. Remove/delete all Bluetooth connection records on your device, then turn off Bluetooth. Turn it back on and reconnect.3. Bring the keyboard closer to the device (within 49ft/15M).4. Try the forced pairing method: Long press the Bluetooth channel button for >3 seconds until the LED flashes quickly, complete pairing within 2 minutes.5. For 2.4G, ensure the USB dongle is inserted correctly and try the forced pairing method: Short press 2.4G channel button, long press for >3 seconds until red LED flashes quickly, insert USB dongle within 20 seconds.
Keys not functioning correctly (e.g., swapped WIN/ALT).	<ol style="list-style-type: none">1. Ensure the correct operating system mode is selected (Fn+Q for Android, Fn+W for Windows, Fn+E for iOS).2. Restart your computer/device and reconnect the keyboard.
Keyboard signal interference.	<ol style="list-style-type: none">1. Try to stay away from metal obstacles or other strong radio signals.
Battery drains quickly.	<ol style="list-style-type: none">1. Ensure the keyboard is turned off when not in use to activate auto-sleep and power-saving features.2. Fully charge the keyboard as soon as the low battery indicator appears.

SPECIFICATIONS

Feature	Detail
Product Dimensions	17.13 x 5.12 x 0.57 inches
Item Weight	1.29 pounds
Model Number	TK-KB005
Batteries	1 Lithium Ion battery required (included)
Connectivity Technology	Bluetooth, 2.4G USB-A

Feature	Detail
Number of Keys	110
Special Features	12 Multimedia Keys, Ergonomic, 90% Noise Reduction, Low-Profile Key, Rechargeable
Compatible Devices	Laptop, Smart TV, PC, Tablet, iPad, Smartphone

WARRANTY AND SUPPORT

TECKNET offers up to 3 years of support for this product (registration may be required). If you encounter any problems when using the keyboard, please contact TECKNET's professional customer service team for assistance. Contact information can typically be found on the TECKNET official website or through your purchase platform.