

[Manuals.plus](#) /

> [STUDIOFINIX](#) /

> STUDIOFINIX 8 Inch Outdoor Rock Speakers Bluetooth Instruction Manual

STUDIOFINIX ST-RSGPBTX2-US

STUDIOFINIX 8 Inch Outdoor Rock Speakers Bluetooth Instruction Manual

Model: ST-RSGPBTX2-US

For optimal performance and longevity, please read this manual thoroughly before use.

1. PRODUCT OVERVIEW

The STUDIOFINIX 8 Inch Outdoor Rock Speakers are designed to provide high-quality audio in outdoor environments. Featuring Bluetooth 5.3 connectivity, these speakers offer a robust wireless connection and are built to withstand various weather conditions with IPX6 waterproofing. This manual provides essential information for setting up, operating, and maintaining your speakers.

ROCK SPEAKERS BLUETOOTH PLUS

Available in three sizes for you to choose from. The rock speakers bluetooth plus features one

-  Multiple Sizes
-  5.3 Bluetooth
-  IPX7 Waterproof



Our Speakers Can Support up to 8 Pairs of Speakers for Connection

Figure 1: Overview of the STUDIOFINIX 8 Inch Outdoor Rock Speaker and its specifications.

2. WHAT'S INCLUDED

Verify that all components are present in the package:

- Main Speaker (x2)
- Sub Speaker (x2)
- 5M Waterproof Speaker Connection Cable (x2)
- Instruction Manual (x1)



Figure 2: Package contents for the STUDIOFINIX 8 Inch Outdoor Rock Speakers.

3. SPECIFICATIONS

Model Number	ST-RSGPBTX2-US
Speaker Size	8 Inches
Connectivity Technology	Bluetooth 5.3, Wired
Waterproof Rating	IPX6
Maximum Output Power	600 Watts (Pair)
Frequency Response	60Hz - 10KHz
Bluetooth Range	Up to 65 feet (20 meters) unobstructed
Impedance	4 Ohms
Dimensions (D x W x H)	13.7" x 11.6" x 11.4" (34.8cm x 29.5cm x 29cm)
Weight	21.8 Kilograms (Pair)

Note: The product description specifies IPX6 waterproofing.

Heavy Duty Materials Rock Speakers with Hidden Waterproof Wires

Seamlessly blends in natural environments



Figure 3: Detailed dimensions and technical specifications of the speaker.

4. SETUP AND CONNECTION

Follow these steps to set up your STUDIOFINIX Outdoor Rock Speakers:

- 1. Connect Main and Secondary Speakers:** Connect the main speaker to the secondary speaker using the provided waterproof speaker connection cable. Ensure connections are secure.
- 2. Power On:** Power on both the main and secondary speakers.
- 3. Pair via TWS (True Wireless Stereo):** If using multiple speakers, pair the two main speakers via TWS. Refer to the "Operating Multi-Speaker Modes" section for detailed instructions.
- 4. Bluetooth Connection:** Enable Bluetooth on your smart device (smartphone, tablet, laptop). Search for "STUDIOFINIX" or a similar device name in the Bluetooth settings and select it to connect.

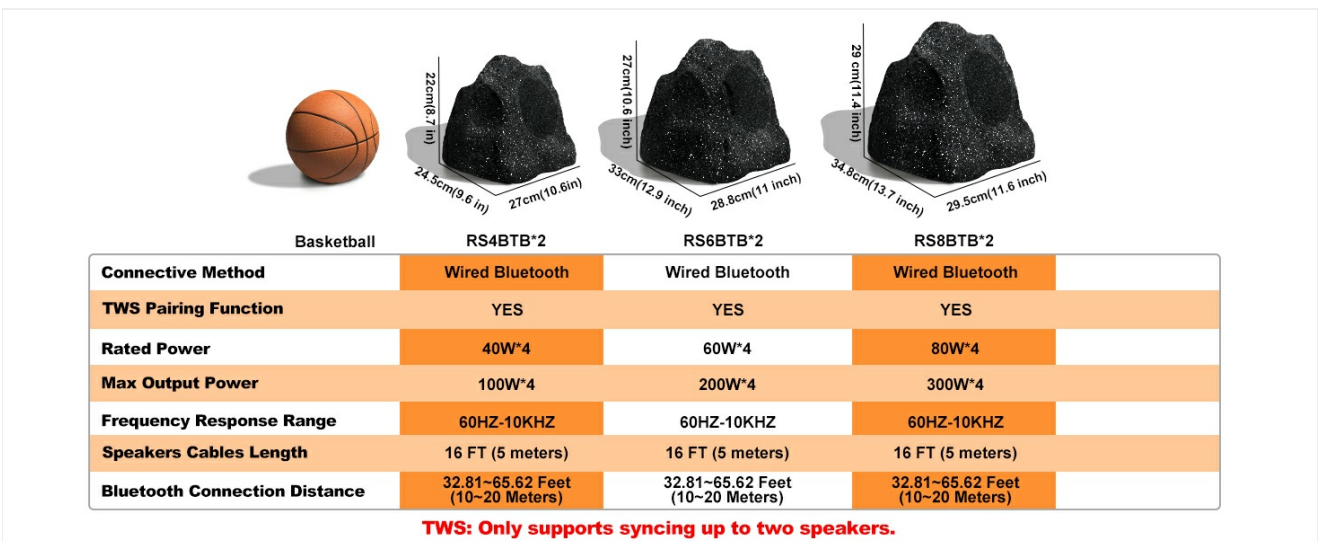


Figure 4: Step-by-step guide for connecting your speakers.

Multi-Speaker Connect Button

Quick Press to Enable / Press and Hold to Disable Multi Speaker Connect Mode

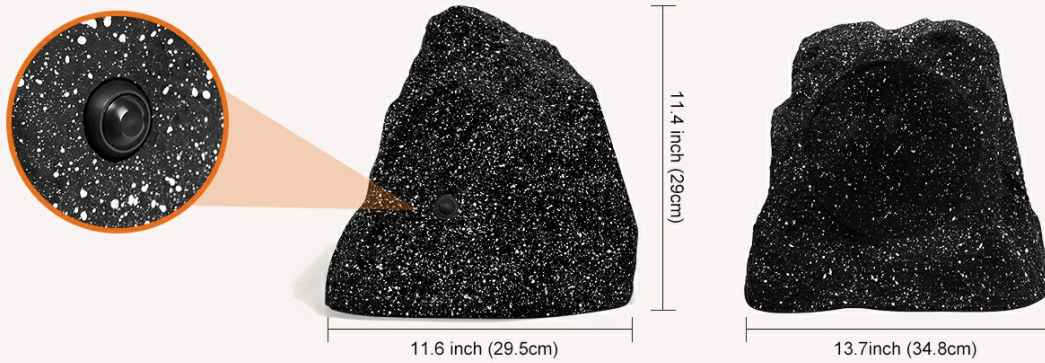


Figure 5: Example of hidden waterproof wire installation.

5. OPERATING MULTI-SPEAKER MODES

The STUDIOFINIX speakers support flexible multi-speaker configurations:

- **Designate Master Speaker:** On the speaker you wish to be the master, press and hold the pairing button. This speaker will then control the audio for other connected speakers.
- **Connect Slave Speakers:** For additional speakers, short press the pairing button on each to connect them as slave units to the master speaker. The system supports up to 20 wired rock speakers.
- **Independent Mode:** A slave speaker can be switched to independent mode by pressing and holding its pairing button. This allows for greater flexibility in various usage scenarios.

What's in the box?



Figure 6: Multi-Speaker Connect Button functionality.

6. MAINTENANCE

The STUDIOFINIX Outdoor Rock Speakers are designed for durability and weather resistance. To ensure their longevity:

- **Cleaning:** Periodically wipe down the speakers with a damp cloth to remove dirt and debris. Avoid using harsh chemicals or abrasive cleaners.
- **Cable Inspection:** Regularly inspect all outdoor-rated cables for any signs of wear, damage, or exposure.

Replace damaged cables immediately to maintain waterproofing and performance.

- **Environmental Considerations:** While waterproof, extreme weather conditions (e.g., prolonged submersion, severe hailstorms) should be avoided if possible to maximize product lifespan.

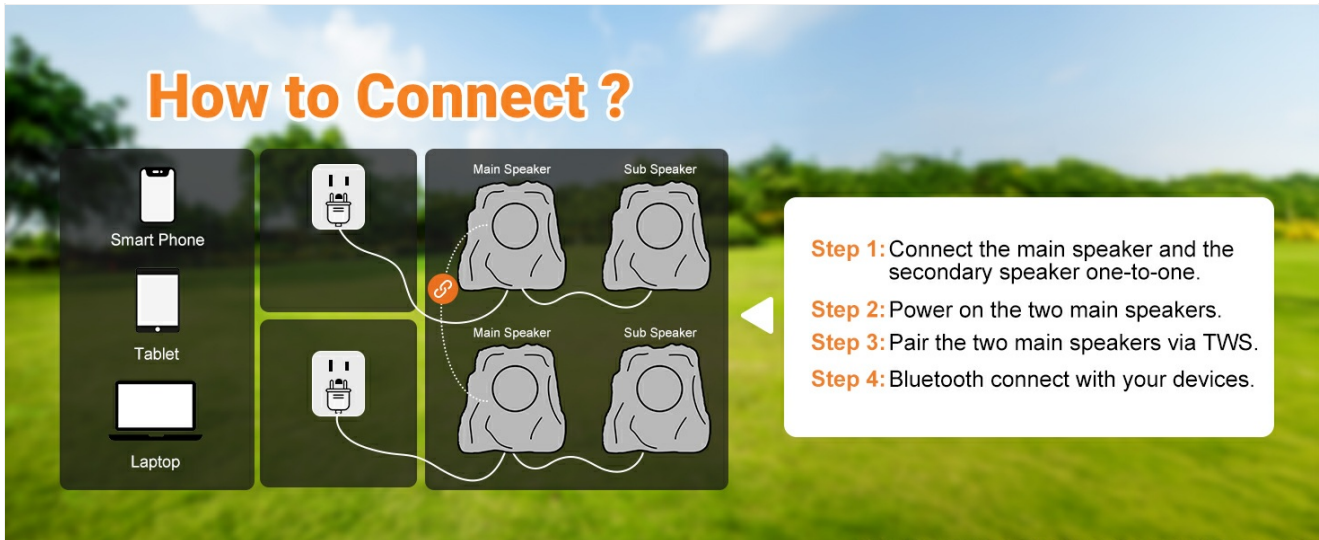


Figure 7: The speakers are designed to be dust-resistant and waterproof.

7. TROUBLESHOOTING

If you encounter issues with your speakers, refer to the following common troubleshooting steps:

- **No Power:**

- Ensure the power cable is securely connected to both the speaker and a working power outlet.
- Check if the power outlet is functional by plugging in another device.

- **No Sound:**

- Verify that the speakers are powered on and properly connected via Bluetooth or wired connection.
- Increase the volume on both your connected device and the speakers.
- Ensure the correct audio output is selected on your source device.
- If using multi-speaker mode, confirm the master and slave speakers are correctly paired.

- **Bluetooth Disconnection/Poor Range:**

- Ensure your device is within the 65-foot (20-meter) unobstructed Bluetooth range.
- Minimize obstacles between your device and the speakers (e.g., walls, large metal objects).
- Try disconnecting and re-pairing the Bluetooth connection.
- Ensure no other devices are interfering with the Bluetooth signal.

- **Multi-Speaker Pairing Issues:**

- Ensure only one speaker is designated as the master by holding its pairing button.
- Short press the pairing button on other speakers to connect them as slaves.
- If issues persist, power cycle all speakers and attempt pairing again.

8. WARRANTY INFORMATION

STUDIOFINIX provides a **1-Year Limited Warranty** for this product. This warranty covers manufacturing defects

and workmanship under normal use. It does not cover damage caused by misuse, accidents, unauthorized modifications, or natural disasters. Please retain your proof of purchase for warranty claims.

9. CUSTOMER SUPPORT

For further assistance, technical support, or warranty inquiries, please contact STUDIOFINIX customer service. Refer to the contact information provided on the product packaging or the official STUDIOFINIX website.

Website: www.studiofinix.com *(Note: This is a placeholder URL, please refer to actual product documentation for correct website.)*