

[Manuals.plus](#) /

› [STUDIOFINIX](#) /

› STUDIOFINIX 8 Inch Rock Speakers Outdoor Waterproof - Instruction Manual

STUDIOFINIX ST-RS8PGBT-SLR

STUDIOFINIX 8 Inch Rock Speakers Outdoor Waterproof - Instruction Manual

Model: ST-RS8PGBT-SLR

INTRODUCTION


Thank you for choosing the STUDIOFINIX 8 Inch Rock Speakers. These outdoor speakers are designed to provide high-quality audio in various outdoor environments, featuring solar charging, Bluetooth 5.3 connectivity, and a durable, weather-resistant design. Please read this manual carefully before use to ensure proper operation and longevity of your speakers.

PACKAGE CONTENTS


Verify that all items listed below are included in your package:

- Rock Speaker x 2
- Type-C charging port with 30W A+C fast charging x 2
- 1-meter fast charging cable x 2
- User manual x 2

What's in it

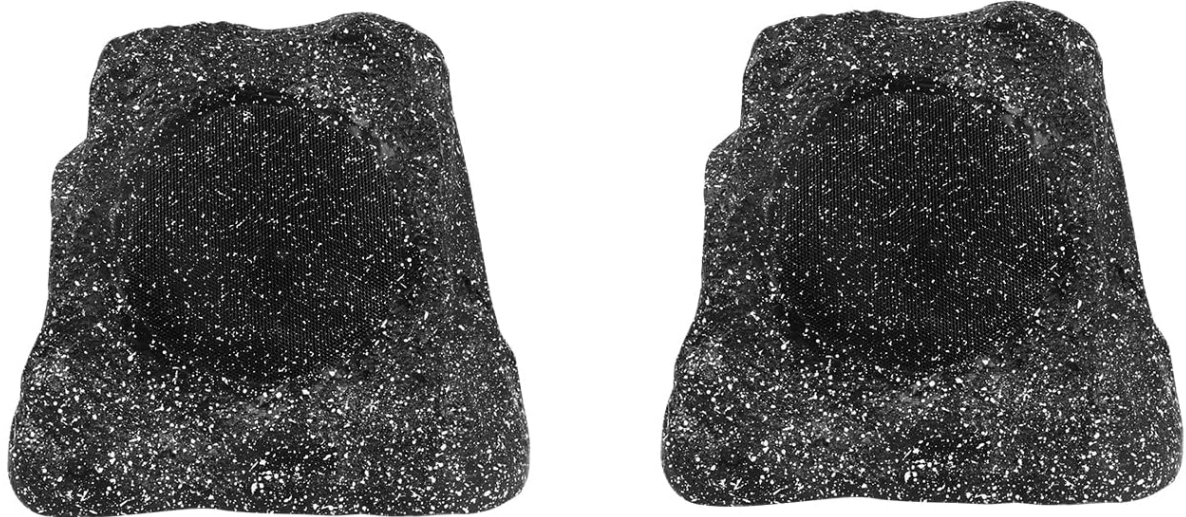

Speaker x 2

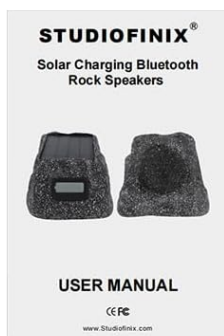

User Manual x2

USB A+C Power Adaptor x2
C-C Charging Cables x2

Image: The package includes two rock speakers, two Type-C charging ports with 30W A+C fast charging, two 1-meter fast charging cables, and two user manuals.

PRODUCT FEATURES

- **Solar-Powered & Dual Charging:** Speakers can be charged via solar power or the included Type-C power cord. A 4-hour charge via power cord provides up to 8 hours of playtime at full power or 10 hours at 80% volume. Solar and power cord charging can operate simultaneously.
- **IPX7 Waterproof & Weather-Resistant:** Designed for outdoor durability, these speakers are IPX7 waterproof, capable of withstanding rain and various weather conditions.
- **Bluetooth 5.3 and True Wireless Stereo (TWS):** Advanced Bluetooth 5.3 ensures a stable connection up to 33 feet between two speakers and between your device and a speaker. TWS allows pairing two speakers for a richer, stereo audio experience.
- **Realistic Rock-Look Design:** Crafted from fiberglass resin, the speakers blend seamlessly into garden, patio, deck, or lawn environments.

- **High Power Output:** Each unit delivers a maximum peak of 120W (rated power 40W).

Outdoor Rock Bluetooth Speakers

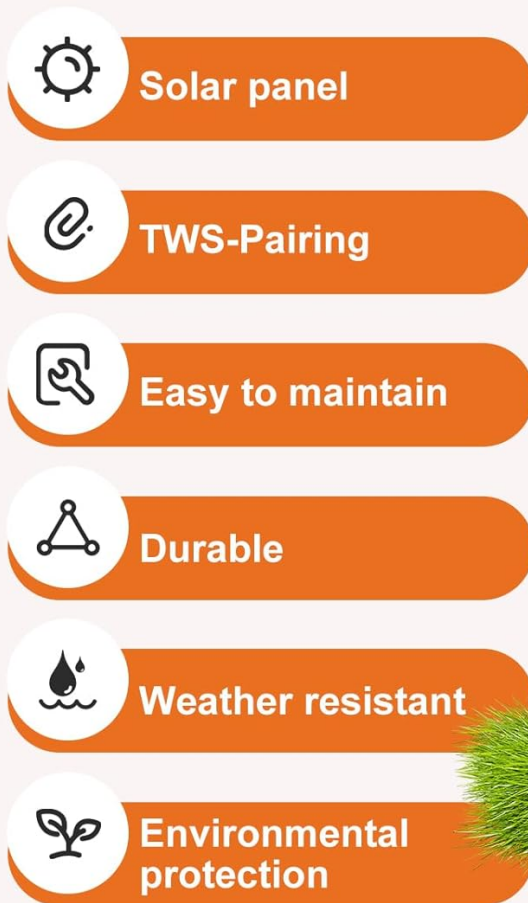


Image: This diagram highlights key features including solar panel, TWS-pairing, easy maintenance, durability, weather resistance, and environmental protection.

SETUP

1. Charging the Speakers

Before initial use, fully charge your speakers using the provided Type-C charging cables. For optimal performance, ensure the solar panel is exposed to direct sunlight.

- **Solar Charging:** Place the speakers in direct sunlight. Solar charging can take approximately 35 hours for a full charge, depending on sunlight intensity.
- **USB-C Charging:** Connect the included Type-C charging cable to the charging port on the speaker and a compatible power adapter. A full charge takes approximately 4 hours.

Charging in the SUN During the DAY

10 Hours

(At 80% Volume)

USB

Charging with
included micro-USB
cable



Image: The speaker can be charged via its solar panel during the day or via the USB-C port with the included cable.



Image: This diagram shows that solar charging takes approximately 35 hours, while USB-C charging takes 4 hours.

2. Powering On/Off

Locate the control panel on the speaker. Press and hold the power button **U** for a few seconds to turn the speaker on or off. An indicator light will confirm the power status.

Your browser does not support the video tag.

Video: This video demonstrates the location and function of the USB-C port, solar panel, power switch, multi-speaker connect button, and Bluetooth switching button on the STUDIOFINIX rock speaker.

3. Bluetooth Pairing

The speakers support both single device pairing and True Wireless Stereo (TWS) pairing for two speakers.

Single Speaker Pairing:

1. Ensure the speaker is powered on and in Bluetooth pairing mode (blue indicator light blinking).
2. On your smartphone, tablet, or laptop, search for Bluetooth devices and select "RS8".
3. Once connected, a confirmation tone will sound, and the indicator light will turn solid blue.

True Wireless Stereo (TWS) Pairing (for two speakers):

1. Ensure both speakers are powered on.
2. Long-press the TWS button (often indicated by a chain link icon) on either speaker for 3 seconds to initiate automatic pairing.
3. A "ding-dong" tone will be emitted upon successful pairing. The primary speaker will show a steady yellow TWS light, and the secondary speaker will show a steady green TWS light.
4. On your phone, search for the Bluetooth device named "RS8" and select it. A "connected" tone confirms successful pairing.
5. Both speakers will now play synchronously, delivering full stereo sound.



Image: This diagram illustrates the TWS pairing process, showing how two speakers connect to each other and then to a mobile device for stereo sound.



Image: A visual guide detailing the steps to power on speakers, perform TWS pairing, and connect to a Bluetooth device.

OPERATING THE SPEAKERS

1. Music Playback

Once connected via Bluetooth, you can control music playback (play, pause, skip tracks) directly from your connected device. The speakers do not have dedicated playback control buttons.

2. Volume Control

Adjust the volume directly from your connected Bluetooth device (smartphone, tablet, etc.).

3. Optimal Placement

For the best audio experience and solar charging efficiency, place the speakers in an area with clear line-of-sight to your Bluetooth device and ample direct sunlight. The realistic rock design allows them to blend naturally into garden, patio, deck, or pool areas.



Garden



Pool



BBQ



Patio

Image: The rock speakers are shown integrated into different outdoor environments, including gardens, pool areas, BBQ setups, and patios.



Image: A STUDIOFINIX rock speaker is shown positioned next to a swimming pool on a patio, demonstrating its outdoor use.

Your browser does not support the video tag.

Video: This video showcases the STUDIOFINIX 8 Inch Solar Outdoor Rock Speakers in an outdoor setting, highlighting their design and placement flexibility.

MAINTENANCE

1. Waterproofing Care

The speakers are IPX7 waterproof. However, to prevent water from entering the control panel, **do not open the cover on rainy days**. Ensure the Type-C charging port cover is securely closed when not charging.

IPX7 Design Waterproof

Weatherproof music anywhere, anytime!



CAUTION: Do not open the cover on rainy days to prevent water from getting in.

Image: A rock speaker is shown in the rain, emphasizing its IPX7 waterproof design. A caution advises not to open the USB-C cover during rainy conditions.

2. Cleaning

Wipe the speakers with a soft, damp cloth. Avoid using harsh chemicals or abrasive cleaners that could damage the finish or solar panel.

3. Adhesive Residue Note

Minor adhesive residue may be present on the base of the Rock Speaker. This is an intentional part of the waterproof sealing process to ensure IPX7-rated protection and is not a defect.

4. Winter Storage

While designed for outdoor use, prolonged exposure to extreme winter conditions may affect battery life and performance. For best longevity, consider storing the speakers indoors during harsh winter months.

TROUBLESHOOTING

- **No Power:** Ensure the speakers are charged. Connect to a power source via USB-C and check the charging indicator.
- **Cannot Pair Bluetooth:** Ensure the speaker is in pairing mode (blinking blue light). Turn off and on your device's Bluetooth. Move closer to the speaker. If using TWS, ensure both speakers are paired to each other first, then connect your device to the primary speaker.
- **No Sound/Low Volume:** Check the volume level on both your connected device and the speaker. Ensure the speakers are properly paired.
- **TWS Connection Drops:** Ensure speakers are within 33 feet of each other. Obstructions can affect signal.
- **Water Inside Speaker (despite IPX7):** While IPX7 rated, ensure the charging port cover is always sealed when not in use, especially during rain. Avoid submerging the speakers. If water ingress occurs, power off immediately and allow to dry completely before attempting to use again.
- **One Speaker Not Working in TWS:** Re-attempt TWS pairing. Ensure both speakers are charged.

SPECIFICATIONS

Feature	Specification
Brand	STUDIOFINIX
Model Name	ST-RS8PGBT-SLR
Speaker Type	Outdoor
Connectivity Technology	Bluetooth 5.3
Audio Output Mode	Stereo
Speaker Maximum Output Power	120 Watts (Peak per unit)
Rated Power	40 Watts (per unit)
Frequency Response	60Hz-10KHz
Impedance	4 Ohms
Audio Driver Size	8 Inches
Bluetooth Range (Device to Speaker)	Up to 45 Feet (unobstructed) / 33 Feet (obstructed)
TWS Pairing Range (Speaker to Speaker)	Up to 33 Feet
Water Resistance Level	IPX7 Waterproof
Power Source	Battery Powered (Solar & USB-C)
Battery Average Life	8-10 Hours (depending on volume)
Battery Charge Time (USB-C)	4 Hours
Battery Charge Time (Solar)	Approx. 35 Hours
Enclosure Material	Fiberglass Resin
Item Dimensions (D x W x H)	13.46"D x 11.41"W x 11.61"H
Item Weight	12.07 Kilograms (per pair)
Control Method	Touch
Compatible Devices	Laptop, Smartphone, Tablet



Image: A detailed table outlining the product specifications for various sizes of STUDIOFINIX wireless Bluetooth rock speakers, including connectivity, TWS pairing, Bluetooth range, rated power, max output power, and frequency response.

WARRANTY AND SUPPORT

Warranty Information

This product comes with a **1-Year Limited Warranty**. This warranty covers manufacturing defects and workmanship under normal use. It does not cover damage caused by misuse, accidents, unauthorized modifications, or extreme environmental conditions beyond the product's specifications.

Customer Support

For technical assistance, warranty claims, or any questions regarding your STUDIOFINIX Rock Speakers, please refer to the contact information provided with your purchase or visit the official STUDIOFINIX website.