

[Manuals.plus](#) /

> [Hiveloood](#) /

> Hiveloood 71-Inch LED TV Stand with Power Outlet User Manual

Hiveloood 71" LED TV Stand with Power Outlet,60,00

Hiveloood 71-Inch LED TV Stand with Power Outlet User Manual

Model: 71" LED TV Stand with Power Outlet,60,00

1. INTRODUCTION

This manual provides detailed instructions for the assembly, operation, and maintenance of your Hiveloood 71-inch LED TV Stand. Please read this manual thoroughly before assembly and use to ensure proper function and safety.



Image 1.1: Fully assembled Hlivelood 71-inch LED TV Stand with LED lights illuminated.

2. SAFETY INFORMATION

Adherence to these safety guidelines is crucial for preventing injury and damage to the product.

- Always unplug the power cord before assembly, disassembly, or cleaning.
- Wear appropriate safety gear, such as gloves, when handling sharp objects or during assembly.
- Do not overload the shelves. Refer to the specifications for weight limits.
- Keep the power outlets and USB ports dry and away from heat sources to prevent electrical hazards.
- Always follow the assembly instructions provided in this manual.
- Ensure the TV stand is placed on a stable, level surface to prevent tipping.

3. PRODUCT SPECIFICATIONS

Feature	Detail
Material	Wood

Number of Shelves	3 (including 2 adjustable glass shelves)
Item Weight	93 pounds
Product Dimensions (L x W x H)	70.86 x 13.8 x 26.26 inches
Accommodates TV Sizes	60-inch, 70-inch, and 80-inch TVs
Power Outlet	2 AC outlets, 3 USB ports, 6.5-foot power cord
LED Lights	2 layers RGB LED, 60+ colors, dynamic/timing modes, music sync, remote/app control

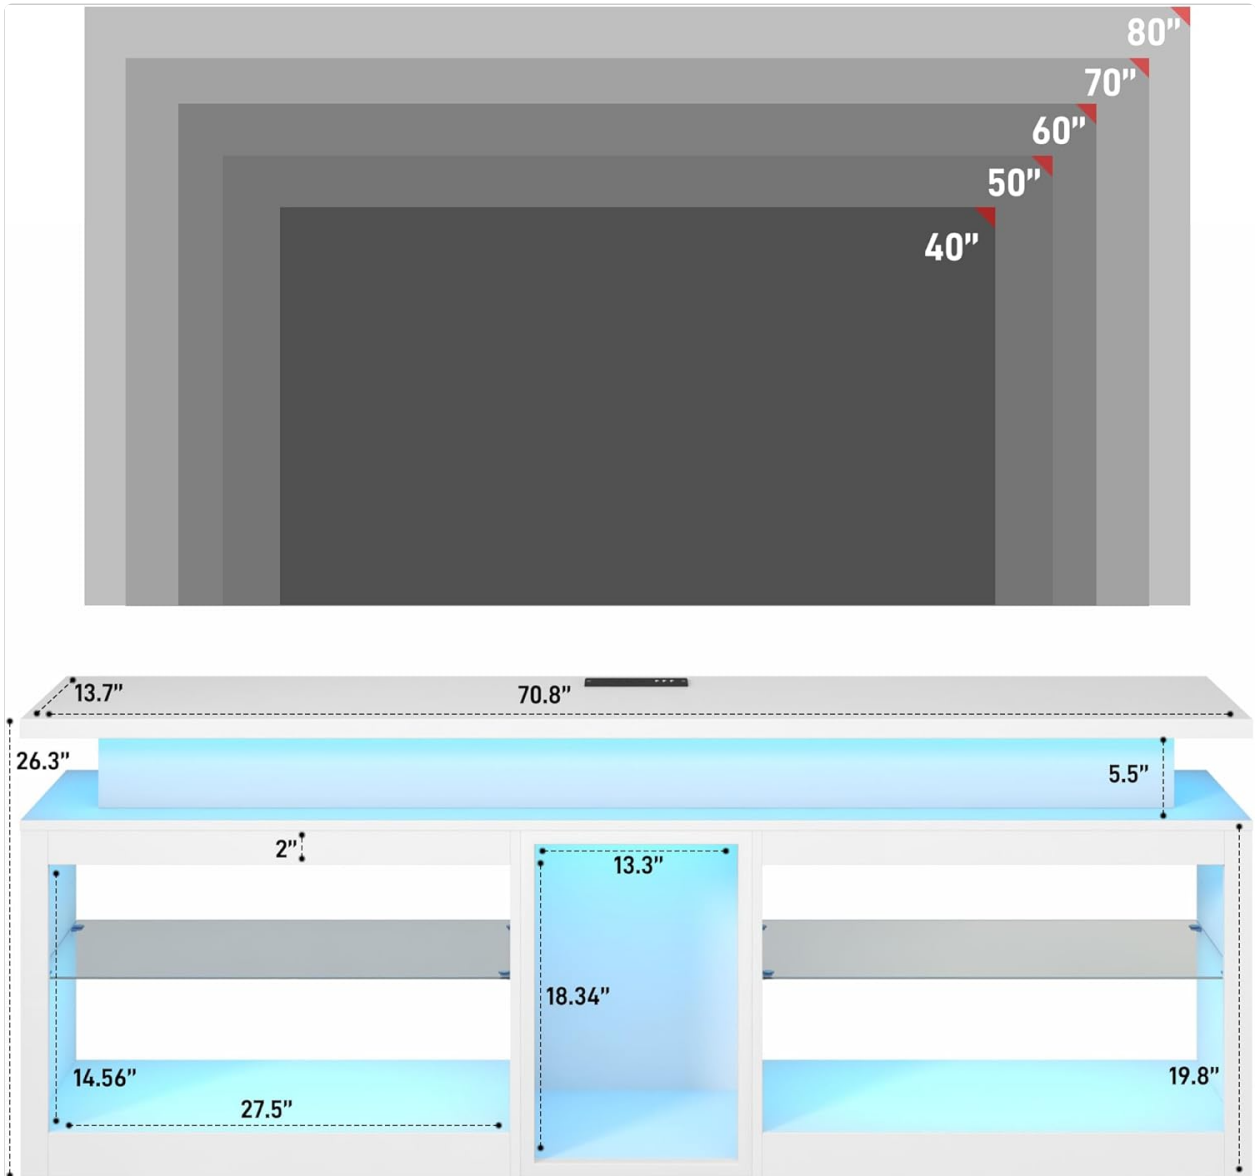


Image 3.1: Detailed dimensions of the TV stand.

4. ASSEMBLY INSTRUCTIONS

Follow these steps carefully for proper assembly. An assembly video is provided for visual guidance.

[Assembly Video Guide](#)

Your browser does not support the video tag.

Video 4.1: Full assembly guide for the 71-inch LED TV Stand.

1. Step 1: Prepare LED Strips and Cam Lock Bolts (0:08 - 1:28 in video)

Unroll the LED strips and attach them to the designated grooves on Board 1 (top board) using the provided screws and clips. Install cam lock bolts (Part A) into Boards 1, 2, and 7 as indicated in the instructions.

2. Step 2: Assemble Base Structure (1:28 - 2:33 in video)

Attach the side panels (Parts 4 and 6) to the bottom panel (Part 7) using cam locks (Parts B and N). Then, attach the middle panel (Part 5) to the bottom panel (Part 7) using screws (Part D).

3. Step 3: Attach LED Strips to Middle Board (2:33 - 3:08 in video)

Secure the second set of LED strips to Board 2 (middle board) using screws (Part E) and clips (Part G).

4. Step 4: Connect Top Board to Base (3:08 - 3:41 in video)

Carefully align and attach the top board (Part 1) to the assembled base structure (Parts 2, 4, 5, 6, 7) using dowels (Part C). Secure with cam locks (Parts B and N).

5. Step 5: Prepare Shelf Supports (3:41 - 4:20 in video)

Install cam lock bolts (Part A) into the shelf support boards (Parts 16, 12, 13).

6. Step 6: Prepare Shelf Side Panels (4:20 - 5:25 in video)

Install cam lock bolts (Part A) into the shelf side panels (Parts 11 and 8). Insert dowels (Part C) into shelf side panels (Parts 18 and 19).

7. Step 7: Assemble Shelf Units (5:25 - 8:37 in video)

Attach shelf supports (Part 16) to side panels (Parts 18 and 19) using cam locks (Parts B and N). Repeat for other shelf units. Insert dowels (Part C) into the remaining shelf side panels (Parts 10 and 9). Attach shelf supports (Part 15) to side panels (Parts 10 and 9) using cam locks (Parts B and N).

8. Step 8: Install Back Panels (8:37 - 9:11 in video)

Slide the back panels (Part P) into the grooves of the main structure.

9. Step 9: Install Middle Shelf Support (9:11 - 9:40 in video)

Attach the middle shelf support (Part 20) to the side panels (Parts 10 and 9) using screws (Part M).

10. Step 10: Final Top Board Placement (9:40 - 10:13 in video)

Carefully place the top board (Part 1) onto the fully assembled structure and secure it using cam locks (Parts B and N).

11. Step 11: Insert Glass Shelves and Power Outlet (10:13 - 10:33 in video)

Insert the glass shelves (Part 14) into their designated slots and secure them with clips (Parts Q and R). Install the power outlet (Part K) into the cutout on the top surface and secure it with screws (Part L).

5. OPERATING INSTRUCTIONS

5.1. LED Lighting System

Your TV stand features 2 layers of RGB LED lights with over 60 vibrant colors and multiple dynamic modes. Control is available via a remote or a mobile application.

- **Power On/Off:** Use the designated button on the remote or app.
- **Color Selection:** Choose from over 60 colors using the color palette on the remote or app.
- **Dynamic Modes:** Select various pre-programmed lighting effects (e.g., fade, jump, strobe).

- **Timing Mode:** Set a timer for the lights to automatically turn off.
- **Music Sync:** Activate this feature to allow the lights to change rhythmically with music.



LED TV Stand Can Be Adjustable 60,000-Colors Lighting



Image 5.1: LED lighting features with remote and app control options.

5.2. Power Outlet Usage

The integrated power outlet provides convenient access for your electronic devices.

- **AC Outlets:** Two standard AC power sockets are available for devices like TVs, soundbars, or lamps.
- **USB Ports:** Three USB ports are provided for charging smartphones, tablets, gaming controllers, and other USB-powered devices.
- **Cable Management:** Utilize the cable management holes on the back panel to keep wires organized and out of sight.



Image 5.2: Close-up of the integrated power outlet with AC sockets and USB ports.

6. MAINTENANCE

Regular care will help maintain the appearance and longevity of your TV stand.

- **Cleaning:** Wipe surfaces with a soft, damp cloth. Avoid harsh chemicals or abrasive cleaners. The matte-finished surface is designed for dust and water resistance.
- **Dusting:** Regularly dust all surfaces, including shelves and LED strips, with a dry, soft cloth.
- **Power Outlet:** Ensure the power outlet area remains dry and free of debris.
- **LED Strips:** Handle LED strips gently. If a strip malfunctions, contact customer support for assistance.
- **Glass Shelves:** Clean glass shelves with a glass cleaner and a soft cloth.

7. TROUBLESHOOTING

If you encounter any issues, refer to the following common solutions:

- **LED Lights Not Working:**
 - a. Check if the power adapter is securely plugged into a working outlet.

- b. Ensure all connections between the LED strips and the controller are firm.
- c. Verify the remote control battery is functional or try controlling via the mobile app.

- **Power Outlets Not Functioning:**

- a. Confirm the main power cord of the TV stand is securely plugged into a live wall outlet.
- b. Test the wall outlet with another device to ensure it is working.
- c. Avoid overloading the power strip with too many high-power devices.

- **Stand Wobbles After Assembly:**

- a. Ensure all cam locks and screws are tightened securely.
- b. Verify that the stand is placed on a completely flat and level surface.
- c. Check that all panels are correctly aligned according to the assembly instructions.

8. CUSTOMER SUPPORT

For further assistance, missing parts, or warranty inquiries, please contact Hlivelood customer support. Refer to your purchase documentation for specific contact details.