

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [Artika](#) /

› [Artika CODA Modern LED Pendant Light Instruction Manual](#)

Artika PDT-CDA5C-C2BL

Artika CODA Modern LED Pendant Light Instruction Manual

Model: PDT-CDA5C-C2BL

INTRODUCTION

Thank you for choosing the Artika CODA Modern LED Pendant Light. This manual provides essential information for the safe installation, operation, and maintenance of your new lighting fixture. Please read these instructions thoroughly before beginning installation and retain them for future reference.



Image: The Artika CODA Modern LED Pendant Light.

SAFETY INFORMATION

- **WARNING:** Risk of electric shock. Disconnect power at the circuit breaker before installation or servicing.
- All electrical connections must be in accordance with local and National Electrical Code (NEC) standards. If you are unfamiliar with proper electrical wiring connections, consult a qualified electrician.
- Do not install this fixture in wet locations. For indoor use only.
- Ensure the fixture is securely mounted to a structural element of the ceiling.
- Do not attempt to modify the fixture. Any modifications may void the warranty and create a safety hazard.
- Handle the light fixture with care to avoid damage to the LED components.

WHAT'S IN THE Box

Carefully unpack your Artika CODA Pendant Light and ensure all components are present and undamaged. The package should contain:

- Artika CODA LED Pendant Light Fixture
- Mounting Hardware (screws, wire nuts, canopy, etc.)
- Instruction Manual (this document)



COLOUR TEMPERATURE SWITCH INTERRUPTEUR DE TEMPÉRATURE DE COULEUR INTERRUPTOR DE TEMPERATURA DE COLOR

Image: Key features of the Artika CODA Pendant Light.

SETUP AND INSTALLATION

This fixture is designed for semi-flush or ceiling mount installation. Professional installation is recommended if you are not comfortable with electrical wiring.

1. **Prepare for Installation:** Turn off power at the main circuit breaker. Clear the work area.
2. **Mounting Bracket Installation:** Secure the mounting bracket to the ceiling junction box using the provided screws. Ensure it is firmly attached.

3. **Wiring:** Connect the fixture's wires to the household electrical wires according to standard electrical codes (black to black, white to white, ground to ground). Use the provided wire nuts and ensure all connections are secure.
4. **Adjust Height:** The pendant light features adjustable height. Before securing the canopy, adjust the suspension cables to your desired length. The maximum adjustable height is approximately 209 cm (82.28 inches).
5. **Secure Fixture:** Carefully push the fixture's canopy up to the ceiling, aligning it with the mounting bracket. Secure it in place using the provided screws or fasteners.
6. **Restore Power:** Once the fixture is securely installed and all connections are checked, restore power at the circuit breaker.

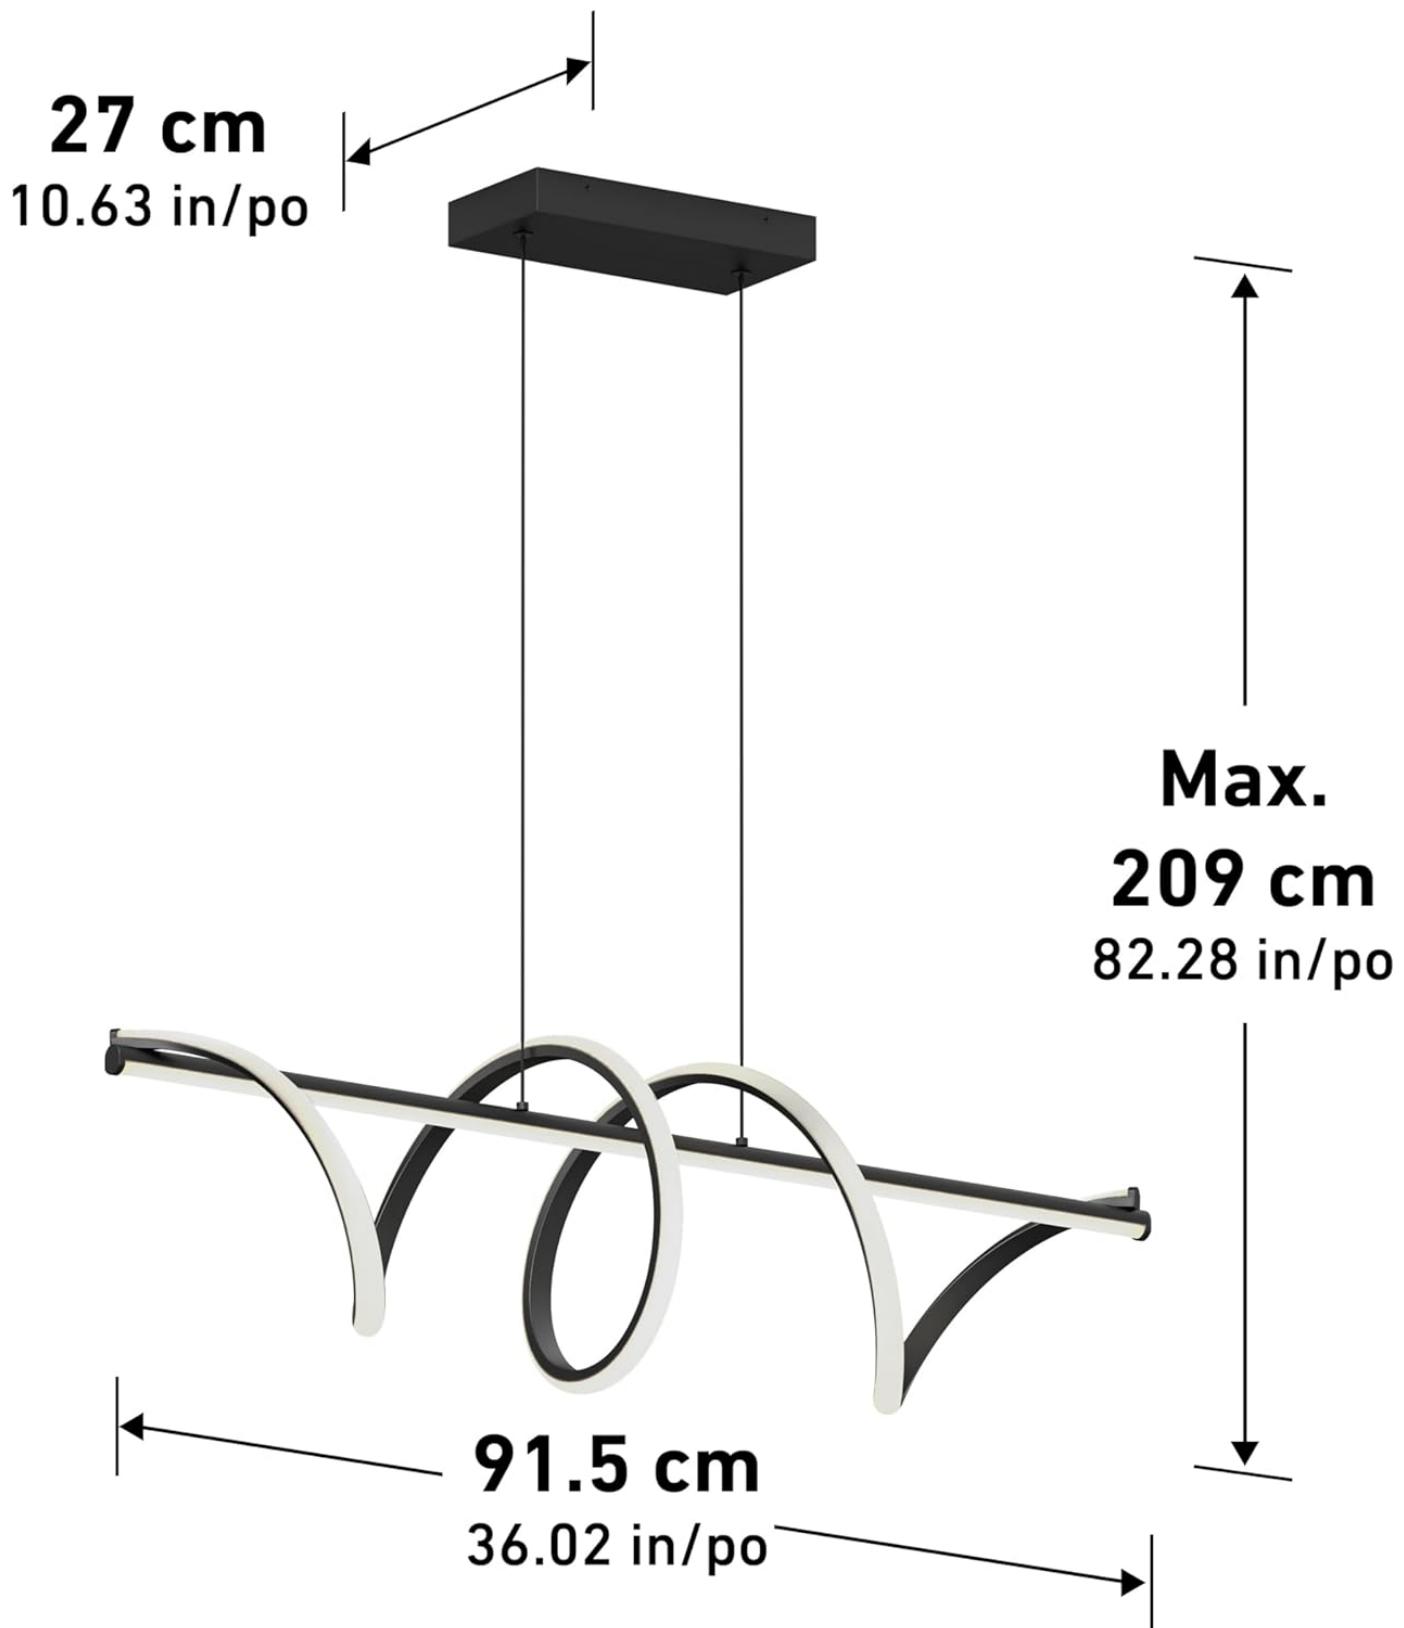


Image: Dimensions of the Artika CODA Pendant Light, illustrating adjustable height.



Image: The Artika CODA Pendant Light in a dining room setting.

OPERATING INSTRUCTIONS

The Artika CODA Pendant Light offers dimmable functionality and selectable color temperature (CCT) to customize your lighting experience.

- **Power On/Off:** Use your standard wall switch to turn the light fixture on or off.
- **Dimming:** This fixture is compatible with most standard LED dimmers. Connect it to a compatible dimmer switch (sold separately) to adjust the brightness from 0% to 100%.
- **Color Temperature Selection (CCT):** The fixture features a color temperature switch located on the ceiling canopy. Before final installation of the canopy, select your desired color temperature from the available 5 CCT options (e.g., 2700K, 3000K, 3500K, 4000K, 5000K). Once set, the fixture will retain this setting until manually changed.



Image: Location and settings of the color temperature switch.

Maintenance

To ensure the longevity and appearance of your Artika CODA Pendant Light, follow these simple maintenance guidelines:

- **Cleaning:** Turn off the power before cleaning. Use a soft, dry, or slightly damp cloth to wipe the fixture. Do not use abrasive cleaners, solvents, or polishes as they may damage the finish or LED components.
- **LED Care:** The integrated LED components are designed for a long lifespan (approximately 50,000 hours) and are not user-replaceable. Do not attempt to disassemble the LED module.
- **Inspection:** Periodically check all connections and mounting hardware to ensure they remain secure.

Troubleshooting

If you experience issues with your Artika CODA Pendant Light, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Light does not turn on.	<ul style="list-style-type: none"> Power is off at the circuit breaker. Loose wire connections. Faulty wall switch. 	<ul style="list-style-type: none"> Check the circuit breaker and ensure power is on. Verify all wire connections are secure (with power off). Test the wall switch with another device or replace it if faulty.
Light flickers or dims inconsistently.	<ul style="list-style-type: none"> Incompatible dimmer switch. Loose wire connections. 	<ul style="list-style-type: none"> Ensure you are using an LED-compatible dimmer switch. Check wire connections (with power off).
Incorrect color temperature.	<ul style="list-style-type: none"> CCT switch set incorrectly. 	<ul style="list-style-type: none"> Adjust the CCT switch on the canopy to the desired setting (power off before adjusting).

If these solutions do not resolve the issue, please contact Artika customer support.

SPECIFICATIONS

Model Number	PDT-CDA5C-C2BL
Brand	Artika
Color	Black
Material	Aluminum, Metal
Light Source Type	Integrated LED
Brightness	2000 Lumens (Max)
Color Temperature (CCT)	5 Selectable White Options (e.g., 2700K-5000K)
Dimmable	Yes (with compatible LED dimmer)
Lifespan	Approx. 50,000 hours
Voltage	120 Volts
Installation Type	Semi Flush Mount, Ceiling Mount
Adjustable Height	Yes (Max. 209 cm / 82.28 in)
Product Dimensions	10.63 x 80.71 x 36.02 inches (approx. 27 x 205 x 91.5 cm)
Item Weight	6.51 pounds
Indoor/Outdoor Usage	Indoor

WARRANTY

The Artika CODA Modern LED Pendant Light comes with a **Limited Warranty**. Please refer to the warranty card included with your product or visit the official Artika website for detailed terms and conditions regarding coverage, duration, and how to make a

claim. This warranty typically covers defects in materials and workmanship under normal use.

SUPPORT

For technical assistance, replacement parts, or any questions not covered in this manual, please contact Artika customer support:

- **Website:** Visit the official Artika website for FAQs, support resources, and contact information.[Artika Store on Amazon](#)
- **Phone/Email:** Refer to the contact details provided on the Artika website or your product packaging.

© 2026 Artika. All rights reserved. Information in this manual is subject to change without notice.