

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

Manuals.plus /

› [Bossdan](#) /

› Bossdan Handheld Cordless Vacuum H9 User Manual

Bossdan H9

Bossdan Handheld Cordless Vacuum H9 User Manual

Model: H9 | Brand: Bossdan

INTRODUCTION

This manual provides essential instructions for the safe and efficient operation, maintenance, and troubleshooting of your Bossdan Handheld Cordless Vacuum H9. Please read this manual thoroughly before first use and retain it for future reference.

SAFETY INFORMATION

Observe the following safety precautions to prevent injury or damage to the device:

- Do not use the vacuum cleaner to pick up water or other liquids.
- Do not vacuum burning or smoking materials such as cigarettes, matches, or hot ashes.
- Keep hair, loose clothing, fingers, and all parts of the body away from openings and moving parts.
- Do not use without the dust cup and filter in place.
- Store the vacuum in a dry, indoor location.
- Keep out of reach of children.
- Only use the provided USB-C charging cable. An adapter is not included.
- Power off the device before charging.
- Recharge monthly to maintain battery health, even if not in use.



Image: The Bossdan H9 vacuum cleaner features multiple safety protections including over-voltage, over-current, over-charge, over-temperature, short-circuit, and over-discharge protection for reliable performance.

PACKAGE CONTENTS

Verify that all items are present in the package:

- Bossdan Handheld Cordless Vacuum H9
- Flexible Hose
- Crevice Nozzle
- Brush Tool
- USB-C Charging Cable (adapter not included)
- Storage Bag
- User Manual (this document)



Image: The Bossdan H9 handheld vacuum and its included accessories, designed for various cleaning tasks.

MULTIFUNCTIONAL ACCESSORIES

Quick clean & no dead angles to meet your needs



Brush Tool

Used for sofas, beds, keyboard, etc



Crevice Tool

Used for Corner, Car Seat, sofas, etc



Flexible Hose

For hard to reach areas



Image: Detailed view of the multifunctional accessories: brush tool for surfaces like sofas and keyboards, crevice tool for corners and car seats, and a flexible hose for hard-to-reach areas.

PRODUCT OVERVIEW

Familiarize yourself with the components of your Bossdan H9 vacuum:

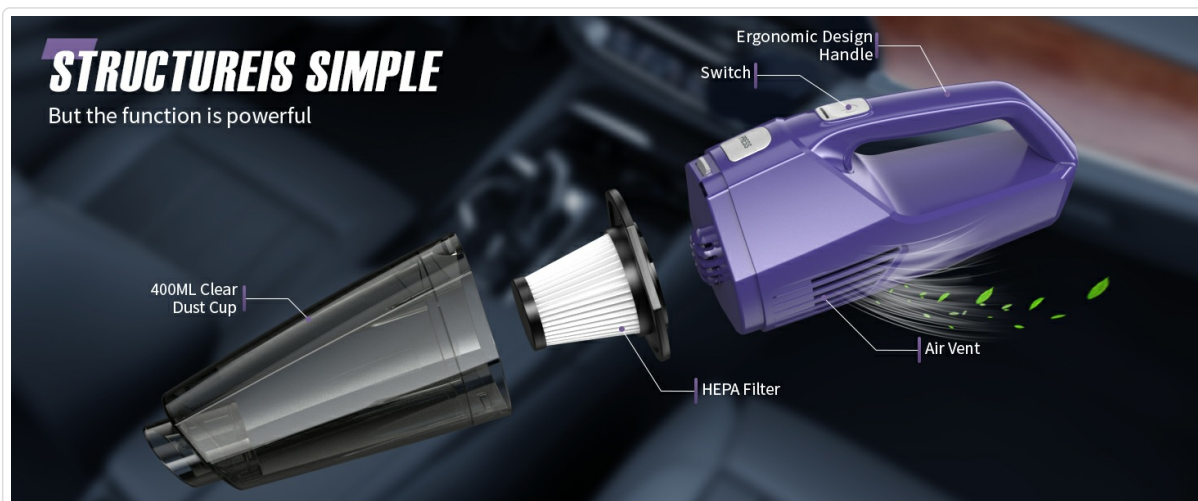


Image: An exploded diagram illustrating the main components of the Bossdan H9 vacuum, including the ergonomic handle, HEPA filter, dust cup, and air vent.

power switch, 400ml dust cup, HEPA filter, and air vent.

- **Ergonomic Design Handle:** For comfortable grip and ease of use.
- **Power Switch:** Controls the vacuum's operation.
- **Dust Cup (400ml):** Transparent container for collecting debris.
- **HEPA Filter:** High-efficiency particulate air filter for trapping fine dust.
- **Air Vent:** Exhausts filtered air.
- **Charging Port:** USB-C port for recharging the battery.
- **Battery Indicator Lights:** Provide status of battery charge.

SETUP

1. **Initial Charge:** The battery may lose charge during shipping. Fully charge the vacuum before its first use. Connect the USB-C charging cable to the vacuum's charging port and to a USB power source (adapter not included). The battery indicator will blink blue when low and show a solid blue light when fully charged. Charging typically takes 3 hours.
2. **Attach Accessories:** Select the appropriate accessory (crevice nozzle, brush tool, or flexible hose) for your cleaning task and firmly attach it to the vacuum's suction inlet. The flexible hose can be combined with the crevice nozzle for extended reach.



HIGH POWER MOTOR FOR EFFICIENT RUNTIME
Convenient USB Charging

Image: The Bossdan H9 vacuum being charged via its USB-C cable, illustrating its 25-minute runtime, 2000 mAh battery capacity, and 3-hour charging time.



Image: The Bossdan H9 vacuum demonstrating convenient USB charging, compatible with various power sources such as computers, power banks, car chargers, and power adapters (adapter not included).

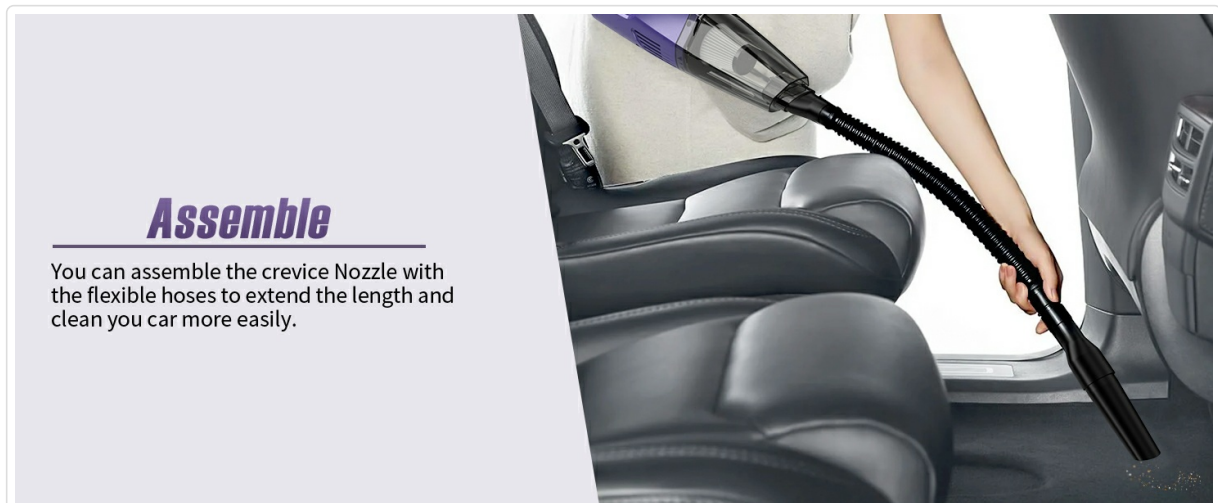


Image: Illustration of how to assemble the crevice nozzle with the flexible hose to extend reach for easier cleaning in tight spaces like car interiors.

OPERATING INSTRUCTIONS

- Power On/Off:** Press and hold the power button for 2 seconds to turn the vacuum on or off. This design prevents accidental activation.
- Vacuuming:** Guide the vacuum over the area to be cleaned. The 8KPa suction power is effective for picking up crumbs, pet hair, dust, and other small debris.
- Using Accessories:**
 - **Crevice Nozzle:** Ideal for narrow gaps, corners, car seats, and sofa crevices.
 - **Brush Tool:** Suitable for cleaning carpets, upholstery, keyboards, and pet hair on various surfaces.
 - **Flexible Hose:** Use with the crevice nozzle or brush tool to reach difficult areas under furniture or deep within car interiors.
- Battery Life:** The vacuum provides up to 25 minutes of runtime on a full charge. Monitor the battery indicator lights.

STRONG SUCTION

Pick up all the trash super fast: Dust, cat food, crumbs, pet hair, food residue etc.



Image: The Bossdan H9 vacuum in action, showcasing its 8000Pa strong suction power effectively collecting various debris like food residue, cat food, sand, and pet hair.



Image: The crevice nozzle attachment effectively cleaning debris from a sofa gap, demonstrating its utility for narrow spaces.

Brush Tool

The brush tool is perfect for cleaning the keyboard carpets car interior pet hair. The close brush makes the vacuum more attractive.



Image: The brush tool attachment cleaning a carpet, suitable for removing pet hair and dust from various fabric surfaces.

Flexible Hoses

Flexible hoses are perfect for sofas and bed bottoms, as well as car seats. It can clean hard-to-reach corners.



Image: The flexible hose attachment extending the reach of the vacuum to clean under a sofa, ideal for hard-to-reach areas.

MAINTENANCE

Regular maintenance ensures optimal performance and extends the lifespan of your vacuum.

1. Emptying the Dust Cup:

- Press the "PRESS" button to detach the dust cup from the main body.
- Empty the collected debris into a waste bin.

2. Cleaning the HEPA Filter:

- Remove the HEPA filter from the dust cup.
- Rinse the HEPA filter and dust cup under running water until clean.
- Allow the filter and dust cup to air dry completely before reassembling. Do not use the vacuum with a wet filter.

3. Battery Maintenance: Recharge the vacuum monthly to maintain battery health, even if it has not been used.



Image: A detailed view of the Bosssdan H9's dust cup and removable HEPA filter, illustrating the high-efficiency filtration system.



Image: A step-by-step guide demonstrating the cleaning and maintenance process for the Bosssdan H9 vacuum, including removing and emptying the dust cup, washing the filter, and air drying components.

TROUBLESHOOTING

Refer to this section for common issues and their solutions.

Problem	Possible Cause	Solution
Vacuum does not turn on.	Battery is depleted. Power button not held long enough.	Charge the vacuum fully. Press and hold the power button for 2 seconds.
Weak suction.	Dust cup is full. Filter is clogged. Battery is low.	Empty the dust cup. Clean and dry the HEPA filter. Recharge the vacuum.
Short operating time.	Battery not fully charged. Battery degradation over time.	Ensure the vacuum is fully charged before use. Ensure monthly recharging for battery health.
Charging indicator not working.	Charging cable or power source issue.	Check USB-C cable connection. Try a different USB power source.

SPECIFICATIONS

Feature	Detail
Model Name	H9
Brand	Bossdan
Suction Power	8000 Pa (8KPa)
Rated Power	120W
Dust Cup Capacity	400 ml
Battery Type	12V Lithium Battery (included)
Battery Capacity	2000 mAh
Battery Life (Runtime)	Up to 25 minutes
Charging Time	Approximately 3 hours
Charging Interface	USB-C
Filter Type	HEPA Filter (washable)
Noise Level	≤75 dB
Product Dimensions	14.52"L x 4.05"W x 3.66"H
Item Weight	1.68 lbs
Color	Iris Purple
Recommended Use	Car, Home, Office, RV

SPECIFICATIONS

Suction Power: 8000PA Dust Cup Capacity: 400ML
Product Weight: 1.4 LB Product Size: 14.5x3.9x4.2 IN
Noise: ≤75 DB Rated Power: 120W
Endurance Time: 25 MINS
Charging Time: 3 HOURS
Lithium Battery Capacity: 2000MAH



Image: A visual representation of the Bossdan H9 vacuum's key specifications, such as 8000Pa suction, 400ml dust cup, 1.4 lbs weight, ≤75dB noise, 25 mins runtime, 3 hours charging time, 120W rated power, and 2000mAh lithium battery.

LOW NOISE

Let you quietly complete the cleaning work.



Image: The Bossdan H9 vacuum operating at a low noise level (≤75dB), allowing for quiet cleaning without disturbing others.

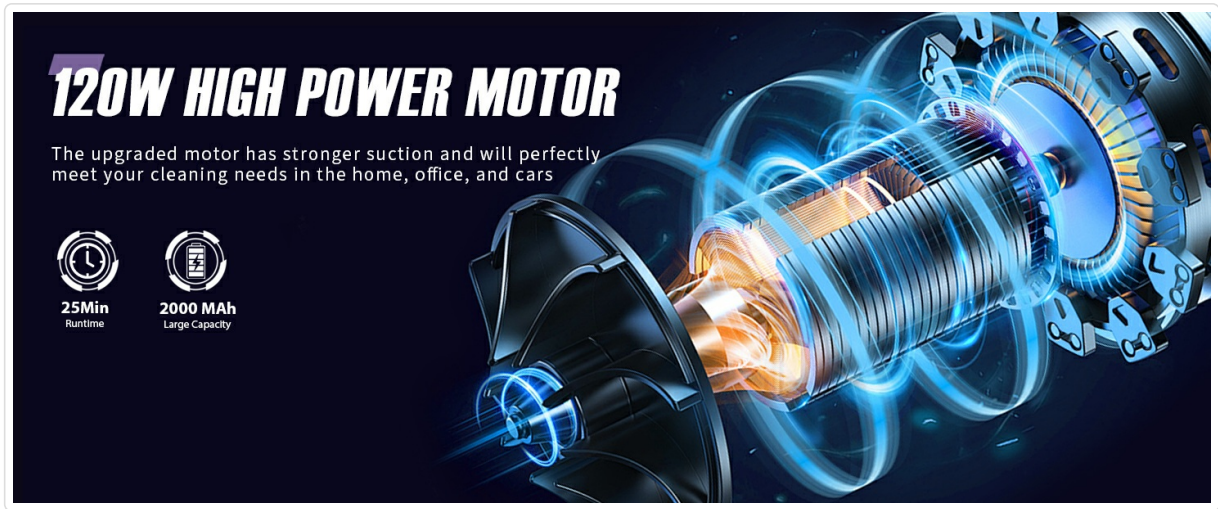


Image: A visual representation of the 120W high-power motor, emphasizing its role in providing strong suction and efficient performance for the Bossdan H9 vacuum.

CUSTOMER SUPPORT

If you encounter any issues or have questions regarding your Bossdan Handheld Cordless Vacuum H9, please contact our customer support team. We aim to respond to all inquiries within 24 hours. For support, please refer to the contact information provided with your purchase or visit the official Bossdan website.