

Mycket D009

Mycket DAB/DAB+/FM Portable Radio with Bluetooth 5.0 and Alarm Clock User Manual

Brand: Mycket | **Model:** D009

1. INTRODUCTION

This manual provides comprehensive instructions for the Mycket portable DAB/DAB+/FM radio, Model D009. It covers setup, operation, maintenance, and troubleshooting to ensure optimal performance and longevity of your device. Please read this manual carefully before using the product.

The Mycket D009 radio features advanced signal reception technology for clear audio, Bluetooth 5.0 for wireless streaming, USB playback, AUX-in connectivity, a dual alarm clock, and a sleep timer. Its integrated rechargeable battery offers portability for use in various environments.

2. SAFETY INSTRUCTIONS

- Do not expose the device to rain, moisture, or extreme temperatures.
- Avoid dropping or subjecting the device to strong impacts.
- Do not disassemble or attempt to repair the device yourself. Refer all servicing to qualified personnel.
- Keep the device away from heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
- Use only the specified charging cable and power adapter (5V via USB) to charge the device.
- Ensure proper ventilation around the device during operation and charging.
- Dispose of batteries and electronic components responsibly according to local regulations.

3. PRODUCT OVERVIEW

3.1 Package Contents

- 1 x Mycket Portable DAB Radio (Model D009)
- 1 x USB Charging Cable
- 1 x User Manual

3.2 Device Layout and Controls

Familiarize yourself with the main components and controls of your Mycket radio.



Image 1: Front view of the Mycket D009 portable DAB radio, showing the speaker grille, LCD display, control buttons (MODE, OK, O/M, FAV, 1-4), and the telescopic antenna extended. The right side shows the DC 5V USB-C port, reset button, and headphone jack.

DAB/DAB+/FM & Bluetooth Radio

Upgraded 4-in-1 radio with the advanced technology, you will have a premier digital radio experience



Image 2: Side view of the Mycket D009 radio illustrating its compact dimensions: approximately 5.5 inches (length), 1.6 inches (width), and 3.1 inches (height). The image also highlights its DAB/DAB+/FM and Bluetooth capabilities.

- **Display:** 2.4-inch TFT color display for station information, time, and settings.
- **Speaker:** Integrated Hi-Fi speaker for audio output.
- **Telescopic Antenna:** For optimal radio signal reception.
- **MODE Button:** Switches between DAB, FM, Bluetooth, USB, and AUX modes.
- **OK Button:** Confirms selections or enters menus.
- **O/M Button:** Power On/Off and Menu access.
- **FAV Button:** Accesses favorite presets.
- **Number Buttons (1-4):** Direct access to stored presets.
- **Navigation Buttons (Left/Right):** Navigates menus or tunes stations.
- **Volume Knob:** Adjusts audio volume.
- **DC 5V USB-C Port:** For charging the internal battery.
- **Reset Button:** Resets the device (use a thin object to press).
- **3.5mm Headphone Jack:** For private listening.

4. SETUP

4.1 Charging the Battery

The radio is equipped with a built-in 2200mAh lithium battery. Before first use, fully charge the device.

1. Connect the provided USB charging cable to the DC 5V USB-C port on the side of the radio.
2. Connect the other end of the USB cable to a compatible USB power adapter (not included) or a computer USB port.
3. The charging indicator on the display will show the charging status. A full charge typically takes approximately 2.5 hours and provides up to 12 hours of playback time at 70% volume.

PLAY MORE THAN 12 HOURS

Built-in 2200mAh rechargeable battery,
enjoy your favorite radio anywhere



Image 3: The Mycket D009 radio display showing a full battery indicator, emphasizing its long playback time on a single charge.

4.2 Antenna Adjustment

For optimal radio reception, fully extend the telescopic antenna. Adjust its position for the best signal quality.

4.3 Initial Power On

Press and hold the **O/M** button to power on the radio. The display will light up, and the device will typically start in the last used mode or initiate a DAB scan if it's the first use.

5. OPERATING INSTRUCTIONS

5.1 Switching Modes

Press the **MODE** button repeatedly to cycle through available modes: DAB, FM, Bluetooth, USB, and AUX.

5.2 DAB/DAB+ Radio Operation

1. Switch to DAB mode using the **MODE** button.
2. The radio will automatically perform a full scan for available DAB/DAB+ stations upon first use or if no stations are found. To initiate a manual scan, press and hold the **OK** button, then select "Full Scan" from the menu.
3. Once the scan is complete, use the navigation buttons (Left/Right) to browse through the list of available stations.
4. Press **OK** to select and listen to a station.



Image 4: The Mycket D009 radio display showing a DAB station and highlighting the auto-scan and 40 preset features (20 DAB & 20 FM).

5.2.1 Storing DAB Presets

The radio supports up to 20 DAB presets.

1. Tune to the desired DAB station.
2. Press and hold one of the number buttons **(1-4)** or the **FAV** button to save the current station to a preset slot. Follow the on-screen prompts to select a slot if using the FAV button.
3. To recall a preset, briefly press the corresponding number button or the **FAV** button and select from the list.

5.3 FM Radio Operation

1. Switch to FM mode using the **MODE** button.
2. To auto-scan for FM stations, press and hold the **OK** button. The radio will scan and store available stations.
3. To manually tune, use the navigation buttons (Left/Right) to adjust the frequency.
4. Press **OK** to confirm the station.

5.3.1 Storing FM Presets

The radio supports up to 20 FM presets, similar to DAB presets.

1. Tune to the desired FM station.
2. Press and hold one of the number buttons **(1-4)** or the **FAV** button to save the current station.
3. To recall a preset, briefly press the corresponding number button or the **FAV** button and select from the list.

5.4 Bluetooth 5.0 Pairing

Connect your smartphone or tablet to the radio via Bluetooth for wireless audio streaming.

1. Switch to Bluetooth mode using the **MODE** button. The radio display will show "Bluetooth Pairing" or similar.
2. On your mobile device, enable Bluetooth and search for available devices.
3. Select "Mycket D009" from the list of devices.
4. Once paired, the radio will confirm the connection, and you can play audio from your device through the radio.

BLUETOOTH 5.0

Enjoy your favorite music by connecting Bluetooth "Mycket D009"



Image 5: The Mycket D009 radio displaying "Playing" in Bluetooth mode, next to a smartphone showing "Mycket D009" as a connected Bluetooth device.

5.5 USB Playback

Play MP3 audio files directly from a USB drive.

1. Insert a USB drive containing MP3 files into the USB port.
2. Switch to USB mode using the **MODE** button.
3. The radio will automatically detect and begin playing MP3 files. Use the navigation buttons to skip tracks.

5.6 AUX-in Connection

Connect external audio devices using a 3.5mm audio cable (not included).

1. Connect one end of a 3.5mm audio cable to the AUX-in port on the radio.
2. Connect the other end to the headphone jack or audio output of your external device.
3. Switch to AUX mode using the **MODE** button.
4. Control playback from your external device.

5.7 Alarm Clock Function

Set up to two independent alarms.

1. Press and hold the **O/M** button to enter the menu.
2. Navigate to "Alarm Settings" using the navigation buttons and press **OK**.
3. Select Alarm 1 or Alarm 2.
4. Set the alarm time, source (DAB, FM, or Buzzer), and volume.
5. Confirm settings by pressing **OK**.

5.8 Sleep Timer Function

Set the radio to automatically turn off after a specified period.

1. Press and hold the **O/M** button to enter the menu.
2. Navigate to "Sleep Timer" and press **OK**.
3. Select the desired duration (e.g., 15, 30, 60 minutes).
4. The radio will automatically power off after the set time.

5.9 Headphone Use

Connect 3.5mm headphones to the headphone jack for private listening. The internal speaker will be muted automatically.

6. MAINTENANCE

- **Cleaning:** Use a soft, dry cloth to clean the radio's exterior. Do not use abrasive cleaners or solvents.
- **Battery Care:** To prolong battery life, avoid fully discharging the battery frequently. Charge the device regularly, even if not in use for extended periods.
- **Storage:** Store the radio in a cool, dry place away from direct sunlight and extreme temperatures.

7. TROUBLESHOOTING

Problem	Possible Cause	Solution
No power / Radio does not turn on.	Battery is depleted.	Charge the radio using the provided USB cable.
Poor radio reception (DAB/FM).	Antenna not fully extended or positioned correctly. Weak signal area.	Fully extend and adjust the telescopic antenna. Try moving the radio to a different location. Perform a full scan for stations.
Bluetooth pairing fails.	Radio not in Bluetooth mode. Device too far. Bluetooth not enabled on external device.	Ensure the radio is in Bluetooth mode. Keep devices within range (approx. 10 meters). Enable Bluetooth on your external device and search for "Mycket D009".
No sound from speaker.	Volume too low. Headphones connected.	Increase the volume. Disconnect headphones if not intended for private listening.
USB playback not working.	USB drive not inserted correctly. Incompatible file format.	Ensure USB drive is fully inserted. Check that files are in MP3 format.

Problem	Possible Cause	Solution
Device unresponsive.	Temporary software glitch.	Press the reset button on the side of the radio using a thin object (e.g., a paperclip).

8. SPECIFICATIONS


Brand	Mycket
Model	D009
Radio Modes	DAB, DAB+, FM
Bluetooth Version	5.0
Playback Options	FM, DAB, DAB+, Bluetooth, USB MP3, AUX-in
Speaker Output Power	5 Watts
Speaker Unit	4 Ω10 W 78 mm x 1
Display	2.4-inch TFT Color LCD
Presets	40 (20 DAB, 20 FM)
Battery Type	Built-in Lithium-ion (18650)
Battery Capacity	2200 mAh (3.7V - 2.2 Ah)
Playback Time	Approx. 8-9 hours at 70% volume (up to 12 hours)
Charging Time	Approx. 2.5 hours
Power Input	5V via USB
Dimensions (Product)	Approx. 14 cm (L) x 4 cm (W) x 7.8 cm (H)
Output Connections	3.5mm Headphone Jack

9. WARRANTY AND SUPPORT

Mycket products are designed for reliability and performance. This product comes with:

- **12-Month Warranty:** Enjoy a hassle-free 12-month warranty from the date of purchase.
- **Customer Support:** For any questions, issues, or support needs, please contact Mycket customer service.

Please retain your proof of purchase for warranty claims.

 Portable DAB+ / FM Radio User Manual ENG User manual FRA Manuel de l'utilisateur ITA Manuale d'uso DEU Benutzerhandbuch NLD Handleiding	Portable DAB+ / FM Radio User Manual - Operation and Specifications Comprehensive user manual for the mycket Portable DAB+ / FM Radio with Bluetooth. Includes setup, operation, system settings, specifications, and troubleshooting.
 Portable DAB+ / FM Radio User Manual ENG User manual FRA Manuel de l'utilisateur ITA Manuale d'uso DEU Benutzerhandbuch NLD Handleiding	Mycket Portable DAB/FM Radio User Manual Comprehensive user manual for the Mycket Portable DAB/FM Radio, covering setup, operation, features like Bluetooth connectivity, alarms, FM/DAB tuning, and specifications.
 Portable DAB+ / FM Radio User Manual ENG User manual FRA Manuel de l'utilisateur ITA Manuale d'uso DEU Benutzerhandbuch NLD Handleiding	Portable DAB+ / FM Radio User Manual - Operation and Specifications Comprehensive user manual for the mycket Portable DAB+ / FM Radio with Bluetooth. Includes setup, operation, system settings, specifications, and troubleshooting.
 Portable DAB+ / FM Radio User Manual ENG User manual FRA Manuel de l'utilisateur ITA Manuale d'uso DEU Benutzerhandbuch NLD Handleiding	Mycket Portable DAB/FM Radio User Manual Comprehensive user manual for the Mycket Portable DAB/FM Radio, covering setup, operation, features like Bluetooth connectivity, alarms, FM/DAB tuning, and specifications.
 i-box Pocket Personal DAB Radio Persoonlijke DAB-radio Radio DAB personal Radio DAB personnelle Persoonlijke DAB-radio	i-box Pocket Personal DAB Radio User Manual User manual for the i-box Pocket DAB/DAB+/FM Radio, detailing features, operation, safety information, troubleshooting, and specifications for this portable digital radio.
 i-box Pocket Personal DAB Radio Persoonlijke DAB-radio Radio DAB personal Radio DAB personnelle Persoonlijke DAB-radio	i-box Pocket Personal DAB Radio User Manual User manual for the i-box Pocket Personal DAB/DAB+/FM Radio. Learn about its features, setup, operation, and troubleshooting for this portable digital radio.



[\[pdf\]](#) User Manual Quick Start Guide Guide

3G3RX snabbstart svenska V1 00 duntom i130e rx getting started guide sv assets omron eu manual v2

3G3RX Quick Guide v1.0 3G3RX Snabbstart Quick Guide 3G3RX Innehållsfrteckning

1. SPECIFIKATIONER ... d001 d002 Utgngsfrekvens Utgngsstrm vervakning

Beskrivning d005 Status p digitala ingngar d006 **d009** d012 d013 d014 d018 d019

d081 d082 d083 d084 d085 d086 d090 d102 Status p digitala utgngar Mom...

lang:i-klingson **score:31** filesize: 337.96 K page_count: 19 document date: 2012-03-20



[\[pdf\]](#) Installation Guide

D0091001M sony electronics support res manuals D009 645250b69c9c313a331089481f776536 |||

Wall-Mount Bracket Installation Information GB Informations d installation FR

Informacin de instalacin ES Installationsinformationen DE Installatie-informatie NL

Informazioni sull installazione IT Installationsinformation SE Informacje dotyczce

instalacji PL Informaes de instalao P...

lang:en **score:19** filesize: 34.48 M page_count: 368 document date: 0000-00-00



[\[pdf\]](#) Installation Guide

sony co uk electronics support res manuals D009 645250b69c9c313a331089481f776536 D009100Sony

AF9 Wallmount Compatibility Sonyv1sony D0091001M |||

Wall-Mount Bracket Installation Information GB Informations d installation FR

Informacin de instalacin ES Installationsinformationen DE Installatie-informatie NL

Informazioni sull installazione IT Installationsinformation SE Informacje dotyczce

instalacji PL Informaes de instalao P...

lang:en **score:17** filesize: 34.48 M page_count: 368 document date: 2021-10-13

Raymarine

**ST1000 Plus
och
ST2000 Plus
autopiloter
Handbok**

Datum: April 2001
81130-1-SV

[\[pdf\]](#) User Manual

Innehåller produktmanual för ST1000 Plus och ST2000 autopiloter Handbok manual og 2000 marineshop no
userfiles ProductDocuments raymarine |||

ST1000 Plus och ST2000 Plus autopiloter Handbok Datum: April 2001 81130-1-SV
Förord 1 Raymarine ... under rorkult 25 mm 51 mm 76 mm 102 mm 127 mm Mtt E 51
mm 76 mm 102 mm 127 mm 152 mm Kat. nr **D009** D010 D011 D012 D013 40
ST1000 Plus och 2000 Plus Handbok Konsolmontering Om autopiloten ms...
lang: no score: 15 filesize: 1.65 M page_count: 72 document date: 2011-10-28

Raymarine

**ST1000 Plus
och
ST2000 Plus
autopiloter
Handbok**


Datum: April 2001
81130-1-SV

[\[pdf\]](#) User Manual

Innehåller produktmanual för 81130 1 sv 11upjKøb Raymarine Rörpindspilot ST1000 Watski dk81130 11upjcdn
watski files 11upj st2000 manual 244603881130 ST2000 dkKøb dkst2000 2446038cdn |||

ST1000 Plus och ST2000 Plus autopiloter Handbok Datum: April 2001 81130-1-SV F
örord 1 Raymarin ... r rorkult 25 mm 51 mm 76 mm 102 mm 127 mm M tt E 51 mm 76
mm 102 mm 127 mm 152 mm Kat. nr **D009** D010 D011 D012 D013 40 ST1000 Plus
och 2000 Plus - Handbok Konsolmontering Om autopiloten m...
lang: no score: 14 filesize: 1.65 M page_count: 72 document date: 2011-10-28

Makita




[\[pdf\]](#) User Manual Instructions

WELDY book edgar gulde HG5012 551 651 8NE icmsmakita eu cms custom fi user manual |||

AB HG5012 0 I 1 I I I B HG551V 0 I 1 I I I C HG651C 0 1 I 3 2 3 2 3 - 2 - Deutsch
300 ** NN 4 * 06 5 EF9IEK9IL9LEHL9LEHL9LEM9IL9LEJL9LEJ 0.68 0D.97I4L 0.74
0.72 **D009**.,J76G80 0.78 1.5 1E.96F3L 1.63 1.6 E19.G73M2 1.72 FGDLD FHD
M9EG9FM9I : = 3.01/ . 40...

lang: tl score: 11 filesize: 10.04 M page_count: 116 document date: 2014-05-08

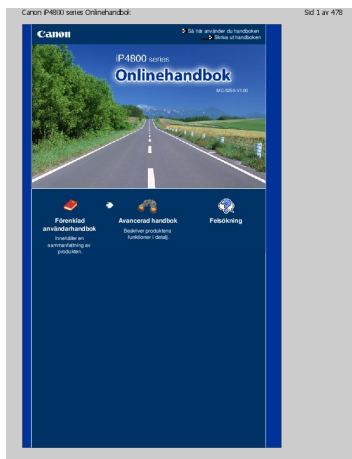

[\[pdf\]](#) User Manual

Canon iP4800 series Onlinehandbok Avancerad handbok Underhåll Utföra underhåll från en dator

Rengöra skrivhuvuden Rengöring Cleaning förbrukar liten mängd bläck SV files canon europe soft39750 manual |||

Canon iP4800 series Onlinehandbok S hr anvnder du handboken Skriva ut

handboken Sid 1 av 478 MC-5 ... men Avancerad handbok Om utskrift av skivetikett

Felskning Ett meddelande visas p datorskrmen **D009** Ett meddelande visas p

datorskrmen Fel om Skivetikettutskrift visas Kontroll 1: r den inre luck...

lang:no score:10 filesize: 8.72 M page_count: 478 document date: 2010-10-28