

[Manuals.plus](#) /

› [Gawfolk](#) /

› Gawfolk 38 Inch Ultrawide Curved Gaming Monitor User Manual

## Gawfolk GF400A

# Gawfolk 38 Inch Ultrawide Curved Gaming Monitor

## MODEL: GF400A - USER MANUAL

Thank you for choosing Gawfolk. This manual provides essential information for the safe and optimal use of your new monitor.

## 1. Setup Guide

---


Follow these steps to set up your Gawfolk 38-inch Ultrawide Curved Gaming Monitor.

### 1.1 Unboxing and Inspection

Carefully remove all components from the packaging. Inspect the monitor and accessories for any signs of damage. If any damage is found, do not proceed with setup and contact customer support.

### 1.2 Stand Assembly

Attach the monitor stand to the back of the monitor. Ensure all screws are securely fastened. The stand is designed for stability and ergonomic adjustments.

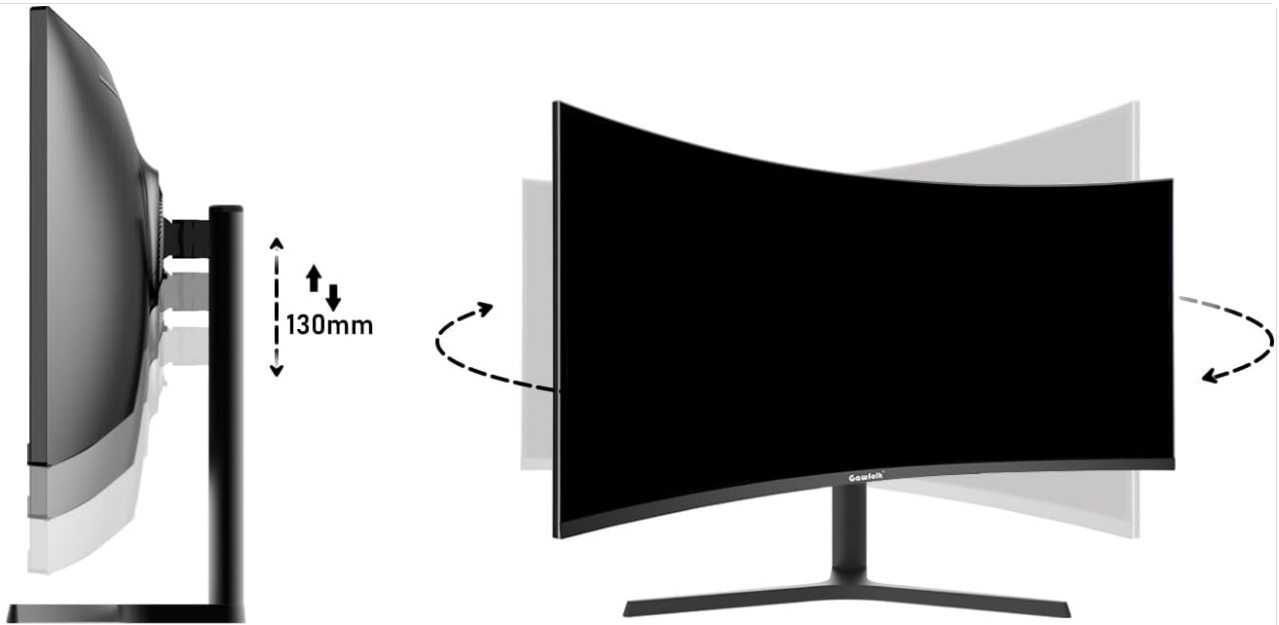

① 130mm vertical lift

② rotate right or left



③ -5°~15° tilt adjustment



④ Wall Mount Compatible 100\*100MM


This image illustrates the multi-functional stand, demonstrating its 130mm vertical lift, ability to rotate right or left, and a tilt adjustment range of -5° to 15°.

### 1.3 Connecting Your Monitor

Connect the monitor to your computer or other devices using the appropriate cables. The monitor supports various input options.

- **DisplayPort (DP):** For optimal performance, including 144Hz refresh rate.
- **HDMI:** Supports up to 100Hz refresh rate.
- **Audio Output:** For connecting external speakers or headphones.

# INTERFACE & DIMENSIONS

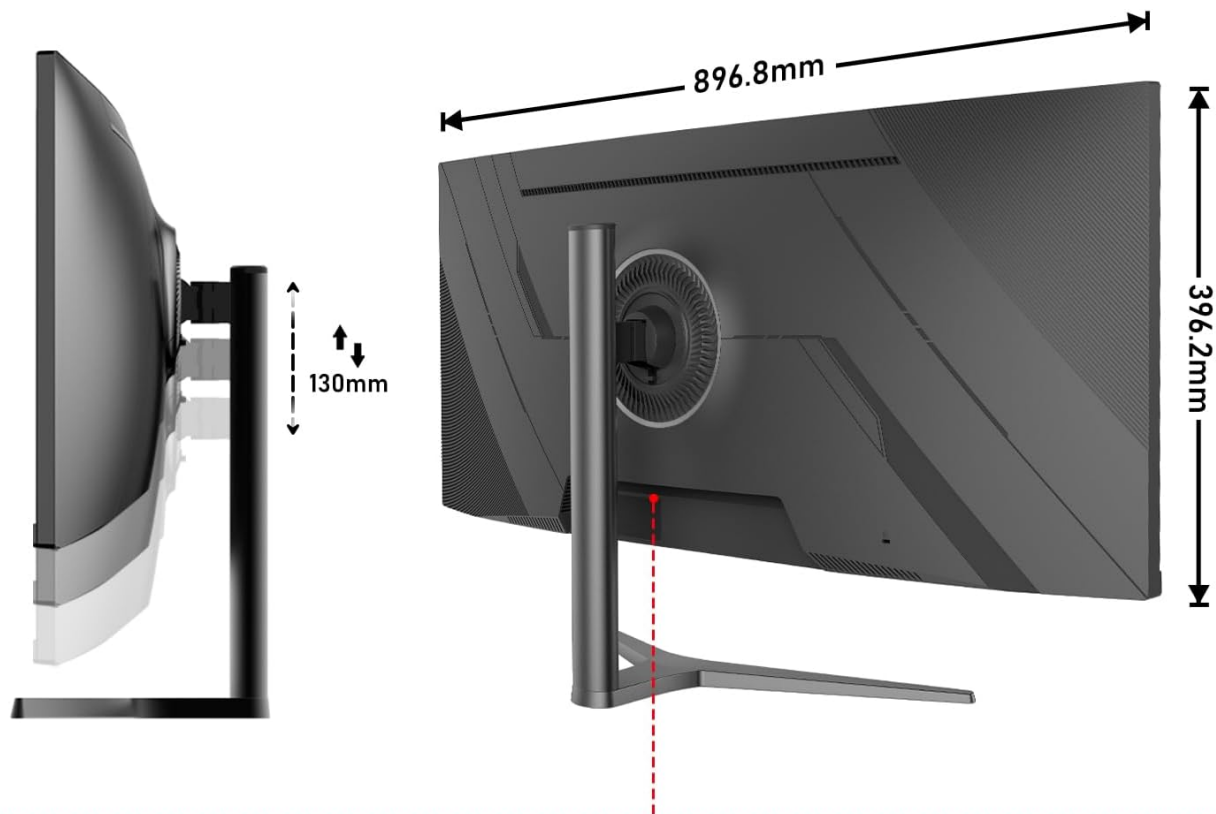

DC



DP version 1.4



DP version 1.4



HDMI version 2.0



HDMI version 2.0



Audio output

## HDMI (up to 100 Hz), DP (up to 144 Hz)

The default refresh rate of the monitor is 60 Hz. If your computer supports 144 Hz, connect the monitor via the supplied DP cable and go to the display settings to change the refresh rate.

This image displays the available interfaces on the monitor, including DC power input, two DisplayPort 1.4 ports, two HDMI 2.0 ports, and an audio output jack. It also provides the monitor's dimensions.

After connecting, plug the power adapter into the monitor and then into a power outlet.

### 1.4 Wall Mounting (Optional)

The monitor is compatible with 100x100mm VESA wall mounts. Ensure you use a VESA-compliant mount and follow the mount manufacturer's instructions for safe installation.

## 2. Operating Instructions

Learn how to operate and optimize your monitor's settings.

### 2.1 Power On/Off

Press the power button, usually located on the back or bottom of the monitor, to turn it on or off. The power indicator light will illuminate when the monitor is active.

## 2.2 On-Screen Display (OSD) Menu


Access the OSD menu using the control buttons on the monitor. This menu allows you to adjust various display settings.

## 2.3 Display Settings

- **Resolution:** The native resolution is 3840x1600 (UWQHD). Ensure your computer's display settings are configured to this resolution for the best image quality.
- **Refresh Rate:** The monitor supports up to 144Hz via DisplayPort and 100Hz via HDMI. The default refresh rate may be 60Hz. Adjust this in your computer's display settings to utilize the higher refresh rates.
- **Color Settings:** Adjust brightness (350 nits peak), contrast, color temperature, and gamma. The monitor supports 10-bit color and 120% sRGB for rich and accurate colors.
- **Low Blue Light Mode:** Activate this mode to reduce eye strain during prolonged use. This feature uses DC global dimming technology to achieve flicker-free operation.



This image illustrates the monitor's capability to display rich colors, emphasizing its 10-bit color depth (1.07 billion colors), 120% sRGB color gamut, and 350 cd/m<sup>2</sup> peak brightness.

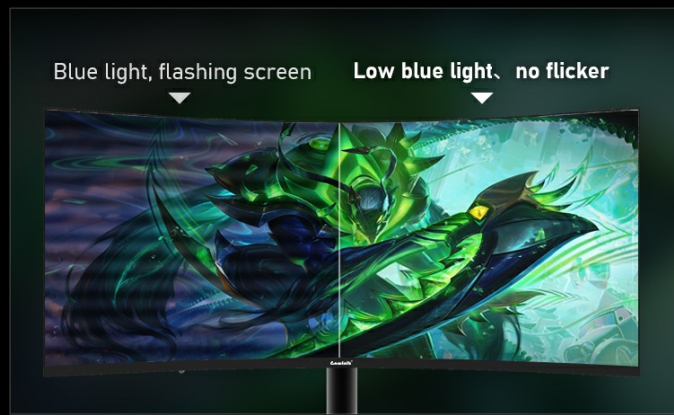

## LOW BLUE LIGHT NO FLICKERING

Using DC dimming technology, it can significantly reduce the phenomenon of screen flickering and low blue light technology can effectively filter blue light and protect eyesight.

This image highlights the monitor's low blue light and flicker-free technology, designed to protect eyesight during extended use.

### 2.4 Gaming Features

- **FreeSync™ / G-Sync™ Support:** Enable these technologies in your graphics card settings to synchronize the monitor's refresh rate with the GPU's frame rate, preventing screen tearing and stuttering.
- **1ms GTG Response Time:** This ultra-fast response time minimizes motion blur and ghosting, providing a smooth gaming experience.

# FAST HIGH BRUSH

It supports 144Hz fast refresh for 1 second to quickly refresh 144 frames, and the ultra-fast response time of 1ms allows gamers to enjoy a lag-free operation

**144Hz**  
Refresh rate

**1ms GTG**  
Response time



This image emphasizes the monitor's fast performance with a 144Hz refresh rate and 1ms GTG response time, crucial for smooth gaming.

This image explains the benefits of FreeSync Premium and G-Sync technology in eliminating screen tearing, flicker, and stutter for a smoother visual experience.

## 2.5 Ergonomic Adjustments

Utilize the multi-functional stand to adjust the monitor to your preferred viewing angle:

- **Height Adjustment:** Lift or lower the monitor between 2.8 to 7.4 inches.
- **Tilt Adjustment:** Tilt the screen from  $-5^{\circ}$  to  $15^{\circ}$  to reduce glare and improve viewing comfort.
- **Rotation:** Rotate the monitor left or right for collaborative viewing or specific content needs.

## 3. Maintenance

---

Proper maintenance ensures the longevity and optimal performance of your monitor.

### 3.1 Cleaning the Screen

Gently wipe the screen with a soft, lint-free cloth. For stubborn marks, lightly dampen the cloth with water or a specialized screen cleaner. Avoid using harsh chemicals, abrasive materials, or spraying liquid directly onto the screen.

### 3.2 Cleaning the Monitor Body

Use a soft, dry cloth to clean the monitor's casing. Do not use solvents or abrasive cleaners.

### 3.3 Storage

If storing the monitor for an extended period, disconnect all cables and store it in a cool, dry place, preferably in its original packaging to protect it from dust and physical damage.

## 4. Troubleshooting

---

This section addresses common issues you might encounter with your monitor.

### 4.1 No Image on Screen

- Ensure the power cable is securely connected to both the monitor and the power outlet.
- Verify that the video cable (DP or HDMI) is firmly connected to both the monitor and your computer's graphics card.
- Check if the monitor is set to the correct input source via the OSD menu.
- Confirm your computer is powered on and not in sleep mode.

### 4.2 Image Flickering or Distorted

- Ensure the video cable is not loose or damaged. Try a different cable if available.
- Verify that your graphics card drivers are up to date.
- Check the refresh rate setting in your computer's display settings. If using HDMI, ensure it's not set above 100Hz. If using DisplayPort, ensure it's not set above 144Hz.
- Disable FreeSync/G-Sync in your graphics card settings temporarily to see if the issue persists.

### 4.3 No Sound from Audio Output

- Ensure external speakers or headphones are properly connected to the monitor's audio output jack.
- Check the volume settings on your computer and the monitor's OSD menu.
- Verify that the audio output device is correctly selected in your computer's sound settings.

## 5. Specifications

---

Detailed technical specifications for the Gawfolk 38-inch Ultrawide Curved Gaming Monitor.

Feature	Specification
Model Number	GF400A
Screen Size	38 Inches
Curvature	2500R
Aspect Ratio	21:9
Resolution	3840 x 1600 (UWQHD)
Refresh Rate	144Hz (DP), 100Hz (HDMI)
Response Time	1ms GTG
Color Depth	10-bit (1.07 billion colors)
Color Gamut	120% sRGB
Brightness	350 Candela (nits)
Viewing Angle	178° (Horizontal/Vertical)
Product Dimensions	7.95 x 35.31 x 20.39 inches
Item Weight	24.2 pounds
Wall Mount Compatibility	100 x 100mm VESA

## 6. Warranty and Support

---

Gawfolk provides after-sales service to ensure your satisfaction.

### 6.1 Warranty Period

Your Gawfolk monitor comes with a **12-month after-sales service warranty** from the date of purchase.

### 6.2 Customer Support

If you encounter any problems during the use of your monitor, please do not hesitate to communicate with us. Our customer support team is available to assist you with troubleshooting, technical queries, and warranty claims.

Please refer to the contact information provided with your product packaging or visit the official Gawfolk website for support details.

