Inateck KB01105-G-US2

Inateck Bluetooth Keyboard with Touchpad User Manual

Model: KB01105-G-US2
Brand: Inateck

1. Introduction

Thank you for choosing the Inateck Bluetooth Keyboard with Touchpad. This ultra-slim and portable wireless QWERTY keyboard is designed for seamless connectivity across multiple devices, including Windows and iPad OS. It features a precise touchpad and dedicated shortcut keys to enhance your productivity and typing experience. This manual provides detailed instructions for setup, operation, maintenance, and troubleshooting to ensure optimal performance of your device.

Image: Top-down view of the Inateck Bluetooth Keyboard with Touchpad, showcasing its full QWERTY layout and integrated touchpad.

2. Setup

2.1 Charging the Keyboard

Before first use, fully charge the keyboard. Connect the provided USB-C cable to the keyboard's charging port and the other end to a USB power source (e.g., computer USB port, USB wall adapter). The charging indicator light will show the charging status. A full charge can provide up to 150 days of standby time.

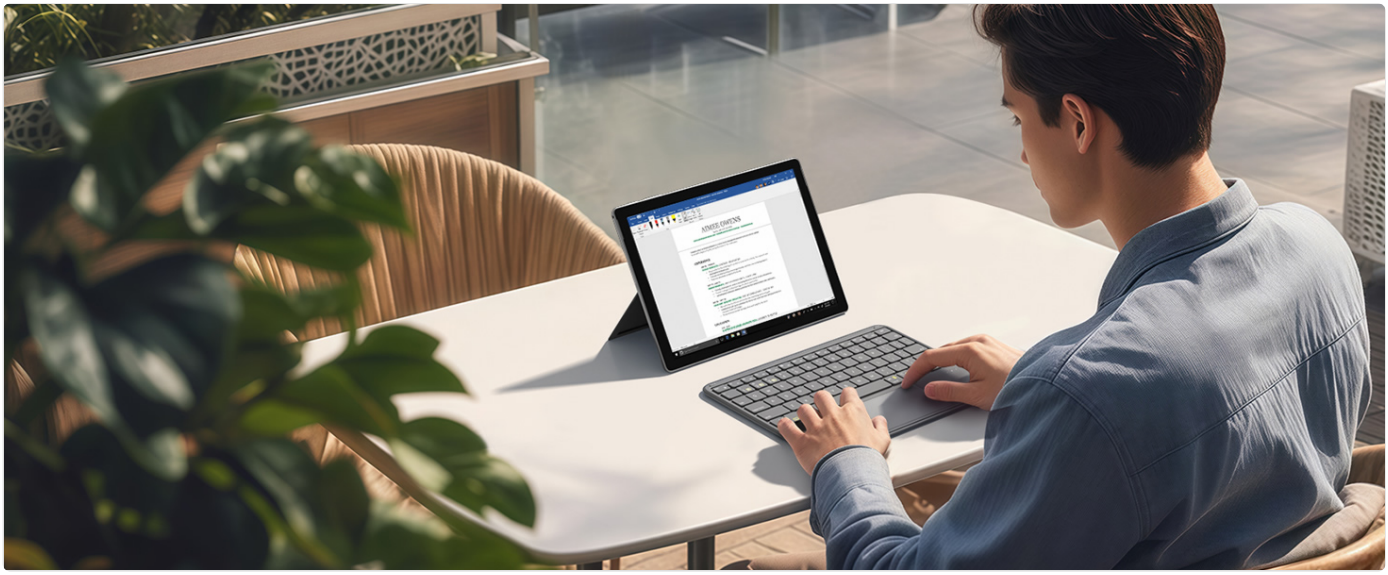

Image: Illustration showing the keyboard being charged via a USB-C cable, highlighting its long standby time.

2.2 Powering On/Off

Locate the power switch on the side of the keyboard. Slide it to the "ON" position to power on the keyboard. Slide it to the "OFF" position to power off the keyboard when not in use to conserve battery.

2.3 Bluetooth Pairing

The keyboard supports connecting up to 3 devices simultaneously via Bluetooth 5.3.

1. Ensure the keyboard is powered on.
2. Press and hold the **Fn** key and one of the Bluetooth channel keys (**1**, **2**, or **3**) for 3-5 seconds until the corresponding indicator light flashes rapidly. This indicates the keyboard is in pairing mode.
3. On your device (tablet, computer, smartphone), go to Bluetooth settings and search for available devices.
4. Select "Inateck KB01105" (or similar name) from the list of found devices.
5. Follow any on-screen prompts to complete the pairing process. The indicator light on the keyboard will stop flashing and remain solid for a few seconds, then turn off, indicating successful pairing.
6. Repeat steps 2-5 for additional devices, assigning each to a different Bluetooth channel (1, 2, or 3).

Image: The Inateck keyboard wirelessly connected to a laptop, a monitor, and a tablet, demonstrating its multi-device connectivity.

3. Operating Instructions

3.1 Switching Between Devices

To switch between paired devices, simply press the**Fn** key along with the corresponding Bluetooth channel key (**1**, **2**, or **3**) for the desired device. The keyboard will automatically connect to the selected device.

3.2 Keyboard Layout and Shortcut Keys

The keyboard features a QWERTY layout with dedicated shortcut keys in the first row for quick access to common functions. These shortcuts are optimized for Windows and iPad OS.

Common Shortcut Functions

Key Combination	Function
Fn + Esc	Home Screen (iPad OS) / Escape (Windows)
Fn + F1	Brightness Down
Fn + F2	Brightness Up
Fn + F3	Search
Fn + F4	Virtual Keyboard (iPad OS) / Task View (Windows)
Fn + F7	Previous Track
Fn + F8	Play/Pause
Fn + F9	Next Track
Fn + F10	Mute Volume

Key Combination	Function
Fn + F11	Volume Down
Fn + F12	Volume Up
Fn + Lock Key	Lock Screen

Image: Close-up of the keyboard showing the Fn key and the numbered Bluetooth channel keys, along with the function row keys.

3.3 Touchpad Functions

The integrated touchpad supports various gestures for navigation and control, providing a laptop-like experience.

Touchpad Gestures (General)

Gesture	Description
Single Finger Tap	Left Click
Two Finger Tap	Right Click (Windows) / Secondary Click (iPad OS)
Two Finger Scroll	Scroll up/down or left/right
Pinch to Zoom	Zoom in/out (supported on some OS)
Three Finger Swipe Up	Task View (Windows) / App Switcher (iPad OS)
Three Finger Swipe Down	Show Desktop (Windows)

Note: Touchpad gesture support may vary depending on the operating system (Windows, iPad OS, Mac OS, Fire OS, Android). Refer to the compatibility table in the Specifications section for detailed support.

Image: A hand interacting with the keyboard's touchpad, illustrating its smooth and lag-free operation.

4. Maintenance

4.1 Cleaning

To clean your keyboard, power it off first. Use a soft, lint-free cloth slightly dampened with water or a mild cleaning solution. Avoid excessive moisture and do not spray cleaners directly onto the keyboard. For stubborn dirt between keys, use compressed air.

4.2 Storage

Store the keyboard in a cool, dry place away from direct sunlight and extreme temperatures. If storing for an extended period, ensure the keyboard is fully charged before storage and recharge it every few months to maintain battery health.

5. Troubleshooting

- **Keyboard not connecting:**
  - Ensure the keyboard is powered on and fully charged.
  - Verify Bluetooth is enabled on your device.
  - Put the keyboard into pairing mode (Fn + 1/2/3 for 3-5 seconds).
  - Forget the device in your device's Bluetooth settings and attempt to re-pair.
  - Ensure the keyboard is within the 10-meter Bluetooth range.
- **Keys not responding:**
  - Check battery level and charge if necessary.
  - Reconnect the Bluetooth connection.
  - Restart the keyboard and your device.
- **Touchpad not working or laggy:**
  - Ensure the keyboard is fully charged.
  - Check if the touchpad is enabled in your device's settings (if applicable).
  - Some gestures may not be supported on all operating systems. Refer to the compatibility table.
  - Clean the touchpad surface.
- **Intermittent connection:**
  - Move closer to your device to reduce interference.
  - Ensure no other strong wireless signals are interfering.
  - Re-pair the keyboard.

6. Specifications

Feature	Detail
Brand	Inateck
Model Number	KB01105-G-US2
Connectivity Technology	Bluetooth 5.3
Keyboard Layout	QWERTY
Number of Keys	78
Dimensions (LxWxH)	9.85 x 7.11 x 0.28 inches

Feature	Detail
Item Weight	8 ounces (approx. 228g)
Power Source	Battery Powered (1 Lithium Ion battery, included)
Standby Time	Up to 150 days (on full charge)
Keystroke Lifespan	Over 5 million keystrokes
Compatible Devices	Laptop, PC, Tablet, Smartphone
Compatible Operating Systems	Windows, iPad OS, Mac OS, Android, Fire OS

6.1 Touchpad Compatibility Matrix

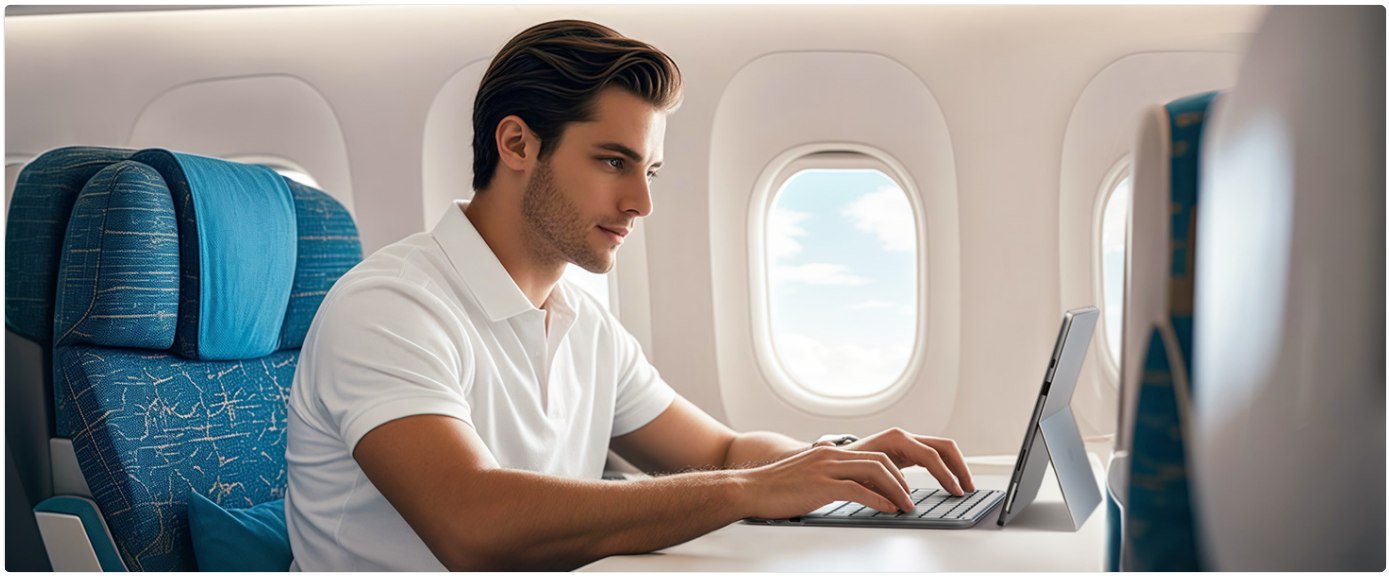

Image: Table detailing which touchpad gestures are supported across different operating systems (iPad OS, Windows, Mac OS, Fire OS, Android).

6.2 Shortcut Key Compatibility Matrix

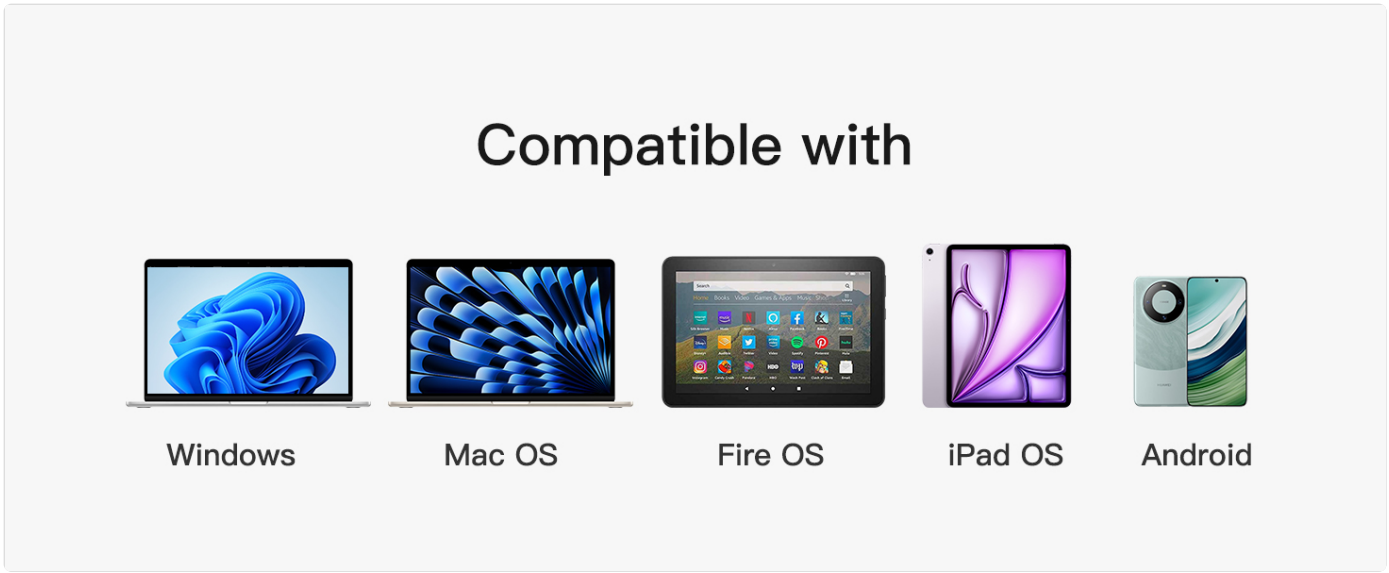

Image: Table detailing which shortcut keys are supported across different operating systems (iPad OS, Windows, Mac OS, Fire OS, Android).

7. Warranty and Support

Inateck products come with a standard manufacturer's warranty. For detailed warranty information, product support, or technical assistance, please visit the official Inateck website or contact their customer service.

Official Inateck Store: Visit Inateck Store on Amazon

© 2025 Inateck. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question