

## TTQ Vlog Selfie Monitor Screen

# TTQ Vlog Selfie Monitor Screen User Manual

Model: Vlog Selfie Monitor Screen

Brand: TTQ

### INTRODUCTION

This manual provides detailed instructions for the safe and effective use of your TTQ Vlog Selfie Monitor Screen. Please read this manual thoroughly before operating the device and retain it for future reference.

### SAFETY INFORMATION

- Do not expose the device to extreme temperatures or humidity.
- Avoid dropping or subjecting the device to strong impacts.
- Keep the device away from water and other liquids.
- Do not attempt to disassemble or repair the device yourself. Contact qualified personnel for service.
- Use only the provided accessories or compatible components.

### WHAT'S IN THE BOX

Verify that all items are present in the package:

- Vlog Selfie Monitor Screen x1
- Bluetooth Remote Control x1
- Magnetic Ring x2
- Dual USB-C Cable x1
- User Manual x1

### SETUP

#### 1. Attaching the Monitor to Your Phone

The monitor features N52 magnetic suction for instant attachment to iPhone 15/16 series. For other compatible phones, use the included magnetic sheet for secure attachment.



Image: The monitor securely attaches to the back of a smartphone via strong MagSafe adsorption. An included magnetic sheet can be used for non-MagSafe compatible phones.

## 2. Connecting the Monitor

Connect the monitor to your smartphone using the provided Dual USB-C cable. This enables plug-and-play 4K@30fps recording with real-time audio sync.

# 4K@30fps Video & Audio Sync

Plug-and-Play

iPhone 15/16 Dual USB-C Cable

# USB-C



4K 30fps Video without Delay



Image: A visual representation of the dual USB-C cable connecting the monitor to an iPhone, highlighting 4K@30fps video and audio sync capabilities.

## 3. Power Supply Selection

The monitor is powered directly by your phone via the USB-C connection. It does not have a built-in battery. You can also power your phone through the monitor using the Type-C passthrough charging port.

## Side Button Usage Guide

Short press the side button to switch between three screen ratios



**1:1**

1:1 Ratio  
for perfect square  
reproduction.




**Reduced horizontal**

Reduced horizontal  
margins to fit  
display edges.




**Full screen**

Full-screen mode  
to maximize the  
selfie screen.



**MFB**

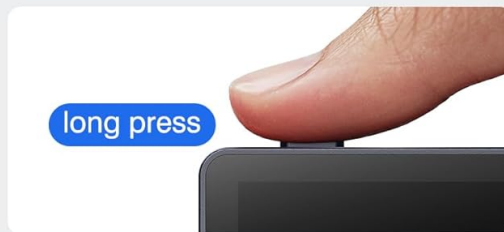

**long press**

\*Long press the side button to realize the screen mirroring and recovery functions.

Image: Illustrations of different power sources such as USB chargers, laptops, computers, and power banks that can be used to power the monitor and charge the phone.

### 4. Bluetooth Remote Control Pairing

The included Bluetooth remote control works up to 33ft away. To pair, ensure Bluetooth is enabled on your phone and follow the standard pairing procedure for new devices. This remote allows for remote control of video recording and photo capture.



# 33ft Bluetooth Remote Control

App-free, bluetooth connection



**Bluetooth 33ft**

Capture your moments at a super long distance of 10 metres



Image: A user demonstrating the use of the Bluetooth remote control to operate the phone and monitor setup from a distance of 33 feet.

## OPERATING INSTRUCTIONS

### 1. Using the Monitor for Vlogging and Live Streaming

The monitor allows you to see what your phone's rear camera sees, enabling high-quality vlogging and live streaming. The 400-lumen HD screen provides clear visuals even in direct sunlight with zero-latency playback.

## Rear Camera for Flawless Selfie

App-free, bluetooth connection



Image: A split image showing the audience's perspective of a live stream and the anchor's view using the monitor, demonstrating how the monitor simplifies live broadcasting with the rear camera.

### 2. Rear Camera for Flawless Selfies

Utilize your phone's superior rear camera for selfies and vlogging while monitoring your shot on the external screen. This ensures higher quality images and videos compared to front-facing cameras.

## Compatible Phone Models



### iPhone

iPhone 15

16 Series  
and above



### Samsung

Galaxy S21

S23/S24/S25

Z Fold 5

Galaxy  
Note 20, etc.



### Google

Pixel 8

Pixel 9 Series

,etc.



### OnePlus

OnePlus 9

OnePlus 10

OnePlus 12

,etc.



### Motorola

Motorola  
Edge

Motorola  
Edge+

, etc.



\*Only smartphones that support USB-C OTG functionality, displayport alternate mode are compatible. Please make sure if the brand and model are supported.

# TTQ


Image: A visual comparison illustrating the improved image quality (e.g., 48 Million-pixel vs. 12 Million-pixel) when using the phone's rear camera with the monitor for selfies, compared to the front camera.

### 3. One-Click Rotation

The monitor features a 180° rotation button that instantly flips images, preventing upside-down footage during transitions or changes in phone orientation.

### 4. Screen Ratio Adjustment

Short press the side button (MFB) on the monitor to switch between three screen ratios: 1:1 Ratio (for perfect square reproduction), Reduced Horizontal (reduced horizontal margins to fit display edges), and Full Screen (to maximize the selfie screen).

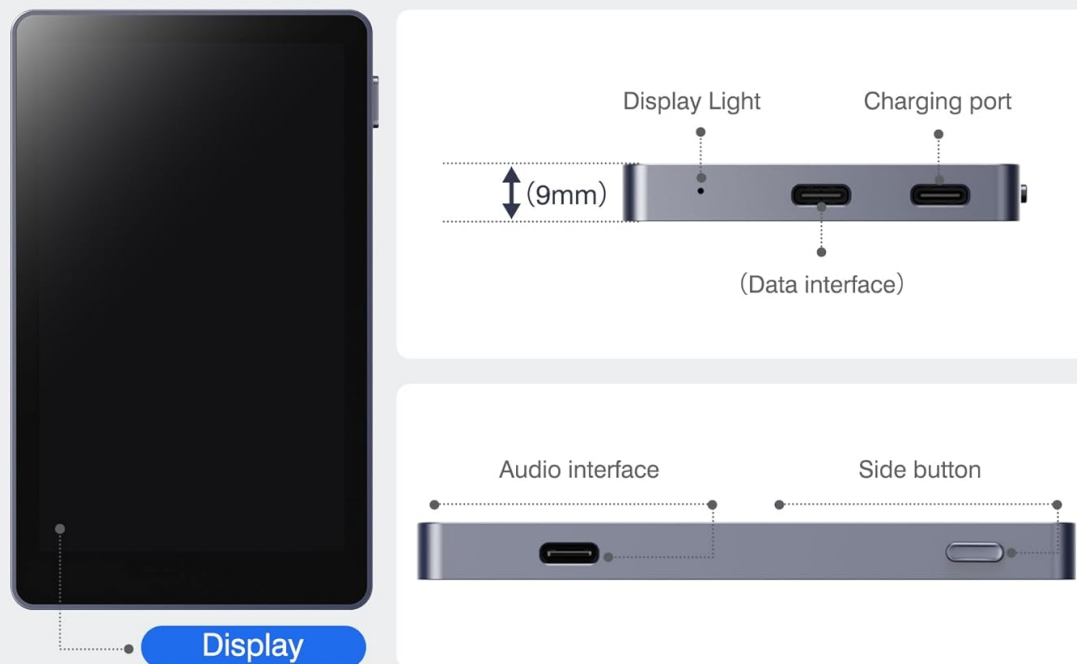

## Power Supply Selection

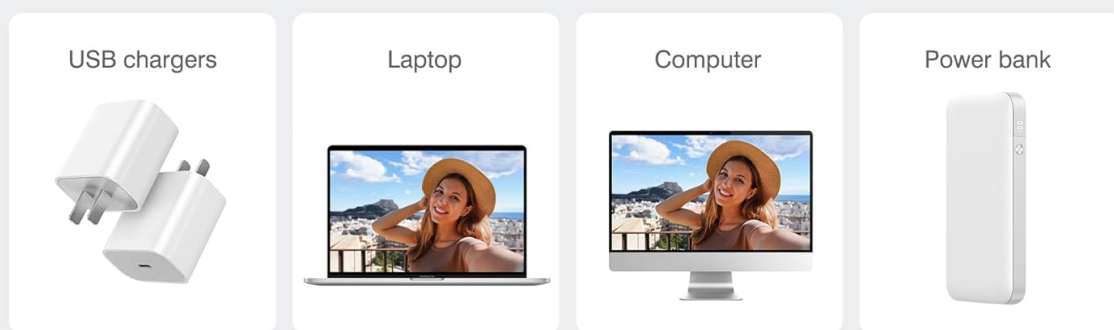


Image: A detailed guide showing the side button (MFB) and its function to cycle through different screen aspect ratios (1:1, Reduced Horizontal, Full Screen) for optimal viewing.

## 5. Uninterrupted Audio & Compatibility

The monitor preserves all phone audio functions during recording. You can take calls, play music, or receive notifications without interrupting your video feed.

## MAINTENANCE

To ensure the longevity and optimal performance of your TTQ Vlog Selfie Monitor Screen, follow these maintenance guidelines:

- **Cleaning:** Gently wipe the screen and body with a soft, dry, lint-free cloth. For stubborn smudges, slightly dampen the cloth with water. Avoid using harsh chemicals, abrasive cleaners, or solvents.
- **Storage:** When not in use, store the monitor in a cool, dry place, away from direct sunlight and extreme temperatures.
- **Cable Care:** Handle the USB-C cable with care. Avoid bending or twisting it excessively, which can damage the internal wires.
- **Magnetic Ring:** Ensure the magnetic ring (if applied) remains securely attached to your phone or phone case.



## TROUBLESHOOTING

Problem	Possible Cause	Solution
Monitor screen is blank or not displaying.	Incorrect cable connection or phone incompatibility.	Ensure the Dual USB-C cable is securely connected to both the monitor and your phone. Verify your phone supports USB-C OTG functionality or DisplayPort alternate mode.
Image is upside down.	Monitor orientation needs adjustment.	Press the 180° rotation button on the monitor to flip the image.
Screen display is squished or incorrect aspect ratio.	Incorrect screen ratio setting.	Short press the side button (MFB) to cycle through the available screen ratios (1:1, Reduced Horizontal, Full Screen) until the display is correct.
Bluetooth remote not connecting.	Remote not paired or out of range.	Ensure Bluetooth is enabled on your phone and the remote is within 33ft. Re-pair the remote if necessary.
Phone display is in landscape mode, but monitor shows vertical.	Phone orientation lock.	Lock your phone's screen orientation to Portrait mode before launching the camera app. Then, physically rotate your phone horizontally for correct landscape display on the monitor.
Samsung DeX mode is not working.	Product limitation.	The TTQ Vlog Selfie Monitor Screen only provides screen mirroring for rear-camera viewing when taking photos or videos; Samsung DeX is not supported.

## SPECIFICATIONS

- **Product Dimensions:** 4.56 x 3.77 x 1.25 inches
- **Item Weight:** 4.6 ounces
- **Video Resolution:** 4K@30fps (via USB-C)
- **Screen Brightness:** 400 lumens
- **Bluetooth Remote Range:** Up to 33ft (10 meters)
- **Connectivity:** Dual USB-C cables (plug-and-play)
- **Magnetic Attachment:** N52 magnetic suction (MagSafe compatible)
- **Manufacturer:** TTQ
- **First Available:** January 14, 2025

## COMPATIBILITY

The TTQ Vlog Selfie Monitor Screen is compatible with a range of smartphones. Please ensure your device supports USB-C OTG functionality or DisplayPort alternate mode for full compatibility.

### Compatible Models Include:

- **iPhone:** iPhone 15, 16 series and above

- **Samsung Galaxy:** S21, 23, 24, 25 series, Z Fold 5, Note 20, etc.
- **Google Pixel:** 8, 9 series
- **OnePlus:** 9, 10, 12 series
- **Motorola:** Edge, Edge+ series

For additional supported models, please contact TTQ technical support.

## Side Button Usage Guide

Short press the side button to switch between three screen ratios



**1:1**

1:1 Ratio  
for perfect square  
reproduction.




**Reduced horizontal**

Reduced horizontal  
margins to fit  
display edges.




**Full screen**

Full-screen mode  
to maximize the  
selfie screen.



**MFB**

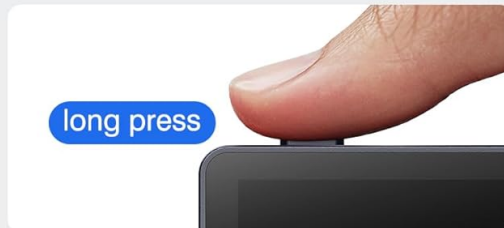

**long press**

\*Long press the side button to realize the screen mirroring and recovery functions.



Image: A detailed list of compatible phone models from various brands, emphasizing the requirement for USB-C OTG or DisplayPort alternate mode support.

## WARRANTY AND SUPPORT

For warranty information and technical support, please refer to the official TTQ website or contact their customer service. Additional user guides and manuals in PDF format are available for download from the product's Amazon page.

- User Guide (PDF): [Download User Guide](#)
- User Manual (PDF): [Download User Manual](#)

Related Documents - Vlog Selfie Monitor Screen

<div><div>TF39 Quick Operation Guide</div><div>(Please Before Use)</div><div>1.Model Compatibility Instructions</div><div><p>This device is compatible only with the following phone models:</p><p>USB-C interface devices: iPhone 12/13 series, Android phones that support OTG functionality, independent phone models</p><p>Incompatible devices: iPhone 14 and earlier models (Lightning interface), Android phones with non-USB-C interfaces</p></div><div><div>How to confirm your phone's interface type:</div><div>Check the charging port's shape.</div><div>At the top right of the interface, a USB-C interface, a lightning interface, and a Lightning interface</div></div><div><div>2.Device Connection and Settings</div><div>①Connect the device to your phone using the included data cable.</div><div>②Open Settings on your phone and ensure USB Debugging or OTG Mode is enabled.</div></div><div><div>3.Magnetic Attachment Instructions</div><div>①Align the back of the device with your phone's back cover, ensuring the magnetic strip faces the center.</div><div>②The magnetic attachment is complete. Check if your phone case is too thick or made of non-magnetic material.</div><div>③If the magnetic attachment fails, adjust the included magnets placed on your phone or case, then align the device with your phone.</div></div><div></div></div>	<p><a href="#">TF39 Quick Operation Guide - TTQ</a></p> <p>Concise guide for the TTQ TF39 Vlog Selfie Monitor Screen, covering compatibility, connection, magnetic attachment, and troubleshooting for iPhone and Android devices.</p>
<div></div>	<p><a href="#">TTQ TF39 User Manual: VLOG Mobile Screen Sharing Device Guide</a></p> <p>Comprehensive user manual for the TTQ TF39 VLOG Mobile screen sharing device. Learn about setup, features, usage guidelines, specifications, and contact information.</p>







#### [Magnetic Phone Vlog Selfie Screen User Manual - U40](#)

User manual for the U40 Magnetic Phone Vlog Selfie Screen by Shenzhen Hongxuan Health Intelligence Co., Ltd. Learn how to connect wirelessly or via USB-C to your iPhone or Android smartphone for vlogging and selfie monitoring. Includes specifications, features, and connection instructions.

Magnetic Phone Vlog Selfie Screen  
Product Manual



#### [Magnetic Phone Vlog Selfie Screen - ETG\\_X397 User Manual](#)

User manual for the ETG\_X397 Magnetic Phone Vlog Selfie Screen. Features a 3.97-inch screen, magnetic attachment, Bluetooth connectivity, and TYPE-C connection for easy selfie and video recording with smartphones.