Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

i O suite T187LP

iOsuite T187LP 20,000 mAh Power Bank

USER MANUAL

Introduction

Thank you for choosing the iOsuite T187LP 20,000 mAh High-Capacity Battery Pack. This compact and powerful device is designed to provide reliable and fast charging for a wide range of electronic devices, including smartphones, tablets, and smartwatches. With its integrated Type-C cable and multiple output ports, it offers convenience and versatility for users on the go.

This manual provides essential information on how to safely and effectively use, maintain, and troubleshoot your iOsuite T187LP power bank. Please read it thoroughly before use and retain it for future reference.

Safety Information

To ensure safe operation and prevent damage to the device or injury, please observe the following precautions:

- Do not expose the power bank to extreme temperatures (above 60°C/140°F or below 0°C/32°F), direct sunlight, or high humidity.
- Do not disassemble, modify, or attempt to repair the device. This will void the warranty and may cause damage or injury.
- Keep the power bank away from water, flammable liquids, and corrosive materials.
- Avoid dropping, hitting, or subjecting the device to strong impacts.
- Keep out of reach of children.
- Use only certified charging cables and adapters.
- Do not short-circuit the output ports.
- If the power bank swells, emits an odor, or becomes excessively hot during charging or use, discontinue use immediately and contact customer support.

Package Contents

Please check the package contents upon opening to ensure all items are present:

- iOsuite T187LP 20,000 mAh Power Bank (Grey)
- Integrated Type-C Charging Cable
- User Manual (this document)

Product Overview



Image: The iOsuite T187LP 20,000 mAh power bank in grey, featuring its compact design, integrated Type-C cable, and digital LED display.

The iOsuite T187LP power bank is equipped with the following key components:

- **Integrated Type-C Cable:** For convenient charging of Type-C devices and recharging the power bank itself.
- **USB-A Output Port:** For charging devices via a standard USB-A cable.
- **Type-C Output Port:** An additional Type-C port for charging devices.
- **Digital LED Display:** Shows the remaining battery percentage of the power bank.
- **Power Button:** Activates the LED display and initiates charging.



Image: An angled view of the grey iOsuite T187LP power bank with its integrated Type-C cable extended, showing the digital LED display indicating 100% charge.

Setup

Before first use, it is recommended to fully charge your iOsuite T187LP power bank.

1. **Charging the Power Bank:** Connect the integrated Type-C cable to a USB power adapter (not included) or a computer's USB port. The digital LED display will show the charging progress. When fully charged, it will display "100%".
2. Alternatively, use a separate Type-C to Type-C cable (not included) to charge the power bank via its dedicated Type-C input/output port.

Operating Instructions

The iOsuite T187LP power bank allows you to charge up to three devices simultaneously.

1. **Checking Battery Level:** Briefly press the power button to activate the digital LED display, which will show the remaining battery percentage.
2. **Charging Your Device:**
    - **Using the Integrated Type-C Cable:** Pull out the integrated Type-C cable and connect it directly to your Type-C compatible device.
    - **Using the USB-A Port:** Connect your device's USB-A charging cable to the USB-A output port on the power bank.
    - **Using the Additional Type-C Port:** Connect your device's Type-C charging cable to the dedicated Type-C output port on the power bank.
3. Charging will begin automatically. The power bank's intelligent protection system safeguards your devices against

short circuits, overheating, overcharging, over-voltage, and over-current.

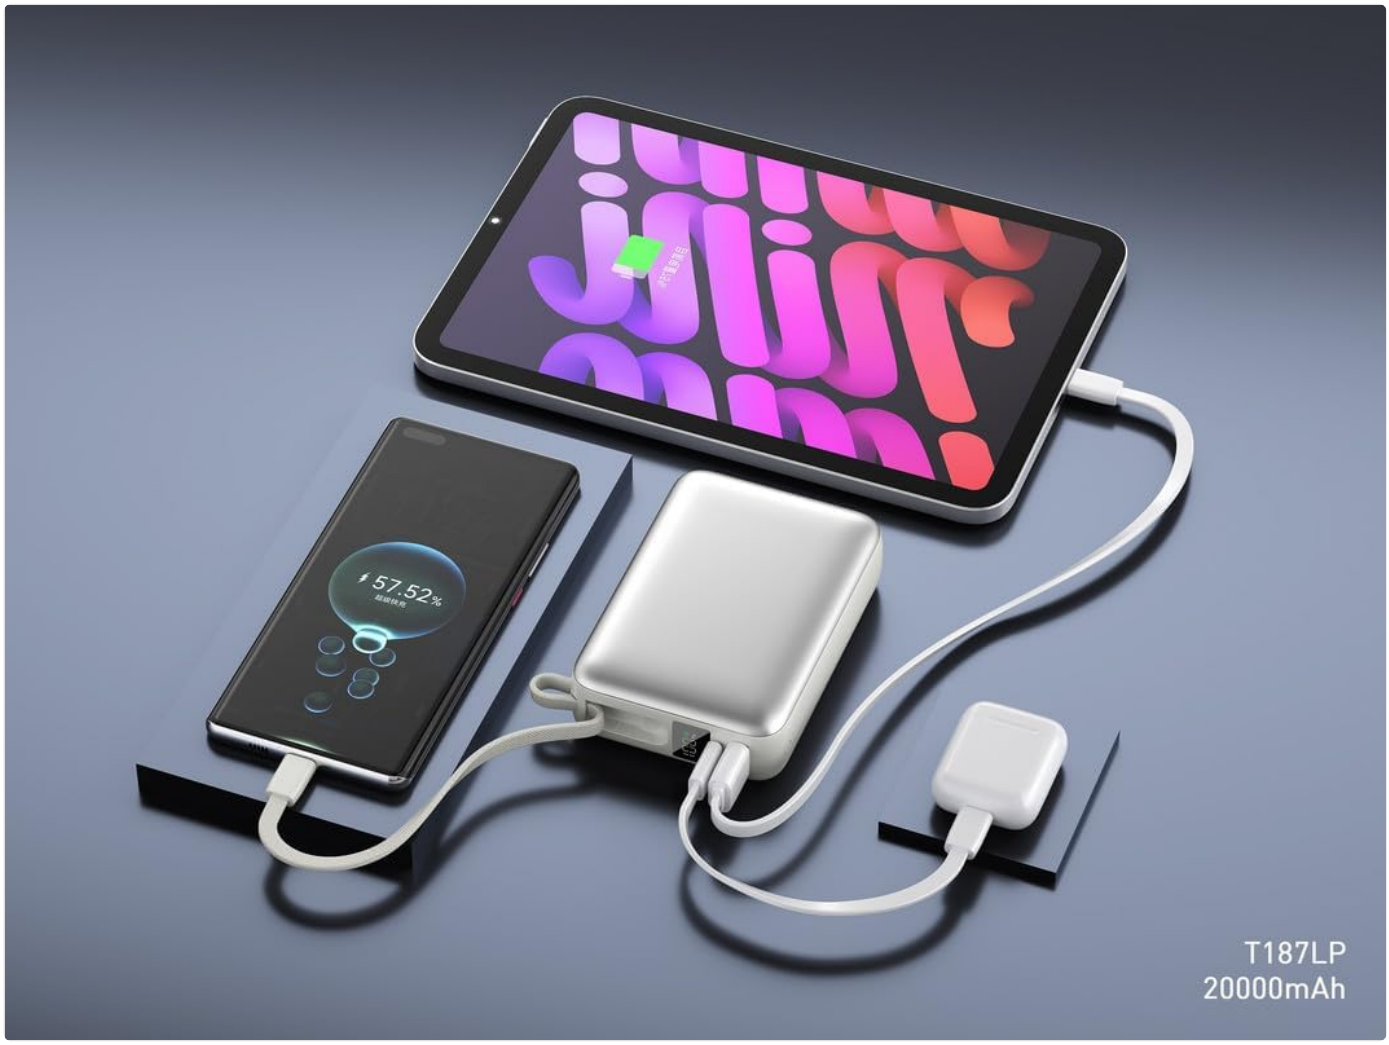


Image: A silver iOsuite T187LP power bank simultaneously charging a smartphone and a tablet, demonstrating its multi-device charging capability.

Maintenance

Proper maintenance will extend the lifespan of your power bank:

- **Cleaning:** Use a soft, dry cloth to clean the surface of the power bank. Do not use harsh chemicals or abrasive cleaners.
- **Storage:** Store the power bank in a cool, dry place away from direct sunlight and extreme temperatures. If storing for extended periods, charge the power bank to approximately 50% every three months to preserve battery health.
- **Battery Care:** Avoid fully discharging the power bank frequently, as this can reduce its overall lifespan.

Troubleshooting

If you encounter issues with your iOsuite T187LP power bank, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Power bank not charging	Charging cable or adapter faulty; loose connection; power bank fully discharged.	Try a different cable/adapter; ensure connections are secure; allow a few minutes for the power bank to respond if deeply discharged.

Problem	Possible Cause	Solution
Device not charging from power bank	Device cable faulty; power bank battery low; device not compatible; power bank in standby mode.	Try a different device cable; recharge the power bank; ensure device is compatible; press the power button on the power bank to activate output.
Slow charging	Cable resistance; device input limit; multiple devices charging simultaneously.	Use a high-quality, shorter cable; check device's charging specifications; try charging one device at a time for faster speed.
LED display not working	Power bank battery completely depleted; internal fault.	Charge the power bank for at least 30 minutes; if issue persists, contact customer support.

If the problem persists after trying these solutions, please contact customer support.

Specifications

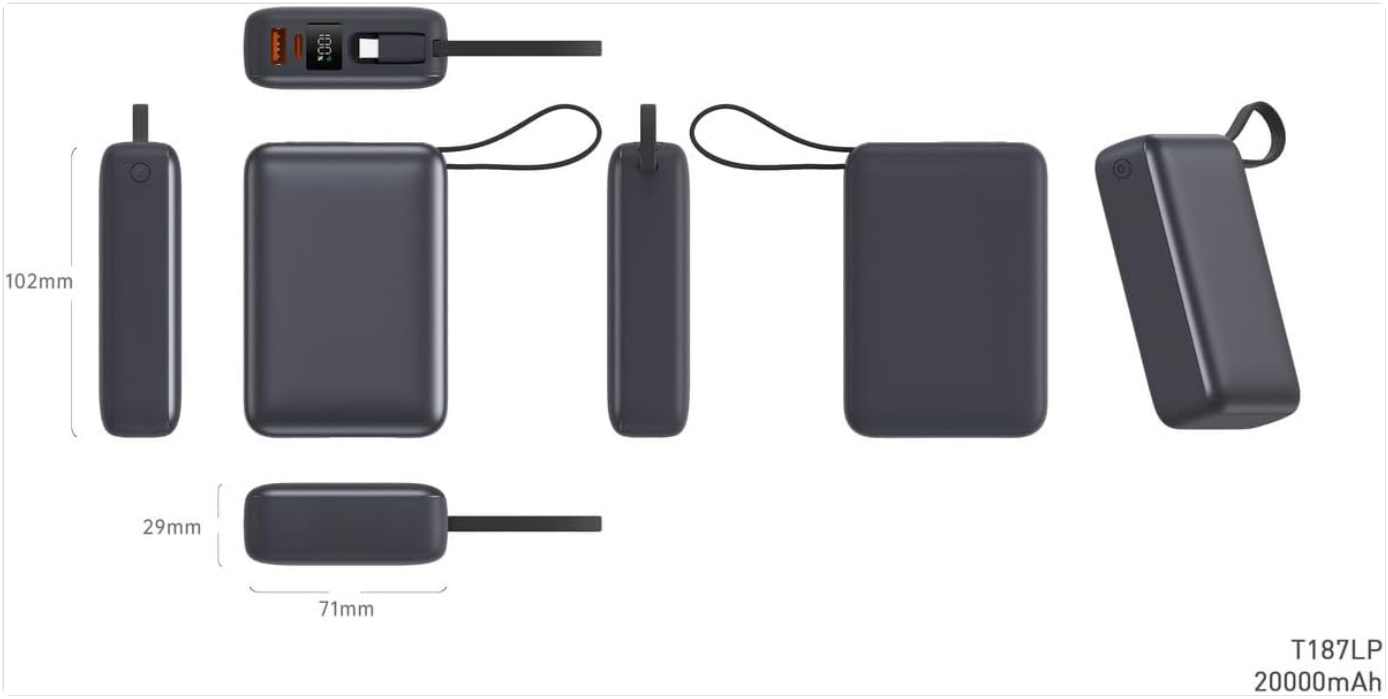


Image: A diagram illustrating the compact dimensions of the iOsuite T187LP power bank (102mm length, 71mm width, 29mm thickness) in comparison to a standard credit card.

Feature	Detail
Model	T187LP
Brand	i O suite
Battery Capacity	20,000 mAh
Color	Grey
Connector Type	USB (Integrated Type-C cable, USB-A port, Type-C port)
Number of Ports	3 (1x Integrated Type-C, 1x USB-A, 1x Type-C)

Feature	Detail
Special Features	Fast Charging (45W PD), Intelligent LED Display, Multi-device Charging
Product Dimensions	10.2L x 7.1W x 2.9Th centimeters
Compatible Devices	Fitness Band, Smartphone, Smartwatch, Tablet (iPhone Series, Samsung, Huawei, Xiaomi, Redmi, Vivo, Oppo, iPad, Apple Watch and More)
UPC	665654697046

Warranty and Support

The iOsuite T187LP power bank comes with a standard manufacturer's warranty. Please refer to the warranty card included in your product packaging for specific terms and conditions.

For technical support, warranty claims, or any other inquiries, please contact iOsuite customer service through the contact information provided on the product packaging or the official iOsuite website.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0DV5GK37Y

More documents and user manuals: **https://manuals.plus/**