**Saved from manuals.plus.**
**Open the live page for links to other documents and user manuals.**



## Ormeo Home ZM1901M

# Ormeo Home Cold Press Juicer ZM1901M Instruction Manual

Model: ZM1901M | Brand: Ormeo Home

## 1. Introduction

Thank you for choosing the Ormeo Home Cold Press Juicer ZM1901M. This manual provides essential information for the safe and efficient operation, assembly, cleaning, and maintenance of your new juicer. Please read these instructions thoroughly before first use and retain them for future reference.




Image 1.1: The Ormeo Home Cold Press Juicer ZM1901M, shown with a variety of fresh produce and prepared juice.

## 2. Important Safety Instructions

To reduce the risk of fire, electric shock, or injury, always follow basic safety precautions when using electrical appliances:

- Read all instructions before operating the juicer.
- Ensure the voltage indicated on the appliance corresponds to your local mains voltage before connecting.
- Do not immerse the motor base in water or other liquids.
- Unplug the juicer from the outlet when not in use, before assembling or disassembling parts, and before cleaning.
- Keep hands and utensils away from moving parts during operation to prevent injury.
- Do not operate any appliance with a damaged cord or plug, or after the appliance malfunctions or has been dropped or damaged in any manner.
- Ensure all parts are correctly assembled and the safety lock is engaged before turning on the juicer.
- This appliance is for household use only. Do not use outdoors.

## 3. Product Features

The Ormeo Home Cold Press Juicer ZM1901M is designed for efficient and nutrient-rich juicing with several key features:

- **5.0-inch Large Feed Chute:** Accommodates whole fruits and vegetables, reducing preparation time.
- **Slow Cold Press Technology (50 RPM):** Minimizes heat buildup and oxidation, preserving nutrients and natural flavors.
- **Dual Strainers:** Features a 0.8mm fast filtration mesh and a 0.3mm fine filtration mesh for effective pulp separation and up to 98% juice purity.
- **Easy Assembly and Cleaning:** Designed with a simple, three-component assembly and parts that are easy to rinse.
- **Quiet 200W Motor:** Operates efficiently with minimal noise.
- **Automatic Safety Sensor:** Stops operation if the lid is opened during use.




Image 3.1: The 5.0-inch extra-large feed chute allows for whole fruits and vegetables, simplifying preparation.




Image 3.2: The dual-layer filter system ensures optimal juice purity by separating pulp effectively.

## 4. Setup and Assembly

Follow these steps to assemble your Ormeo Home Cold Press Juicer:

1. Place the motor base on a stable, flat surface.
2. Align the juicer cup with the motor base and gently press down until it locks into place.
3. Insert the auger (screw) into the center of the juicer cup.
4. Place the feed chute assembly onto the juicer cup, ensuring the handle aligns precisely with the ON/OFF button on the motor base. Rotate until it clicks securely.




Image 4.1: Step-by-step assembly guide for the juicer components.

## 5. Operating Instructions

Before juicing, ensure the appliance is correctly assembled and plugged into a suitable power outlet.

### 5.1 Ingredient Preparation

- Wash all fruits and vegetables thoroughly.
- For ingredients that do not fit the 5.0-inch feed chute, cut them into smaller pieces.
- Remove hard pits from fruits like peaches, plums, and cherries.
- Peel citrus fruits (oranges, lemons, grapefruits) to avoid bitter taste.

### 5.2 Juicing Process

1. Place a juice collection cup under the juice spout and a pulp collection cup under the pulp spout.
2. Turn the juicer ON by sliding the switch to the 'ON' position.
3. Gradually feed prepared ingredients into the feed chute. Use the food pusher if necessary, but do not force ingredients.
4. The juicer will extract juice and separate pulp into their respective containers.
5. If ingredients become jammed, slide the switch to the 'R' (Reverse) position for a few seconds to clear the blockage, then return to 'ON'.
6. After juicing, slide the switch to 'OFF' and unplug the appliance.




Image 5.1: The simple one-button operation for ON, OFF, and Reverse functions.

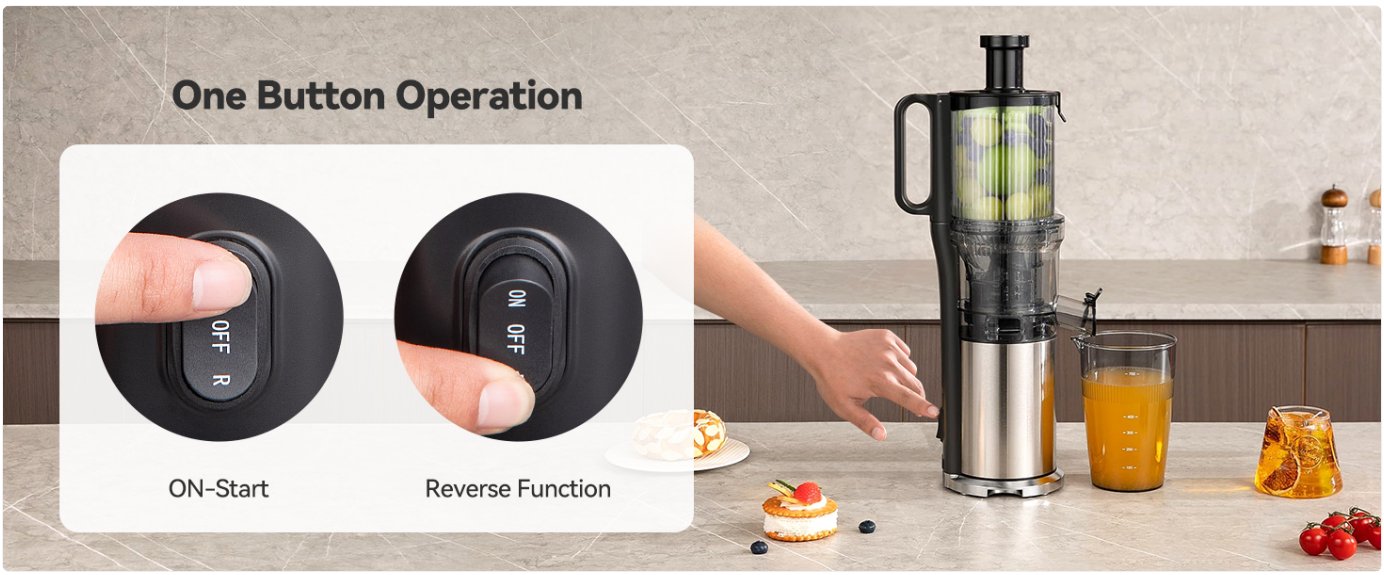



Image 5.2: The automatic safety sensor ensures the juicer stops if the lid is not securely closed.

## 6. Cleaning and Maintenance

Regular cleaning ensures optimal performance and longevity of your juicer.

### 6.1 Disassembly for Cleaning

1. Ensure the juicer is turned OFF and unplugged.
2. Remove the feed chute assembly by rotating it counter-clockwise.
3. Lift out the auger and then the juicer cup.
4. Separate the filter components from the juicer cup.

### 6.2 Washing Instructions

- All removable parts (juicer cup, auger, feed chute, filters) should be hand washed only. Do not place them in a dishwasher.
- Rinse parts immediately after use under running water to prevent pulp from drying and sticking.
- Use the provided cleaning brush to remove any stubborn pulp from the filter mesh.
- Wipe the motor base with a damp cloth. Never immerse the motor base in water.
- Dry all parts thoroughly before reassembling or storing.



Image 6.1: Rinsing juicer parts under water for quick and easy cleaning.

## 7. Troubleshooting Guide

If you encounter issues with your juicer, refer to the following common problems and solutions:

| Problem | Possible Cause | Solution |
|---|---|---|
| Juicer does not turn on. | Not plugged in; parts not assembled correctly; safety lock not engaged. | Ensure power cord is securely plugged in. Verify all components are correctly assembled and the handle aligns with the ON/OFF button. Close the lid securely to engage the safety lock. |
| Juicer stops during operation. | Lid opened; motor overloaded/jammed. | Ensure the lid is closed. If jammed, switch to 'R' (Reverse) for a few seconds to clear the blockage, then switch back to 'ON'. If motor overheats, allow it to cool down for 30 minutes before restarting. |
| Low juice yield or wet pulp. | Ingredients fed too quickly; certain types of produce. | Feed ingredients slowly and steadily. Some softer fruits naturally yield wetter pulp. Ensure filters are clean and not clogged. |

| Problem | Possible Cause | Solution |
|---|---|---|
| Excessive vibration or noise. | Parts not assembled correctly; hard ingredients. | Check that all components are securely locked in place. Avoid feeding excessively hard ingredients or large pieces that strain the motor. |

## 8. Specifications

| Feature | Detail |
|---|---|
| Brand | Ormeo Home |
| Model Name | ZM1901M |
| Color | Black |
| Product Dimensions | 5.9"D x 6.97"W x 16.34"H |
| Item Weight | 5.6 pounds |
| Maximum Power | 200 Watts |
| Voltage | 120V |
| Special Features | Easy to Clean, Overheat Protection, Powerful Motor, Quiet Motor, Whole Fruit Processing |
| Recommended Uses | Beetroot, Carrot, Celery, Cucumber, Grapes, Green apple, Kiwi fruit, Oranges, Pineapple, Watermelon |
| Product Care Instructions | Hand Wash Only |




Image 8.1: Dimensions of the Ormeo Home Cold Press Juicer ZM1901M.

## 9. Warranty and Support

Your Ormeo Home Cold Press Juicer ZM1901M includes a one-year manufacturer warranty. This warranty covers defects in materials and workmanship under normal household use from the date of purchase. For warranty claims or technical support, please contact Ormeo Home customer service. Please retain your proof of purchase for warranty validation.

© 2025 Ormeo Home. All rights reserved.

### Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

**Name**

Anonymous

**Email**

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

**Question**

Example: How do I reset this device or fix this error?

**Details**

Model number, symptoms, what you tried, or the section of the manual you are using.

**Submit question**

---

**Open the live page**

**https://manuals.plus/asin/B0DWMCH3J9**

More documents and user manuals: **https://manuals.plus/**