

[Manuals.plus](#) /

> [OMOTON](#) /

> OMOTON Bluetooth Keyboard for Mac, Multi-Device Rechargeable Wireless Keyboard, AZERTY French Layout

OMOTON B0DX1VTYGQ

OMOTON Bluetooth Keyboard for Mac (Model: B0DX1VTYGQ)

Multi-Device Rechargeable Wireless Keyboard with AZERTY French Layout

INTRODUCTION

Thank you for choosing the OMOTON Bluetooth Keyboard. This wireless keyboard is specifically designed for Mac OS devices, including Mac Pro, Mac Mini, iMac, iMac Pro, MacBook Pro, and MacBook Air. It offers multi-device connectivity, a built-in rechargeable battery, and an ergonomic design for comfortable typing. Please read this manual carefully to ensure proper use and optimal performance of your keyboard.



Image: OMOTON Bluetooth Keyboard, a full-size keyboard with a numeric keypad, designed for Mac devices.

PACKAGE CONTENTS

Please check the package contents upon unboxing:

- OMOTON Bluetooth Keyboard
- USB Charging Cable
- User Manual (this document)

SETUP

1. Powering On/Off

Locate the power switch on the keyboard. Slide the switch to the **ON** position to turn on the keyboard. Slide it to the **OFF** position to turn it off when not in use to conserve battery.

2. Charging the Keyboard

The keyboard features a built-in rechargeable lithium battery. Use the included USB charging cable to charge the keyboard. Connect one end of the cable to the keyboard's Type-C charging port and the other end to a USB

power source (e.g., computer USB port, USB wall adapter).

- A full charge typically takes 2-3 hours.
- The charging indicator light will show the charging status.



Image: The OMOTON keyboard connected via its Type-C charging port, illustrating the charging process and battery life.

3. Bluetooth Pairing (Multi-Device)

This keyboard supports connection to up to three Bluetooth devices. Follow these steps to pair your keyboard:

1. Ensure the keyboard is powered on.
2. On your Mac device, go to **System Settings** (or **System Preferences**) > **Bluetooth** and turn Bluetooth **On**.
3. To pair with the first device, **long press** the **Fn + BT1** keys for a few seconds until the BT1 indicator light starts blinking blue. This indicates the keyboard is in pairing mode.
4. On your Mac device, look for "OMOTON Keyboard" in the list of available Bluetooth devices and click to connect. The BT1 indicator will stop blinking once successfully paired.
5. To pair with a second device, repeat steps 3 and 4, but **long press Fn + BT2**.
6. To pair with a third device, repeat steps 3 and 4, but **long press Fn + BT3**.



1 Faire glisser l'interrupteur OFF-ON



2 Activez la fonction Bluetooth sur votre appareil Mac



3 Appuyez sur « Fn + BT1 » pendant quelques secondes, et la LED commence à clignoter en bleu pour entrer dans le mode d'appairage



4 Sélectionnez « OMOTON Keyboard » sur votre appareil Mac pour terminer l'appairage



Connexion Bluetooth

Image: Visual guide showing the steps to connect the OMOTON keyboard via Bluetooth, including turning on the keyboard, activating Bluetooth on Mac, and selecting the keyboard for pairing.


Saisie Confortable

Offre une expérience de frappe confortable et précise



Amélioration des
clés de ciseaux

vs



Clés générales



Image: Diagram illustrating the OMOTON keyboard's ability to connect simultaneously to three different devices (laptop, desktop, tablet) via Bluetooth channels BT1, BT2, and BT3.

OPERATION

1. Switching Between Devices

Once paired with multiple devices, you can easily switch between them by **short pressing** the **Fn + BT1**, **Fn + BT2**, or **Fn + BT3** keys. The corresponding indicator light will illuminate to show which device is currently active.

2. Using Multimedia Shortcuts


The keyboard features 12 Mac OS multimedia shortcuts for enhanced productivity. These function keys (F1-F12) provide quick access to various system functions. To use them, simply press the desired function key.

- **F1:** Decrease brightness
- **F2:** Increase brightness
- **F3:** Open Mission Control
- **F4:** Open Launchpad
- **F5:** Search
- **F6:** Voice Dictation
- **F7:** Previous Track
- **F8:** Play/Pause

- **F9:** Next Track
- **F10:** Mute
- **F11:** Decrease Volume
- **F12:** Increase Volume

Touches Multimédias Optimisées

Toutes les touches de fonction sont conçues pour la dernière version de Mac OS

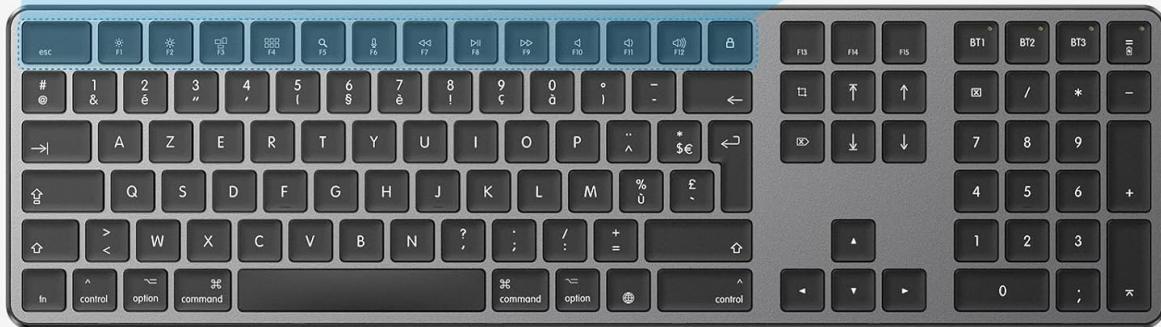

- | | |
|---|--------------------------------|
| F1 Diminuer la luminosité | F7 Piste précédente |
| F2 Augmenter la luminosité | F8 Lecture/Pause |
| F3 Ouvrir le contrôle de mission | F9 Piste suivante |
| F4 Ouvrir le Launchpad | F10 Sourdine |
| F5 Recherche | F11 Diminuer le volume |
| F6 Dictée Vocale | F12 Augmenter le volume |

Image: Detailed view of the OMOTON keyboard's multimedia function keys (F1-F12) and their corresponding Mac OS actions, such as brightness control, media playback, and volume adjustment.

3. Ergonomic Design

The keyboard is designed with an ergonomic tilt angle and features non-slip rubber pads to reduce wrist fatigue during prolonged typing sessions. The scissor-switch keys provide a quiet, soft, and comfortable typing experience with pleasant tactile feedback.



Image: Illustration comparing the scissor-key mechanism of the OMOTON keyboard with general keys, highlighting the improved comfort and precision for typing.

MAINTENANCE

1. Cleaning

To clean your keyboard, first ensure it is powered off. Use a soft, lint-free cloth slightly dampened with water or a mild cleaning solution. Avoid using harsh chemicals, abrasives, or excessive moisture, as these can damage the keyboard.

2. Battery Information

The keyboard contains a non-removable rechargeable lithium battery. Do not attempt to replace the battery yourself. For optimal battery life, avoid fully discharging the keyboard frequently and store it in a cool, dry place when not in use for extended periods.

TROUBLESHOOTING

Keyboard Not Connecting via Bluetooth

- **Check Power:** Ensure the keyboard is powered on and has sufficient battery charge.

- **Re-pair:** Delete the keyboard from your Mac's Bluetooth device list and attempt to re-pair it following the steps in the "Bluetooth Pairing" section.
- **Bluetooth On:** Verify that Bluetooth is enabled on your Mac device.
- **Distance:** Ensure the keyboard is within the effective range of your Mac (typically up to 10 meters or 33 feet).
- **Interference:** Move away from other wireless devices that might cause interference.

Keys Not Responding

- **Battery Level:** Check if the keyboard battery is low and recharge it if necessary.
- **Connection:** Ensure the Bluetooth connection is stable. Try switching to another paired device and back, or re-pairing.
- **Restart:** Turn the keyboard off and then on again. Restart your Mac device.

SPECIFICATIONS

Brand	OMOTON
Model	B0DX1VTYGQ
Connectivity Technology	Bluetooth
Compatible Devices	Mac, Mac Pro, Mac Mini, iMac, iMac Pro, MacBook Pro, MacBook Air, and other Mac OS devices.
Keyboard Layout	AZERTY (French Layout)
Number of Keys	111
Special Features	Rechargeable, Silent Keys, Multimedia Shortcuts
Power Source	Battery Powered (Rechargeable)
Material	Plastic
Color	Grey
Included Components	USB Cable

Clavier Complet et Ultra-mince



Image: Technical drawing showing the dimensions of the OMOTON keyboard: 434.5mm (17.1in) length and 121mm (4.8in) width, with a thickness of 21.9mm (0.9in).

WARRANTY AND SUPPORT

OMOTON products come with a standard warranty. For detailed warranty information, technical support, or any inquiries regarding your product, please refer to the warranty card included in your package or visit the official OMOTON website. You may also contact OMOTON customer service directly through the retailer where you purchased the product.