

[manuals.plus](#) /› [KEFEYA](#) /› **KEFEYA 15.6" Laptop Screen Extender (Model S5) Instruction Manual****KEFEYA S5**

KEFEYA 15.6" Laptop Screen Extender (Model S5) Instruction Manual

Model: S5

[Setup](#) [Operating](#) [Maintenance](#) [Troubleshooting](#) [Specifications](#) [Warranty & Support](#)

1. SETUP

1.1 Package Contents

The KEFEYA 15.6" Laptop Screen Extender package includes the following items:



- 1x S5 Monitor
- 1x User Manual
- 1x Quick Guide
- 2x USB-C to USB-C Cable
- 1x HDMI to USB-C Cable
- 1x Type-C to USB-A Cable
- 1x Carry Bag
- 1x H5 Adapter
- 1x Power Bank

Use the Connection Mode After H5 Adapter




HDMI & H5 adapter

Ensure your laptop has a USB-A port (or a standard USB-C port) and an HDMI port. Please use a H5 adapter along with an HDMI cable for the connection.

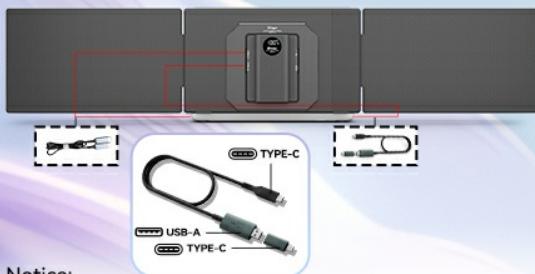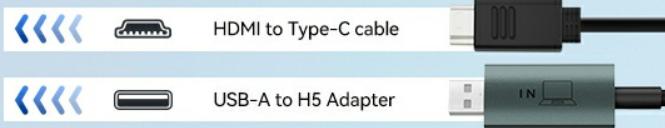

Full-Functioned Type-C & H5 adapter

This connection mode applies to the MacBook M1/M2/M3/M4 chips



Notice:

- 1.The above 4 connection methods all need to place the power bank equipped with the extended screen.
- 2.If the display has no signal or the signal is unstable after connection, please connect an external 5V/2A power adapter to power the laptop.

Image: All components included in the KEFEYA S5 package, neatly organized.

1.2 Attaching the Power Bank

The included 10,000mAh power bank magnetically attaches to the back of the monitor unit. This provides untethered power for 5-6 hours, reducing laptop battery drain.

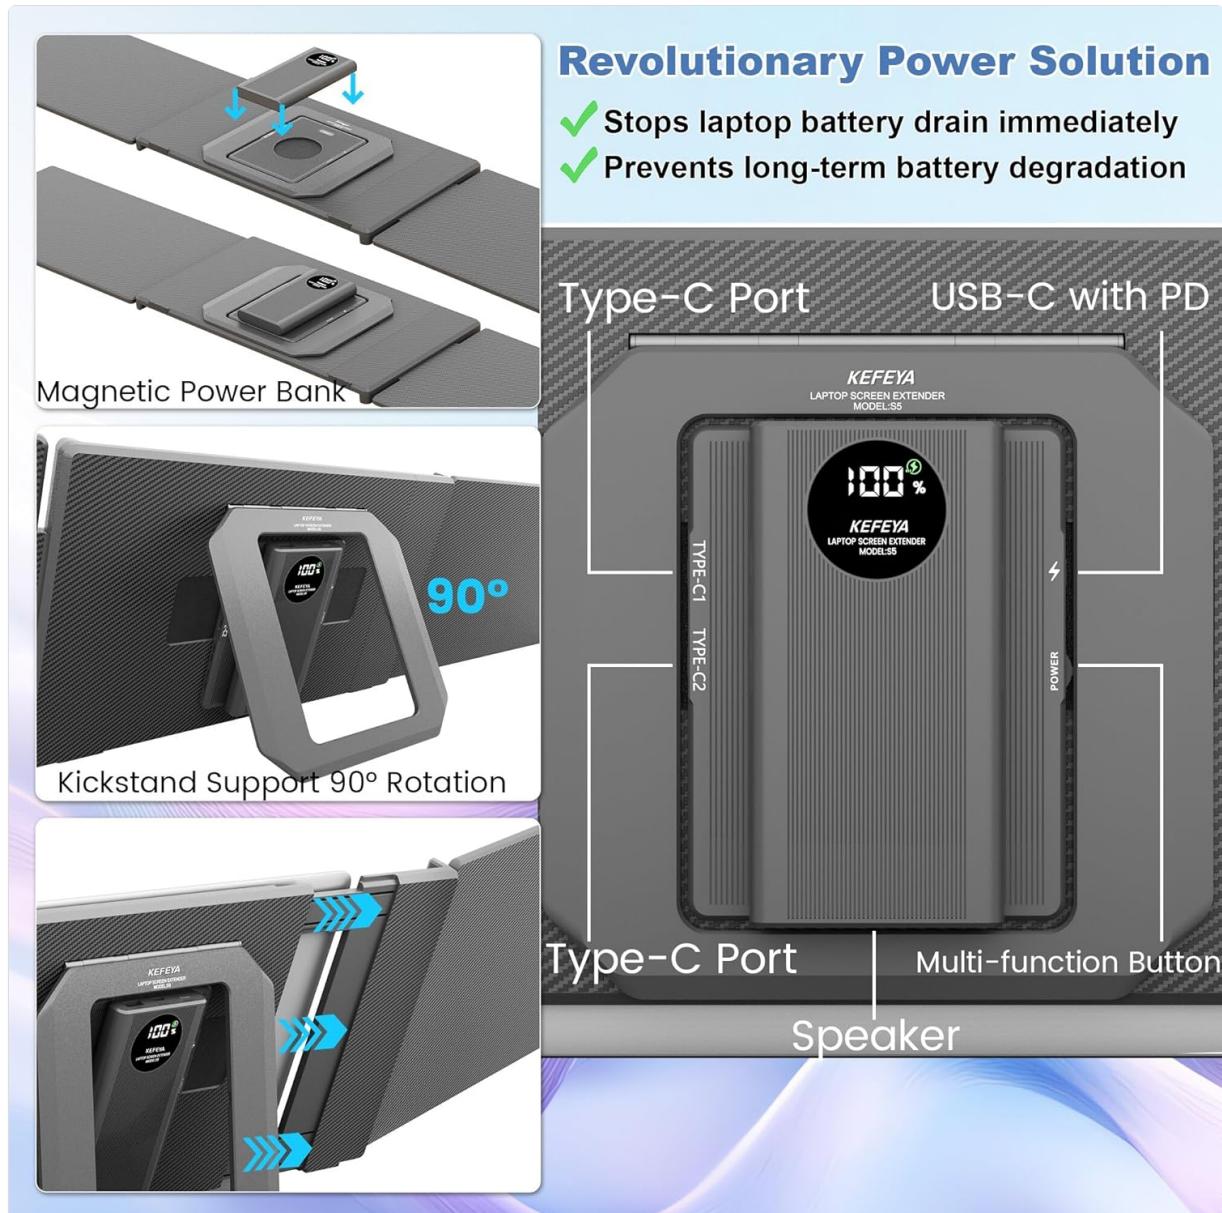


Image: Close-up of the magnetic power bank attaching to the monitor's kickstand.

1.3 Connecting to Your Laptop

The KEFEYA S5 offers versatile connectivity options to ensure compatibility with various laptops (13-17 inches). The plug-and-play functionality typically requires only two connections.

Connection Mode

Option 1: Full-Functioned Type-C *2

Laptop port



Ensure your laptop has 2 full-functioned Type-C ports, and the type-C port can provide video signal.



Option 2: Full-Functioned Type-C & HDMI

Laptop port



Ensure your laptop has 1 HDMI port and 1 full-functioned Type-C.



Option 3: HDMI & USB-A

Laptop port



Ensure your laptop has a USB-A port (or a standard USB-C port) and an HDMI port. Please use a H5 adapter along with an HDMI cable for the connection.



Notice:

The above connection methods all need to place the power bank equipped with the extended screen.

Image: Diagram illustrating three connection options for laptops: Full-Functioned Type-C x2, Full-Functioned Type-C & HDMI, and HDMI & USB-A.

- **Option 1: Full-Functioned Type-C x2**

Ensure your laptop has two full-functioned Type-C ports that can provide video signal. Use the provided USB-C to USB-C cables.

- **Option 2: Full-Functioned Type-C & HDMI**

If your laptop has one HDMI port and one full-functioned Type-C port, use the HDMI to USB-C cable and one USB-C to USB-C cable.

- **Option 3: HDMI & USB-A**

For laptops with a USB-A port (or a standard USB-C port for power only) and an HDMI port, use the included H5 adapter along with an HDMI cable for video transmission and a USB-C to USB-A cable for power.

Important Note: If you encounter a "No Signal" error, it means your USB-C port is for power only. In this case, use the included H5 adapter cable to transmit video. This is a common solution for MacBooks and some ultrabooks.

Video: A demonstration of the KEFEYA S5 Laptop Screen Extender setup and functionality, including cable connections and display modes.

1.4 Initial Power On

Once connected, press the power button on the monitor unit to turn it on. The power bank will display its charge level. The screens should automatically detect the input signal.

2. OPERATING INSTRUCTIONS

2.1 Display Modes

The KEFEYA S5 supports three primary display modes:

- **Extended Mode:** Expands your desktop across all three screens, providing maximum workspace.
- **Duplicated Mode:** Mirrors your main laptop screen onto the extender screens.
- **Mirrored Mode:** Displays the same content on all screens.

The sturdy build allows for smooth 180° rotation, enabling portrait or landscape viewing for various tasks.

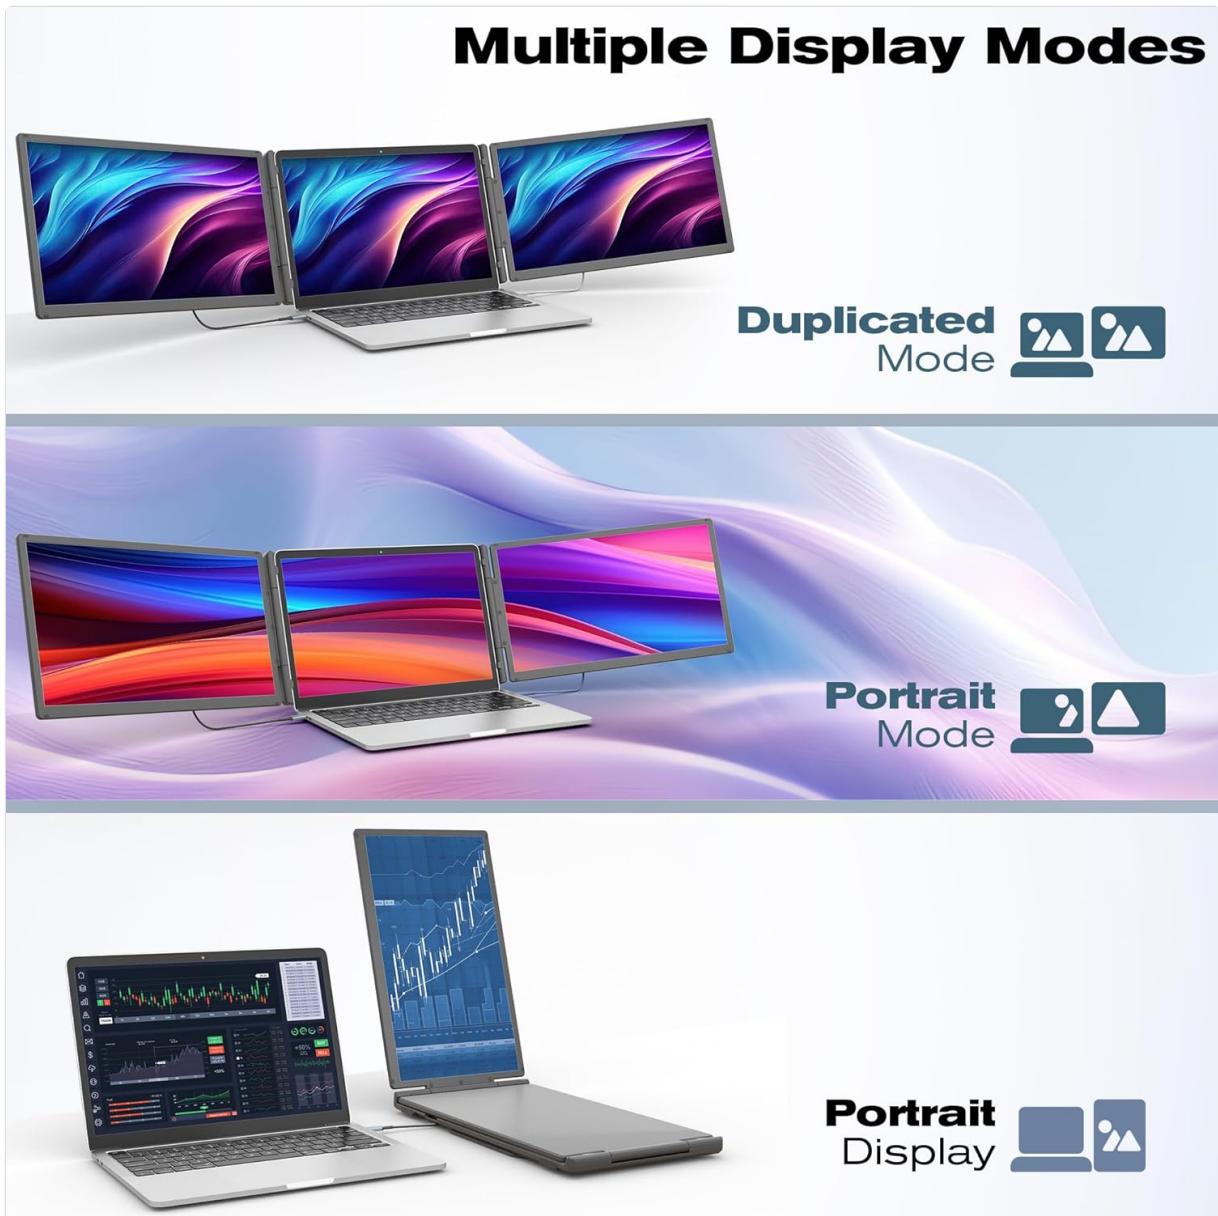


Image: Visual representation of the three display modes: Duplicated, Portrait, and Extended.

2.2 Adjusting Brightness and Volume

Use the multi-function button/toggle wheel on the monitor unit to adjust brightness, contrast, backlight, sharpness, and ECO settings. You can also control the built-in speaker volume.

ADJUSTABLE BRIGHTNESS & VOLUME



Image: Screenshot of the on-screen display (OSD) menu for adjusting display settings and volume.

2.3 Universal Compatibility

The KEFEYA S5 is broadly compatible with various operating systems and devices, including macOS, Windows, Android, PS5, Xbox, and Switch. This allows for a centralized workspace for multiple devices.

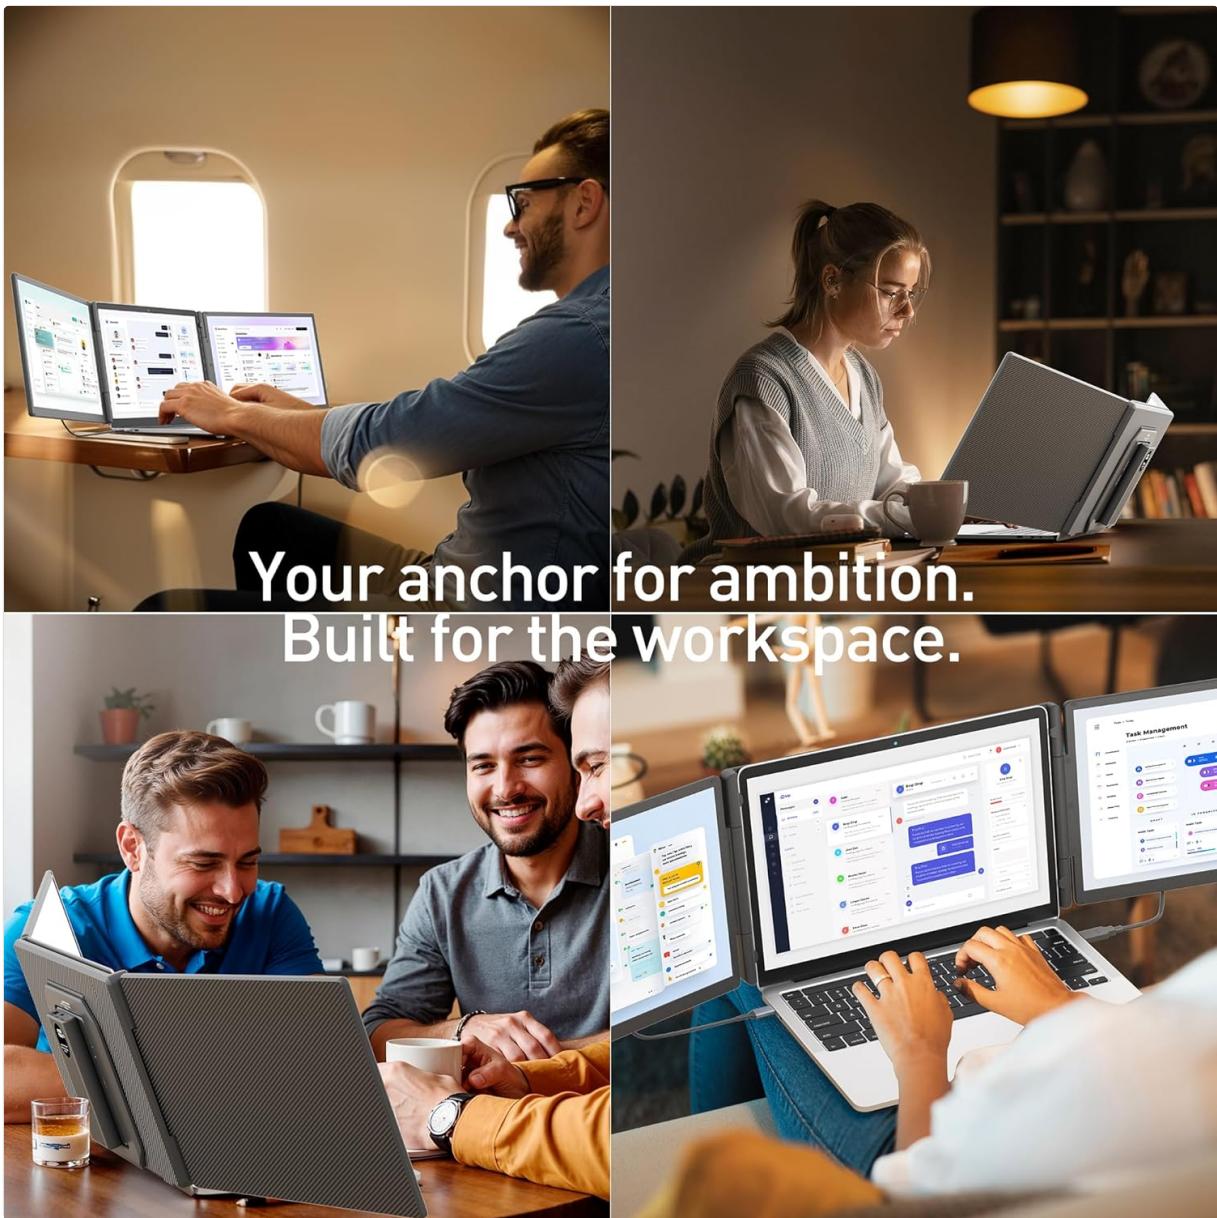


Image: A user playing a game with the triple screen setup, illustrating compatibility with various devices and operating systems.

3. MAINTENANCE

3.1 General Care

To ensure the longevity of your screen extender, keep it clean and handle it with care. Use a soft, dry cloth for cleaning. Avoid harsh chemicals or abrasive materials. Store the unit in its carry bag when not in use to protect it from dust and scratches.

3.2 Power Bank Care

To maximize the lifespan of the 10,000mAh power bank, avoid fully discharging it regularly. Recharge it when the charge level is low. Store in a cool, dry place away from extreme temperatures.

4. TROUBLESHOOTING

4.1 No Signal Error

If you encounter a "No Signal" error, it typically indicates that your laptop's USB-C port is for power delivery only and does not transmit video. In this scenario, use the included H5 adapter cable to transmit the video signal from your laptop's HDMI or USB-A port.

4.2 Display Issues

If the display has no signal or the signal is unstable after connection, please connect an external 5V/2A power adapter to power the laptop. Ensure all cables are securely connected.

4.3 Audio Quality

While the KEFEYA S5 includes built-in speakers, for optimal audio experience, it is recommended to use your laptop's speakers or external audio devices.

5. SPECIFICATIONS

Model Number	S5
Screen Size	15.6 Inches
Resolution	1920 x 1080 Pixels (FHD 1080p)
Aspect Ratio	16:9
Screen Surface	Glossy
Product Dimensions	16.93 x 10.24 x 2.36 inches
Item Weight	9.42 pounds
Power Bank Capacity	10,000mAh (37Wh)
Total USB Ports	1 (on power bank)
Manufacturer	Shenzhen Baijiayoupu Technology Co., Ltd.

6. WARRANTY & SUPPORT

6.1 Warranty Information

Please refer to the product packaging or the included user manual for specific warranty details provided by KEFEYA.

6.2 Customer Support

KEFEYA offers 24/7 expert support for any questions regarding compatibility, setup, or missing parts. For assistance, please refer to the contact information provided in the product box or user manual.