



[Manuals.plus](#) /

> [UseeLink](#) /

> UseeLink Matter Smart Power Strip (Model G-MT-301U-2A2C-B) Instruction Manual

UseeLink G-MT-301U-2A2C-B

UseeLink Matter Smart Power Strip Instruction Manual

Model: G-MT-301U-2A2C-B

[Overview](#) [Setup](#) [Operation](#) [Safety](#) [Introduction](#) [Product](#) [Specifications](#) [Troubleshooting](#) [Maintenance](#) [Warranty & Support](#)

1. INTRODUCTION

This manual provides detailed instructions for the UseeLink Matter Smart Power Strip, Model G-MT-301U-2A2C-B. This device is designed to offer smart control over your electronic appliances, integrating seamlessly with various smart home ecosystems. Please read this manual thoroughly before use to ensure proper installation and operation.



Image 1.1: UseeLink Matter Smart Power Strip, Black model.

2. PRODUCT OVERVIEW

The UseeLink Matter Smart Power Strip is a versatile power solution featuring smart control capabilities. It includes multiple outlets and USB ports for charging various devices.

2.1 Key Features

- **Matter Compatibility:** Works with Apple Home, Amazon Alexa, Google Home, and SmartThings, allowing control from a single app.
- **Smart Outlets:** Four individually controlled AC outlets.
- **Fast Charging Ports:** Two USB-A and two USB-C ports, controlled as a single unit.
- **Voice Control:** Compatible with Amazon Alexa, Google Assistant, and Siri for hands-free operation.
- **Scheduling & Timer:** Set schedules to automatically turn devices on/off, optimizing energy use.
- **Safety Protection:** Built-in safeguards against over-heat, over-charge, over-current, and short circuits.
- **High Power Capacity:** Supports a maximum current of 16A and a maximum power of 3500W (for short-term use).

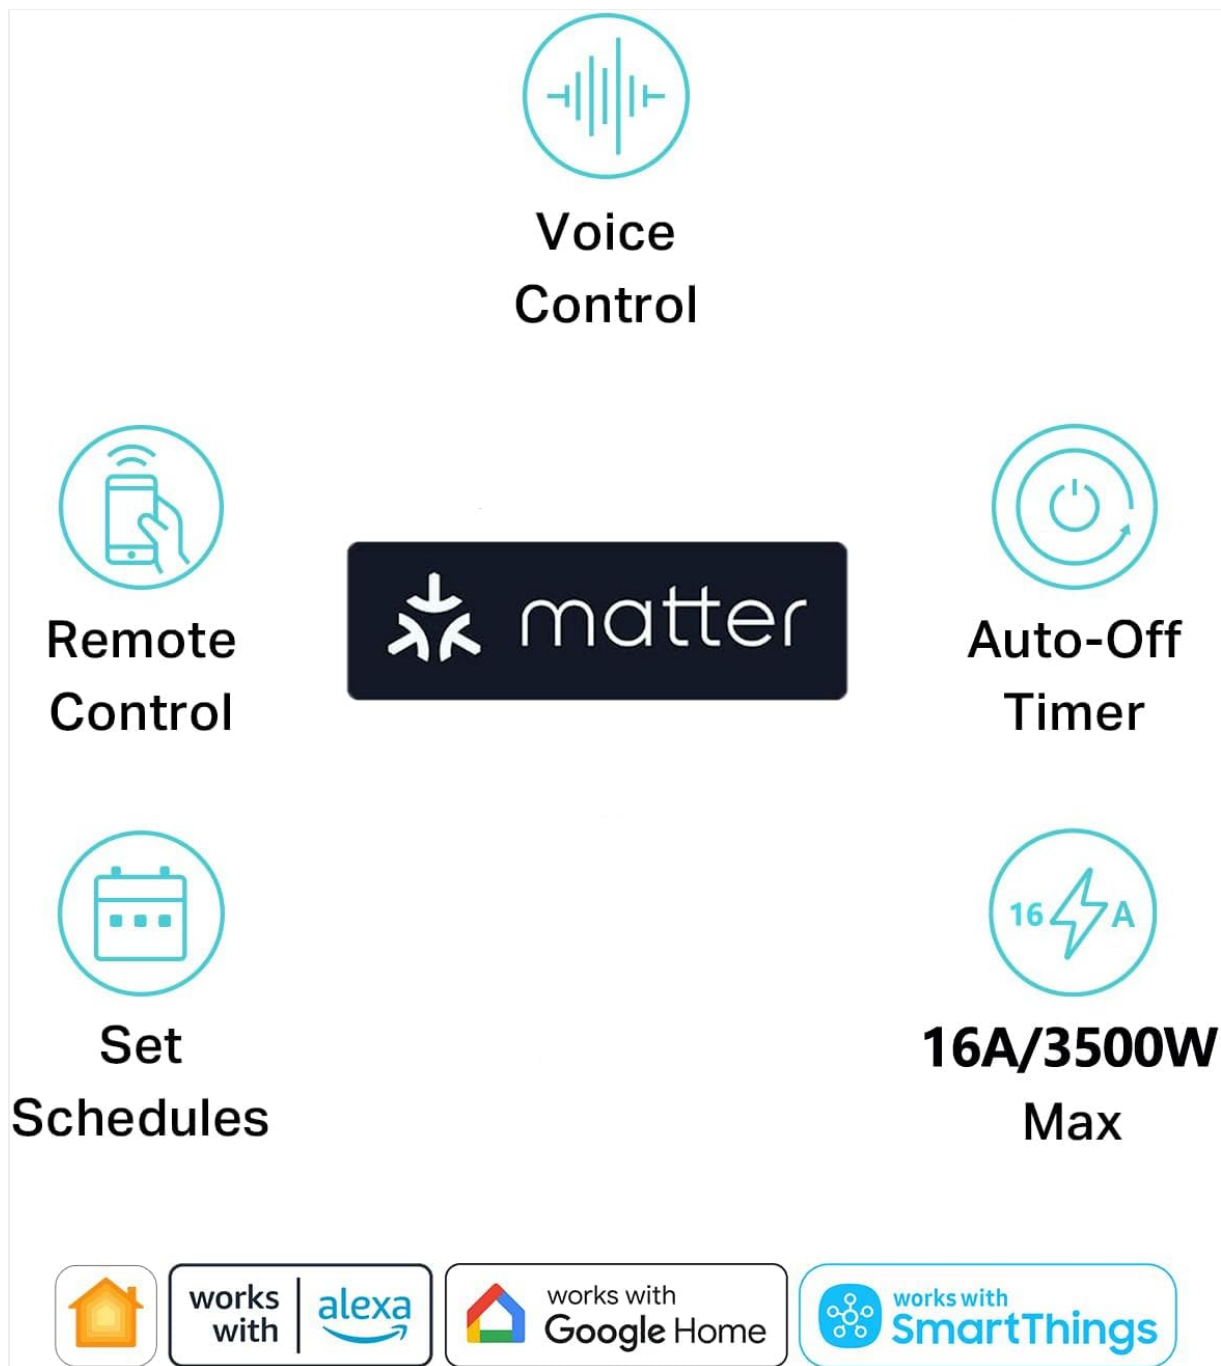


Image 2.1: Overview of the smart features including voice control, remote control, auto-off timer, scheduling, and Matter compatibility.

2.2 Product Components

The power strip features:

- 4 x AC Outlets (individually controllable)
- 2 x USB-A Ports (controlled as a unit)
- 2 x USB-C Ports (controlled as a unit)
- 1 x Power Button (also used for pairing)
- 1 x Power Cord (1.5 meters in length)

Product Size



Image 2.2: Close-up view of the power strip's USB-A and USB-C ports, indicating PD20W fast charging capabilities.

3. SETUP INSTRUCTIONS

To set up your UseeLink Matter Smart Power Strip, follow these steps:

1. **Power On:** Plug the smart power strip into a standard wall outlet. The blue ring light around the power button will illuminate.
2. **Download App:** Ensure you have a Matter-compatible smart home app installed on your smartphone or tablet (e.g., Apple Home, Google Home, Amazon Alexa app).
3. **Enable Pairing Mode:** Press and hold the power button on the power strip for approximately 5-10 seconds until the blue light begins flashing. This indicates the device is in pairing mode.
4. **Scan QR Code:** Open your chosen smart home app. Select the option to "Add Accessory" or "Add Device." Use your device's camera to scan the Matter QR code located on the bottom of the power strip or on its packaging.
5. **Connect to Wi-Fi:** The app will prompt you to select your 2.4GHz Wi-Fi network and enter the password. *Note: This device requires a 2.4GHz Wi-Fi network and a Matter certified hub (e.g., Apple TV, HomePod, compatible Alexa or Google device) for full functionality.*
6. **Complete Setup:** Follow the on-screen instructions in the app to name your power strip and its individual outlets. You can label each AC outlet separately. The USB ports will be controlled as a

single unit.

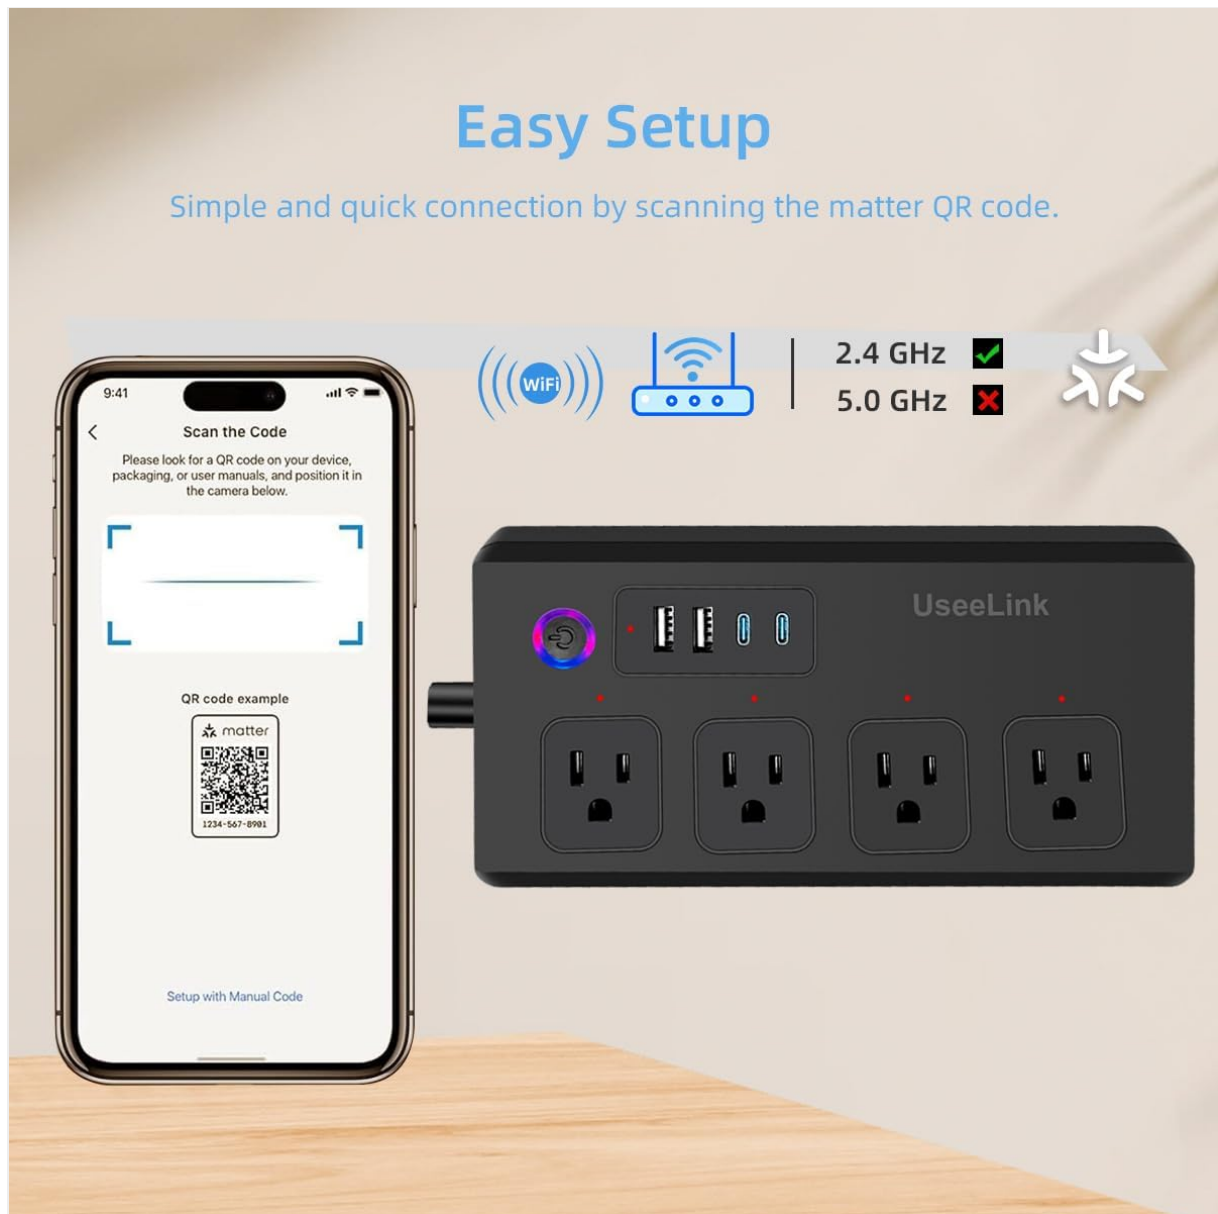


Image 3.1: Illustration of the easy setup process by scanning the Matter QR code. Requires 2.4 GHz Wi-Fi. For more information on Matter technology, visit the [Connectivity Standards Alliance website](#).

4. OPERATING INSTRUCTIONS

4.1 Voice Control

Once connected to your smart home ecosystem, you can control the power strip using voice commands through Amazon Alexa, Google Assistant, or Siri.

- **Example Commands:**
 - "Alexa, turn on the living room light."
 - "Hey Google, turn off the fan."
 - "Siri, turn on the coffee maker."



Image 4.1: A user demonstrating voice control with an Alexa device to turn off a fan connected to the smart power strip.

4.2 Remote Control via App

Control your connected devices from anywhere using your smart home app. You can individually switch the four AC outlets on or off. The two USB-A and two USB-C ports are controlled together as a single unit.



Image 4.2: A user controlling home appliances remotely using a smartphone app, demonstrating the "Control from Anywhere" feature.

4.3 Scheduling and Timer Functions

Utilize the scheduling and timer features within your smart home app to automate your devices. This can help save energy and reduce electricity bills.

- Set specific times for devices to turn on or off daily.
- Create countdown timers for temporary device operation.
- Ideal for lights, humidifiers, and other appliances.

5. SAFETY INFORMATION

The UseeLink Matter Smart Power Strip is designed with multiple safety features to protect your devices and ensure safe operation.

- **Surge Protection:** Protects connected electronics from power surges and spikes.
- **Over-Heat Protection:** Prevents overheating of the power strip.
- **Over-Charge Protection:** Safeguards devices from being overcharged.
- **Over-Current Protection:** Protects against excessive current flow.

- **Short Circuit Protection:** Prevents damage from short circuits.
- **Certifications:** FCC and ETL listed for safety and quality assurance.

Always ensure the total power consumption of connected devices does not exceed the maximum rating of 16A / 3500W. Avoid using the power strip for extended periods at its maximum power capacity.



Image 5.1: The power strip acting as a surge protector, safeguarding connected devices from electrical damage.

6. SPECIFICATIONS

Feature	Detail
Brand	UseeLink
Model Number	G-MT-301U-2A2C-B
Color	Black
Total AC Outlets	4 (individually controlled)
Total USB Ports	4 (2 USB-A, 2 USB-C, controlled as one unit)

Voltage	110 Volts
Maximum Current	16 Amps
Maximum Power	3500 Watts
Power Plug Type	Type B - 3 pin (North American)
Cable Length	1.5 meters
Dimensions (L x W x H)	19.8 cm x 9.9 cm x 2.8 cm (approx.)
Compatible Devices	Laptop, Personal Computer, Smartphone, Router, Printer, Smartwatch, Camera
Smart Home Compatibility	Apple HomeKit, Amazon Alexa, Google Assistant, Siri, SmartThings (requires Matter certified hub)
Enclosure Material	Copper, Polycarbonate



Image 6.1: Diagram showing the physical dimensions of the UseeLink Matter Smart Power Strip, including its length, width, height, and cable length.

7. TROUBLESHOOTING

If you encounter issues with your smart power strip, refer to the following common solutions:

- **Device Not Pairing:**

- Ensure your Wi-Fi network is 2.4GHz. The device does not support 5GHz Wi-Fi.
- Confirm you have a Matter certified hub active and within range.
- Make sure the power strip is in pairing mode (flashing blue light). If not, press and hold the power button for 5-10 seconds.
- Check your Wi-Fi password and network stability.
- Try restarting your Wi-Fi router and the power strip.

- **Incorrect Outlet Order in App:**

- When the power strip is connected to the app, the order of the socket buttons in the app may not directly correspond to the physical order of the power strip sockets.
- You can try connecting several times to adjust the order, or rename each controlled power strip socket within the app to match its physical location and connected device.

- **Voice Control Not Responding:**

- Verify that the power strip is successfully connected to your smart home platform (Alexa, Google Home, Apple Home).
- Check your internet connection.
- Ensure your voice assistant device is online and functioning correctly.
- Confirm the names of your devices and outlets in the app match your voice commands.

- **USB Ports Not Charging:**

- Remember that all USB ports (USB-A and USB-C) are controlled as a single unit. Ensure the USB unit is turned on in your smart home app.
- Check the charging cables and devices for proper connection and functionality.

8. MAINTENANCE

To ensure the longevity and optimal performance of your UseeLink Matter Smart Power Strip, follow these simple maintenance guidelines:

- **Cleaning:** Disconnect the power strip from the wall outlet before cleaning. Use a soft, dry cloth to wipe the surface. Do not use liquid cleaners or sprays.
- **Storage:** Store the power strip in a cool, dry place away from direct sunlight and moisture when not in use for extended periods.
- **Inspection:** Periodically inspect the power cord and the power strip for any signs of damage, such as frayed wires or cracked casing. Discontinue use if damage is found.

9. WARRANTY AND SUPPORT

The UseeLink Matter Smart Power Strip comes with a manufacturer's warranty. For specific warranty details and duration, please refer to the warranty information provided at the time of purchase or contact the seller directly.

For technical support or further assistance, please contact UseeLink customer service through the contact

information provided on the product packaging or the official UseeLink website.