Black Shark BS-SP1

Black Shark BS-SP1 Bluetooth Computer Speakers User Manual

Model: BS-SP1

Introduction

The Black Shark BS-SP1 Bluetooth Computer Speakers are designed to provide a high-quality audio experience for your desktop, laptop, or other compatible devices. Featuring dual 5W neodymium speakers, multiple connectivity options (Bluetooth and USB/USB-C), and dynamic LED lighting modes, these speakers offer immersive stereo sound for gaming, movies, and music. Their compact, space-saving design fits perfectly beneath your monitor, reducing desktop clutter.



Image: The Black Shark BS-SP1 soundbar speaker, showcasing its sleek design and the included USB-C to USB-A power/audio cable.

Setup

The BS-SP1 speakers offer both wired (USB/USB-C) and wireless (Bluetooth) connection methods. Follow the

instructions below for your preferred setup.

Wired Mode (Plug & Play)

This mode is ideal for PC, desktop, laptop, and MacBook Pro/Air connections, providing both audio and power through a single cable.

1. Connect the USB/USB-C cable from the speaker to an available USB or USB-C port on your computer.
2. The speaker will automatically power on and enter "PC Mode." You may hear an audible prompt "PC Mode."
3. Adjust the volume using your computer's system controls or the speaker's integrated volume buttons. No driver installation is required.



Image: Illustration showing the speaker connected via USB/USB-C to a laptop for PC Mode, and wirelessly connected to a smartphone for Bluetooth Mode (still requiring USB power).



Image: The BS-SP1 speaker positioned on a desk next to a laptop, illustrating its simple plug-and-play setup via USB.

Bluetooth Mode

This mode is suitable for smartphones, tablets, and other Bluetooth-enabled devices. Note: Bluetooth Mode still requires the USB/USB-C cable for power.

1. Ensure the speaker is powered on via the USB/USB-C cable.
2. Press the power button on the speaker to switch to "Bluetooth Mode." You may hear an audible prompt "Bluetooth Mode."
3. On your smartphone or other Bluetooth-enabled device, open Bluetooth settings.
4. Search for and select "BS-SP1" from the list of available devices to pair.
5. Adjust the volume on both your device and the speaker to a suitable level.

Operating Instructions

Controls Overview

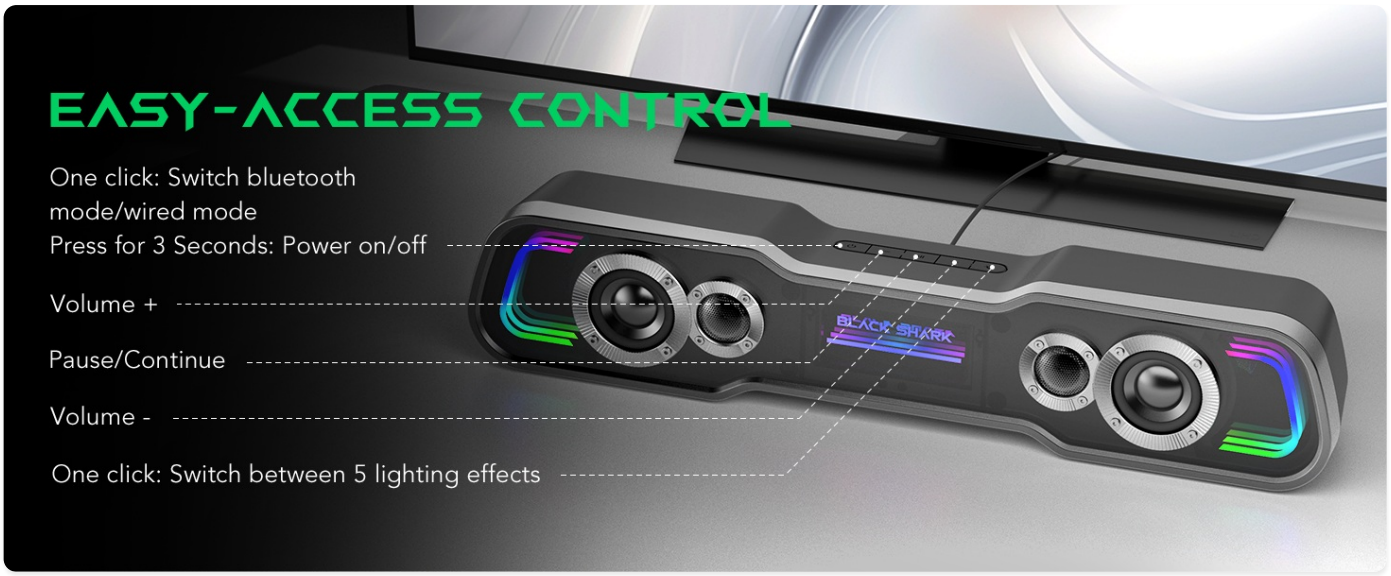


Image: A detailed diagram illustrating the control buttons on the top of the Black Shark BS-SP1 speaker, including power, volume, pause/continue, and lighting mode switch.

- **Power Button:** Press for 3 seconds to power on/off. One click to switch between Bluetooth mode and wired mode.
- **Volume +:** Increase volume.
- **Pause/Continue:** Play or pause audio playback.
- **Volume -:** Decrease volume.
- **Lighting Button:** One click to switch between 5 different lighting effects.

Dynamic Lighting Modes

The BS-SP1 features five dynamic LED lighting modes to enhance your audio experience. Press the lighting button to cycle through them:

- **Colorful Neon Lights:** A vibrant, multi-color display.
- **Breathing Light:** Lights gently fade in and out.
- **Colorful Gradient:** Colors smoothly transition across the spectrum.
- **Monochrome Fixed:** A single, static color.
- **Lights Follow Rhythm:** Lights react to the beat of the audio.



Image: Visual representation of the five distinct LED lighting modes available on the BS-SP1 speaker: Colorful Neon Lights, Breathing Light, Colorful Gradient, Monochrome fixed, and Lights Follow Rhythm.

Maintenance

To ensure the longevity and optimal performance of your Black Shark BS-SP1 speakers, follow these simple maintenance guidelines:

- **Cleaning:** Use a soft, dry cloth to wipe down the speaker's exterior. Avoid using abrasive cleaners, solvents, or sprays directly on the unit.
- **Placement:** Place the speaker on a stable, flat surface. Avoid placing it in direct sunlight, near heat sources, or in areas with high humidity.
- **Storage:** When not in use for extended periods, store the speaker in a cool, dry place, away from dust.
- **Cable Care:** Handle the USB/USB-C cable gently. Avoid sharp bends or kinks that could damage the cable.

Troubleshooting

If you encounter any issues with your BS-SP1 speakers, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
No sound from speakers.	Speaker not powered on; incorrect mode selected; volume too low; cable not properly connected.	◦ Ensure the USB/USB-C cable is securely connected and the speaker is powered on. ◦ Press the power button to switch between "PC Mode" and "Bluetooth Mode" to ensure the correct input is selected. ◦ Increase the volume on both the speaker and your connected device. ◦ Try connecting the cable to a different USB/USB-C port on your computer.
Bluetooth pairing fails.	Speaker not in Bluetooth pairing mode; device Bluetooth is off; "BS-SP1" not found.	◦ Ensure the speaker is in "Bluetooth Mode" (press the power button to switch). ◦ Make sure Bluetooth is enabled on your device. ◦ Move your device closer to the speaker. ◦ Restart both the speaker and your Bluetooth device, then try pairing again.
Sound distortion at high volumes.	Volume set too high; audio source quality.	◦ Reduce the volume on both the speaker and the connected device. ◦ Ensure the audio source (e.g., music file, streaming service) is of good quality.
LED lights not working or stuck.	Lighting mode not selected; temporary software glitch.	◦ Press the lighting button to cycle through the modes. ◦ Power off the speaker and power it back on.

Specifications

Feature	Detail
Model Name	BS-SP1
Speaker Type	Soundbar
Material	Metal, Plastic
Connectivity Technology	Bluetooth, USB
Wireless Communication	Bluetooth
Power Source	Corded Electric (USB/USB-C Powered)

Feature	Detail
Speaker Maximum Output Power	10 Watts (2x5W)
Frequency Response	20 KHz
Surround Sound Channel Configuration	2.0
Compatible Devices	Desktop, Laptop, Smartphone, Tablet
Special Features	Bass Boost, LED Light, USB Port
Control Method	Push Button
Product Dimensions (L x D x H)	16" x 2.62" x 2.75" (40.64 cm x 6.65 cm x 6.98 cm)
Item Weight	2 Pounds (0.91 kg)
Included Components	Power Cable



Image: A visual representation of the speaker's dimensions and key specifications, including speaker size, output power, audio input, and cable length.

Warranty and Support

Specific warranty details and direct support contact information are not available in the provided product data. For warranty claims or technical assistance, please refer to the product packaging or contact Black Shark customer support through their official website or the retailer from whom the product was purchased.
For general inquiries, you may visit the Black Shark Store on Amazon.

© 2025 Black Shark. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question