

VOLT PLUS TECH F9

VOLT PLUS TECH F9 Wireless V5.3 Bluetooth Earbuds User Manual

Model: F9

INTRODUCTION

Thank you for choosing the VOLT PLUS TECH F9 Wireless V5.3 Bluetooth Earbuds. These earbuds are designed to provide a high-quality audio experience with advanced features such as Bluetooth 5.3 connectivity, CVC 8.0 noise reduction, 8D stereo sound, and IPX7 waterproofing. The included charging case doubles as a 2000mAh power bank, offering extended battery life for your earbuds and the ability to charge other compatible devices. This manual provides detailed instructions for setup, operation, and maintenance to ensure optimal performance and longevity of your device.

Supports one of the Largest and Widest Variety of Apps, Devices, multiple functions and applications



Image: The F9 earbuds and charging case demonstrating compatibility with various devices and applications.

WHAT'S IN THE BOX

Upon opening your VOLT PLUS TECH F9 package, please verify that all the following items are included:

- (2) VOLT PLUS TECH F9 Wireless Earbuds
- (1) 2000mAh Power Bank Charging Case
- (1) USB-C Charging Cable
- (3) Pairs of Ear Adapters (Small, Medium, Large)
- (1) User Manual (this document)



Image: Visual representation of the package contents.

SETUP

1. Charging the Earbuds and Charging Case

Before first use, fully charge the earbuds and the charging case. The charging case features an LED display that shows the battery percentage of the case and individual charging status of the earbuds.

- Place the earbuds into the charging case. Ensure they are correctly seated; magnetic contacts will hold them in place.
- Connect the provided USB-C charging cable to the charging port on the case and to a USB power source (e.g., wall adapter, computer USB port).
- The LED display on the charging case will show the current battery level and indicate charging status. Once fully charged, the display will show "100" and the earbud indicators will turn off.
- A full charge provides approximately 5 hours of music time or 6 hours of talk time for the earbuds. The 2000mAh charging case can recharge the earbuds multiple times, extending total usage to 24-26 hours.



Image: Earbuds charging inside the case, displaying battery level.



Image: Illustration of the extended battery life provided by the charging case.

2. Using the Charging Case as a Power Bank

The 2000mAh charging case can also be used to provide emergency power to other compatible devices, such as your smartphone.

- Connect your device's charging cable to the USB output port on the charging case.
- The charging case will begin to charge your device.

Charge Your Phone

Not only you can charge your earphone, you can also charge your mobile phone

- 2,000 mah PowerBank
- Recharge Your phone 2x
- Recharge earbuds 10x



Image: The charging case functioning as a power bank for a smartphone.

3. Pairing with Your Device

The F9 earbuds utilize Bluetooth 5.3 for a stable and efficient wireless connection. They support automatic pairing for convenience.

1. Initial Pairing:

- Open the charging case. The earbuds will automatically power on and enter pairing mode.
- On your smartphone or Bluetooth-enabled device, go to the Bluetooth settings.
- Search for available devices and select "F9" from the list.
- Once connected, you will hear a confirmation tone, and the earbuds will be ready for use.

2. **Automatic Reconnection:** After the initial pairing, the earbuds will automatically connect to the last paired device when removed from the charging case, provided Bluetooth is enabled on your device.



Image: Earbuds demonstrating fast Bluetooth auto-pairing with a smartphone.

OPERATING INSTRUCTIONS

The F9 earbuds feature smart touch controls for easy management of calls, music, and voice assistant functions.

Touch Controls

- **Play/Pause:** Single tap on either earbud (L/R).
- **Next Song:** Double tap on the left earbud (L).
- **Previous Song:** Double tap on the right earbud (R).
- **Volume Up:** Triple tap on the right earbud (R).
- **Volume Down:** Triple tap on the left earbud (L).
- **Answer/End Call:** Single tap on either earbud (L/R).
- **Reject Call:** Press and hold either earbud for 2 seconds.
- **Activate Voice Assistant (Siri/Google Assistant):** Press and hold either earbud for 3 seconds.

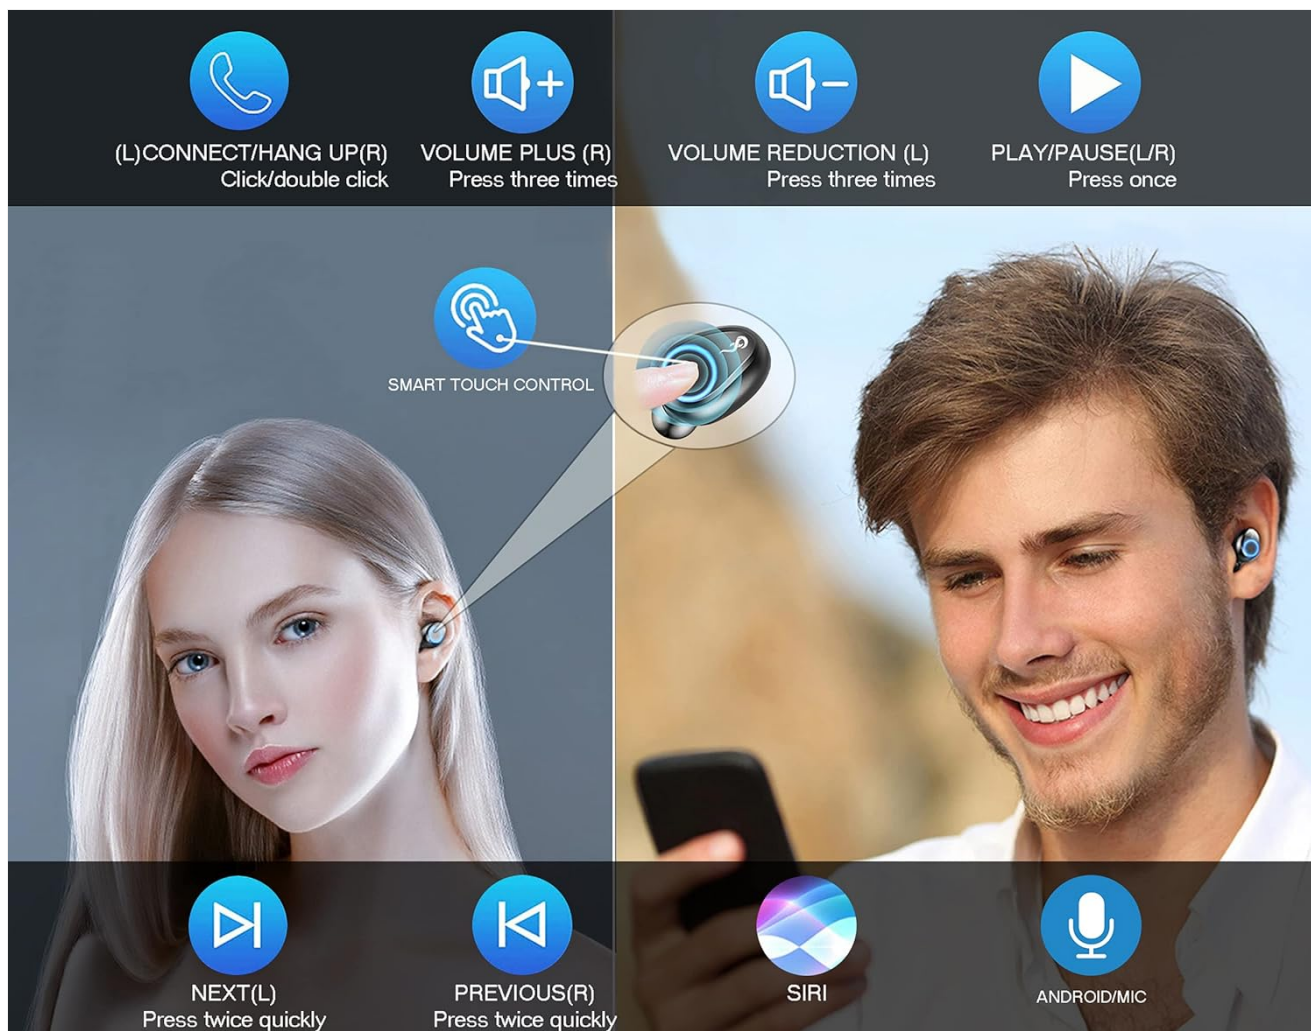


Image: Detailed diagram of earbud touch controls.

Audio Features

The F9 earbuds are engineered for an immersive audio experience:

- **8D Stereo Surround Sound:** Enjoy rich, dynamic audio with enhanced bass.
- **CVC 8.0 Noise Reduction:** This technology helps minimize ambient noise during calls, ensuring clear communication.
- **High-Fidelity Sound:** Experience crystal-clear audio quality for music and calls.



Image: Visual representation of CVC 8.0 Noise Reduction technology.

MAINTENANCE

Cleaning

To maintain optimal sound quality and hygiene, regularly clean your earbuds and charging case.

- Use a soft, dry, lint-free cloth to wipe the earbuds and charging case.
- For ear tips, remove them from the earbuds and gently clean with a mild soap solution if necessary, then rinse thoroughly and allow to dry completely before reattaching.
- Avoid using abrasive materials, solvents, or harsh chemicals.

Water Resistance (IPX7)

The F9 earbuds are rated IPX7 waterproof, meaning they can withstand immersion in water up to 1 meter deep for 30 minutes. This makes them suitable for daily life activities such as sweating during workouts or use in light rain.

- Do not intentionally submerge the charging case, as it is not waterproof.
- Ensure earbuds are completely dry before placing them back into the charging case to prevent damage.
- The IPX7 rating applies to the earbuds only, not the charging case.

25 Recharges

25 times
For Headset

120h
Music time

150h
Talk time

1 Recharge

5h
Music time

6h
Talk time



Image: Earbuds demonstrating IPX7 water resistance.

Storage

When not in use, store the earbuds in their charging case to protect them and keep them charged. Store the case in a cool, dry place away from extreme temperatures.

TROUBLESHOOTING

If you encounter any issues with your VOLT PLUS TECH F9 earbuds, please refer to the following common solutions:

- **Earbuds not pairing with each other or with device:**
 - Ensure both earbuds are charged.
 - Place both earbuds back into the charging case, close the lid, wait a few seconds, then open the lid and try pairing again.
 - On your device, forget the "F9" Bluetooth connection and attempt to pair again from scratch.
- **No sound from one earbud:**
 - Check the battery level of both earbuds.
 - Place both earbuds back into the charging case and then take them out again to force a reconnection.
 - Clean the charging contacts on both the earbuds and the case.
- **Charging case not charging:**
 - Ensure the USB-C cable is securely connected to both the case and the power source.
 - Try a different USB-C cable or power adapter.
- **Poor sound quality or dropped connection:**
 - Ensure your device is within the Bluetooth range (approximately 33 feet or 10 meters) of the earbuds.
 - Minimize obstacles between your device and the earbuds.
 - Restart your connected device.

SPECIFICATIONS

Model Name	F9
Bluetooth Version	5.3
Bluetooth Range	33 Feet (10 meters)
Noise Control	Active Noise Cancellation, Passive Noise Cancellation, Sound Isolation (CVC 8.0)
Water Resistance Level	IPX7 (Earbuds only)
Battery Life (Earbuds)	Up to 5 hours music, 6 hours talk time per charge
Charging Case Battery Capacity	2000 mAh
Total Battery Life with Case	24-26 hours
Charging Port Type (Case)	USB-C
Control Method	Touch
Compatible Devices	Android, Apple iPhone (16, 15, 14, Pro, Pro Max, Plus Models), iOS, Mac, Windows
Material	Plastic (Carrying Case), Aluminum, Hi Strength Plastic, Metal (Earbuds)
Item Weight	4 Ounces (total)

Product Dimensions	1 x 1.7 x 1.5 inches (Earbuds)
Carrying Case Dimensions	2.7 (L) x 1.3 (W) x 1.2 (H) Inches



Image: Dimensions of the earbuds and charging case.

WARRANTY AND SUPPORT

VOLT PLUS TECH products are designed for reliability and performance. For specific warranty details, please refer to the warranty card included in your product packaging or contact our customer support.

Customer Support






If you have any questions, require technical assistance, or need to report an issue, please contact VOLT PLUS TECH customer support through the retailer's platform or via the contact information provided in your product documentation. Please have your product model (F9) and purchase details ready when contacting support.

Related Documents - F9



[F9 Bluetooth Earbuds V5.2+EDR User Manual](#)

User manual for the F9 Bluetooth Earbuds, detailing specifications, pairing, usage, touch controls, charging, troubleshooting, and important safety warnings. Features Bluetooth V5.2+EDR for wireless audio.

	<p>Bluetooth Earbuds F9 User Manual</p> <p>User manual for the F9 Bluetooth Earbuds, covering specifications, operation, pairing, care, safety, warranty, packing details, and troubleshooting.</p>
	<p>F9 Upgrade TWS Bluetooth Earphones - Wireless Stereo Earbuds with Charging Case</p> <p>Explore the F9 Upgrade TWS Bluetooth Earphones. Enjoy immersive 9D stereo sound, a waterproof design, and the convenience of a charging case that doubles as a power bank for your phone. Features include seamless Bluetooth pairing, intuitive music and call controls, and voice assistant activation.</p>
	<p>boAt Immortal 171 Wireless Gaming Earbuds User Manual</p> <p>User manual for boAt Immortal 171 TWS wireless gaming earbuds, covering setup, pairing, controls, BEAST™ Mode, ENx™ Tech, charging, specifications, and safety warnings.</p>
	<p>RIVERSONG EA227 Wireless Earbuds User Manual Features, Operation & Specs</p> <p>Comprehensive user manual for RIVERSONG EA227 Wireless Earbuds (Airfly L3). Learn about features, Bluetooth 5.3, pairing, charging, troubleshooting, and specifications.</p>
 <p>User Manual Ceftydy Magnetic Wireless Battery Pack (Compatible with MagSafe)</p>	<p>Ceftydy Magnetic Wireless Battery Pack User Manual Charging Guide</p> <p>Official user manual for the Ceftydy Magnetic Wireless Battery Pack (10000mAh). Features MagSafe compatibility, Qi charging, USB-C, and built-in Lightning cable. Includes setup, usage, specifications, and safety tips.</p>