Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

HoneyGuaridan A23D

HoneyGuaridan Automatic Cat Feeder A23D User Manual

Model: A23D

1. Introduction

Thank you for choosing the HoneyGuaridan Automatic Cat Feeder A23D. This device is designed to provide scheduled and portion-controlled meals for up to two cats, ensuring a consistent feeding routine. It features a 3.5-liter capacity, a two-way food splitter, and dual power supply options for reliable operation.
This manual provides detailed instructions for the proper setup, operation, and maintenance of your automatic feeder. Please read it thoroughly before use and retain it for future reference.



Image 1.1: Front view of the HoneyGuaridan Automatic Cat Feeder A23D, showing the food reservoir, control panel, and two stainless steel feeding bowls.

2. Safety Information

- Read all instructions before operating the feeder.
- Keep the feeder away from children and pets when not in use or during assembly.
- Use only dry pet food with a kibble size less than 0.5 inches (1.27 cm) in diameter.
- Do not immerse the main unit in water or any other liquid.
- Ensure the power adapter is securely connected and placed in a dry area.
- If using batteries, ensure they are inserted correctly and replace them when low to prevent power interruption.
- Do not attempt to disassemble or repair the unit yourself. Contact customer support for assistance.

3. Package Contents

Please check the package to ensure all items are present:

- Automatic Pet Feeder Main Unit
- Food Storage Container (3.5L)
- Lid with Desiccant Compartment
- Two Stainless Steel Bowls
- Two-Way Food Splitter
- Power Adapter (USB-C cable and wall adapter)
- User Manual

4. Product Components



Image 4.1: Overview of the feeder's key features, including voice recording, dual power options, timed feeding, and multiple meal settings.

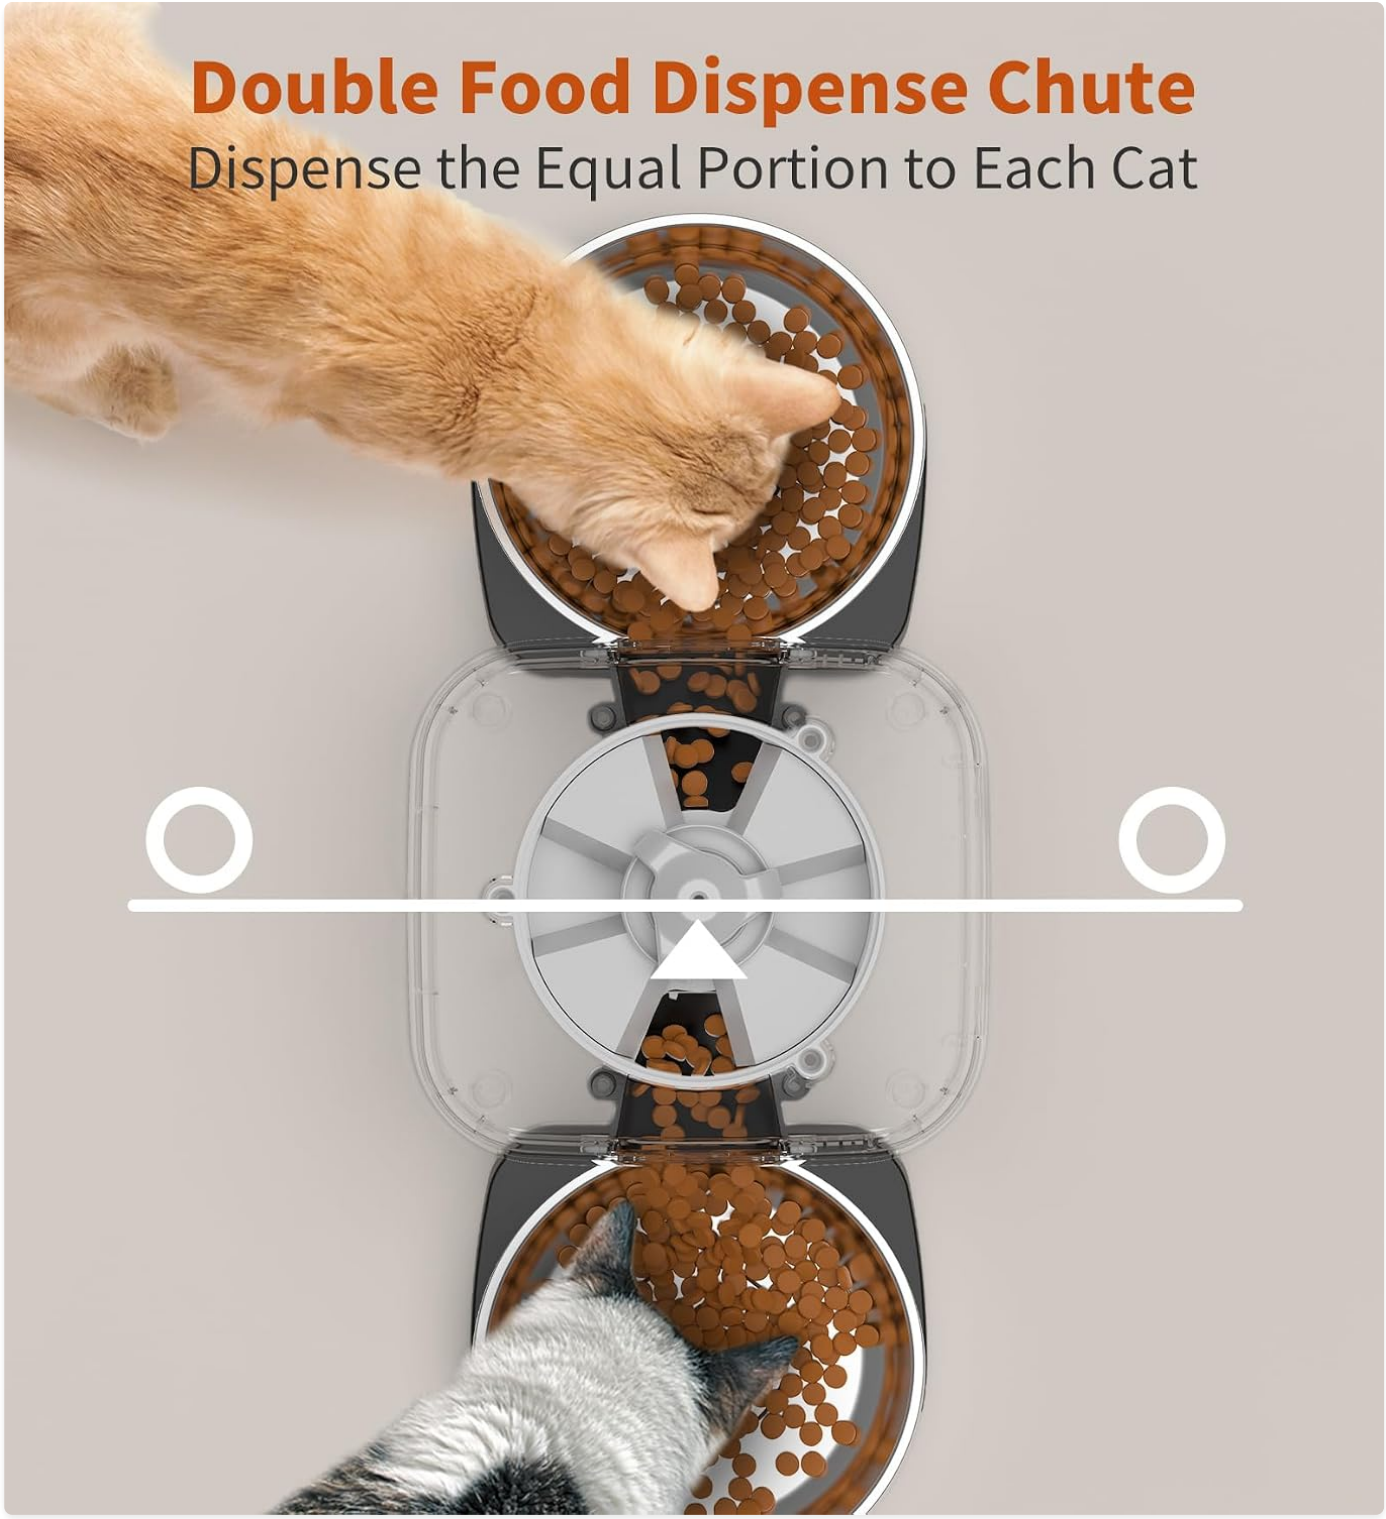


Image 4.2: Illustration of the double food dispense chute, designed to ensure equal portions are delivered to each of the two feeding bowls.



Image 4.3: Detailed view of the food reservoir's sealing components, highlighting the silicone ring, locking lid, desiccant, and sealed outlet for food freshness.

5. Setup

5.1 Assembly

1. Place the main feeder unit on a flat, stable surface.
2. Insert the two-way food splitter into the food outlet at the bottom of the main unit. Ensure it is securely seated.
3. Place the two stainless steel bowls onto the designated slots on either side of the main unit, aligning them with the splitter outlets.
4. Insert the food storage container onto the main unit.

5. Open the lid and place the moisture-proof desiccant packet into its designated compartment on the underside of the lid. Close the lid securely.

5.2 Power Supply



Image 5.1: Illustration demonstrating the dual power supply capability, showing the battery compartment for three D-size batteries and the connection point for the Type-C power adapter.

The feeder supports dual power supply for uninterrupted operation:

- **AC Power:** Connect the USB-C cable to the feeder and the power adapter to a standard wall outlet. This is the primary power source.
- **Battery Backup:** For power outages, install 3 D-size batteries (not included) into the battery compartment at the bottom of the unit. The feeder will automatically switch to battery power if AC power is lost. Settings will be retained during power transitions.

5.3 Filling the Food Reservoir

1. Open the top lid of the feeder.
2. Pour dry pet food into the 3.5-liter storage container. Ensure the kibble size is suitable (less than 0.5 inches in diameter).
3. Close the lid securely to maintain food freshness and prevent pets from accessing the food.

6. Operating Instructions



Image 6.1: Detailed view of the user-friendly control panel, displaying the current time and programmable meal slots, with various function buttons.

6.1 Control Panel Overview

The control panel features an LCD screen and several buttons:

- **MEAL Button:** Used to select meal numbers (1-6).
- **PORTION Button:** Adjusts the portion size for each meal.
- **TIME Button:** Sets the current time and meal times.
- **LOCK Button:** Locks/unlocks the control panel to prevent accidental changes.
- **RECORD Button:** Records and plays back a voice message.
- **MANUAL FEED Button:** Dispenses food manually.
- **UP/DOWN Arrows:** Navigate and adjust values.

6.2 Setting Current Time

1. Press and hold the **TIME** button until the hour display flashes.
2. Use the **UP/DOWN** arrows to set the current hour.
3. Press the **TIME** button again to move to minutes, then use **UP/DOWN** arrows to set minutes.
4. Press the **TIME** button to confirm.

6.3 Programming Feeding Schedule

The feeder allows up to 6 meals per day, with adjustable portion sizes for each.



Image 6.2: A visual representation of setting a customized feeding schedule, showing different meal times and corresponding portion sizes.

1. Press the **MEAL** button to select the desired meal number (e.g., Meal 1). The meal number will flash.
2. Press the **TIME** button. The hour for that meal will flash. Use **UP/DOWN** arrows to set the feeding hour.
3. Press the **TIME** button again to set the minutes for the meal.
4. Press the **PORTION** button. The portion size will flash. Use **UP/DOWN** arrows to set the number of portions (1-9). One portion is approximately 15ml or 6g.
5. Repeat steps 1-4 for each desired meal (up to 6 meals).
6. To disable a meal, set its portion size to 0.

6.4 Manual Feeding

Press the **MANUAL FEED** button once to dispense one portion of food immediately. This will not affect the programmed feeding schedule.

6.5 Voice Recording

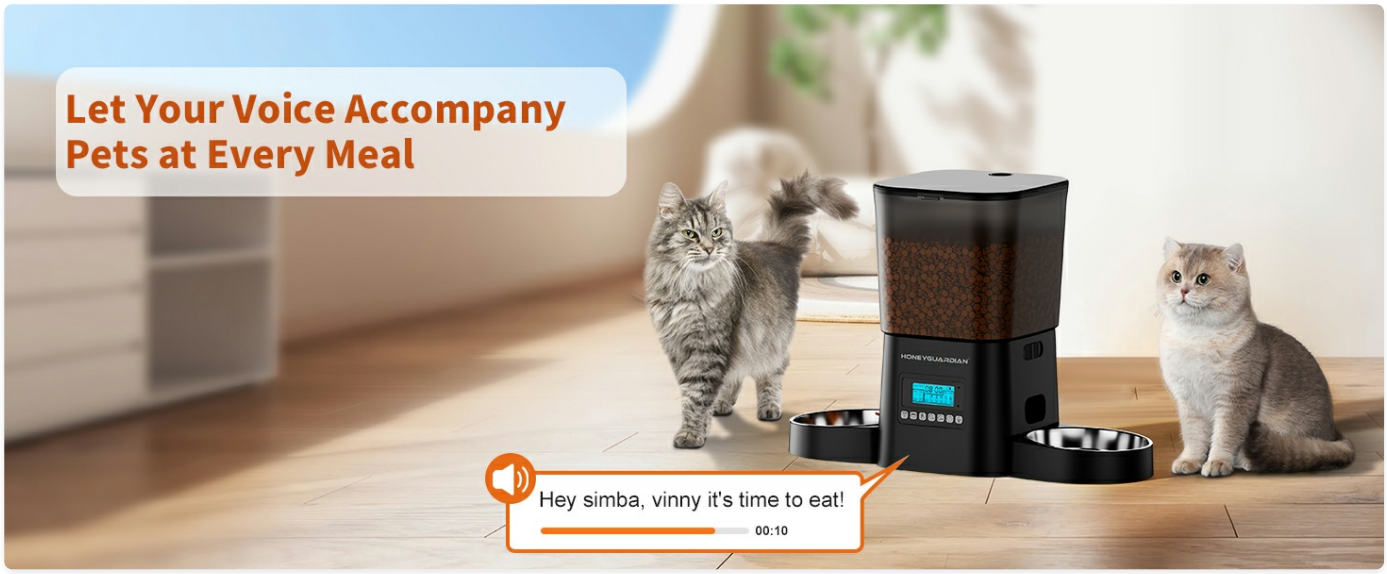


Image 6.3: The voice recording feature allows you to record a personalized message that plays at each mealtime, calling your pets to eat.

1. Press and hold the **RECORD** button. The microphone icon will appear on the screen.
2. Speak your message (up to 10 seconds) into the microphone located on the feeder.
3. Release the **RECORD** button to save the message.
4. The recorded message will play automatically at each scheduled mealtime.

7. Maintenance

7.1 Cleaning

Regular cleaning ensures hygiene and proper functioning of the feeder.

- **Disassembly:** Unplug the feeder and remove the food storage container, lid, food splitter, and stainless steel bowls.
- **Washable Parts:** The food storage container, lid, food splitter, and stainless steel bowls can be washed with mild soap and water. Rinse thoroughly and dry completely before reassembly.
- **Main Unit:** Wipe the main unit with a soft, damp cloth. Do not immerse the main unit in water.
- **Reassembly:** Ensure all parts are completely dry before reassembling the feeder.

7.2 Desiccant Replacement

The moisture-proof desiccant helps keep the food fresh. It is recommended to replace the desiccant packet every 1-2 months, or as needed, depending on humidity levels.

8. Troubleshooting

Problem	Possible Cause	Solution
Feeder not dispensing food.	Food hopper empty; food jammed; power issue; incorrect settings.	Refill food; check for kibble jams in the dispenser; ensure power is connected or batteries are fresh; verify meal schedule and portion settings.

Problem	Possible Cause	Solution
Food only dispenses to one bowl.	Food splitter not installed correctly or blocked.	Check that the two-way splitter is properly seated and clear of obstructions.
Display screen is off.	No power.	Check AC adapter connection; replace D-size batteries if using battery power.
Recorded voice message is unclear or not playing.	Recording error; volume too low.	Re-record the message, speaking clearly and close to the microphone. Ensure volume is adequate.
Pets knocking over the feeder.	Feeder not stable.	Ensure the feeder is placed on a flat, stable surface. The design includes a stable base to minimize tipping.

9. Specifications

- **Model:** A23D
- **Capacity:** 3.5 Liters
- **Material:** Food-grade ABS plastic, Stainless Steel bowls
- **Dimensions (LxWxH):** 7 x 7 x 8 inches (17.78 x 17.78 x 20.32 cm)
- **Item Weight:** 2.72 pounds (1.23 kg)
- **Power Supply:** DC 5V/1A adapter (USB-C) and 3 x D-size batteries (not included)
- **Number of Meals:** Up to 6 meals per day
- **Portion Size:** 1-9 portions per meal (approx. 15ml/6g per portion)
- **Voice Recording:** Up to 10 seconds
- **Compatible Food:** Dry kibble, diameter less than 0.5 inches (1.27 cm)

10. Warranty and Support

HoneyGuaridan products are designed for quality and reliability. For warranty information, technical support, or any questions regarding your automatic feeder, please refer to the contact information provided on the product packaging or visit the official HoneyGuaridan website. Please have your model number (A23D) and purchase details ready when contacting support.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Answered questions about this manual

Does the HoneyGuaridan A23D Automatic Cat Feeder have a mobile app?

No, the HoneyGuaridan A23D does not have a mobile app. It is a programmable feeder that is managed entirely through the physical control panel located on the front of the unit. According to the...

Read full answer

Open the live page

https://manuals.plus/asin/B0DZGPJP74

More documents and user manuals: **https://manuals.plus/**