



Manuals.plus /

› Omana /

› Omana 3-in-1 Portable Coffee Machine User Manual

Omana RK57

Omana 3-in-1 Portable Coffee Machine User Manual

Model: RK57

INTRODUCTION

The Omana 3-in-1 Portable Coffee Machine (Model RK57) is a compact and versatile single-serve coffee brewer designed for convenience on the go. This wireless electric coffee maker features self-heating capabilities and is compatible with ground coffee, Nespresso pods, and Dolce Gusto coffee capsules, allowing you to enjoy fresh espresso wherever you are.

Its rocket-inspired design makes it a unique addition to your travel or home setup. This manual provides essential information for the safe and efficient operation, maintenance, and troubleshooting of your new coffee machine.

PRODUCT COMPONENTS

Familiarize yourself with the various parts of your Omana Portable Coffee Machine:

- Upper Cover
- Water Tank
- Body
- Switch
- Indicator Light
- Coffee Powder Adapter
- Portafilter
- Nespresso Capsule Adapter
- Dolce Gusto Capsule Adapter
- Bracket (for stability)
- Coffee Cup
- Type-C Charging Port

19Bar

HIGH-PRESSURE EXTRACTION



Provides stable
19 bar pressure



Strong-flavored
Espresso coffee



Creates your
own coffee shop



2600MAH x 3



Figure 1: Detailed view of the Omana Portable Coffee Machine components.

WHY CHOOSE US

Impetus Espresso Coffee Maker



Maximum 200 extractions without heating

Heating about 4-8 minutes

Hand - free

19 Bar Concentrated Extraction

Others



Extract 10 to 15 cups

Unheated

Complicated

Pressure point

Figure 2: Included accessories with the Omana Portable Coffee Machine.

SETUP AND INITIAL USE

Charging the Device

Before first use, fully charge the coffee machine. The device is equipped with a powerful 7800mAh battery. Use the provided Type-C charging cable to connect the machine to a power source (car charger, power bank, or laptop).

- A full charge typically takes approximately 120 minutes.
- A single charge allows for over 200 cups of coffee when using hot water (no heating required by the machine) or 4-5 cups when heating cold water.

PRODUCT COMPONENTS DESCRIPTION :



Figure 3: Battery and Charging Information.

OPERATING INSTRUCTIONS

The Omana Portable Coffee Machine offers a 3-in-1 brewing system, supporting ground coffee, Nespresso capsules, and Dolce Gusto capsules.

Preparing Your Coffee

Select the appropriate adapter based on your coffee choice:

1. **For Ground Coffee:** Use the Coffee Powder Adapter. Fill with your desired amount of ground coffee.
2. **For Nespresso Capsules:** Use the Nespresso Capsule Adapter. Insert a Nespresso-compatible capsule.
3. **For Dolce Gusto Capsules:** Use the Dolce Gusto Capsule Adapter. Insert a Dolce Gusto capsule.



Figure 4: Installation steps for different coffee types.

Adding Water and Brewing

The machine can brew with either cold or hot water. The water tank capacity is 80ml.

- **Using Cold Water (Self-Heating):** Fill the water tank with cold water. Press and hold the power button for 2 seconds. The machine will automatically heat the water to 92°C/198°F (typically 5-6 minutes for 70ml) and then automatically extract the coffee.
- **Using Hot Water (No Heating):** Fill the water tank with hot water. Double-click the power button to start brewing directly. This saves battery life and time.

ABOUT 120 MINUTES: FULL CHARGING



BATTERY
2600MAH x 3

TIME FULL CHARGE:

Brew about 200 times
(extraction without heating)

Brew about 2 times
(heating with 50ml ice water)

Brew about 3-4 times
(heating with 50ml normal
temperature water)

TIME WORKING :

About 1 minutes : Extraction without heating

About 4 minutes : heat 50ml water

About 8 minutes : heat 70ml water

USB-TYPE C CHARGING PORT



Car charging



Power bank charging



Laptop charging



Figure 5: Water addition and brewing methods.

The machine delivers 60ml of espresso with a maximum pressure of 19 BARS, ensuring a rich flavor and crema.

Product Overview Video

Watch this video for a visual guide on the product's features and operation.

Your browser does not support the video tag.

Video 1: Product overview and display of the Omana Portable Coffee Machine. This video demonstrates the machine's compact size, ease of use, and the quality of coffee it produces, including its compatibility with various coffee types and its self-heating function.

MAINTENANCE AND CLEANING

Regular cleaning ensures optimal performance and longevity of your coffee machine.

- **Automatic Cleaning:** Add fresh water to the machine and run it once without any coffee capsules or powder. This helps to automatically clean the internal components.
- **Manual Cleaning:** The capsule adapter and food-grade coffee cup can be easily removed and rinsed with water.
- **Important: DO NOT SOAK THE MACHINE** in water. Only clean removable parts and wipe the main body with a damp cloth.

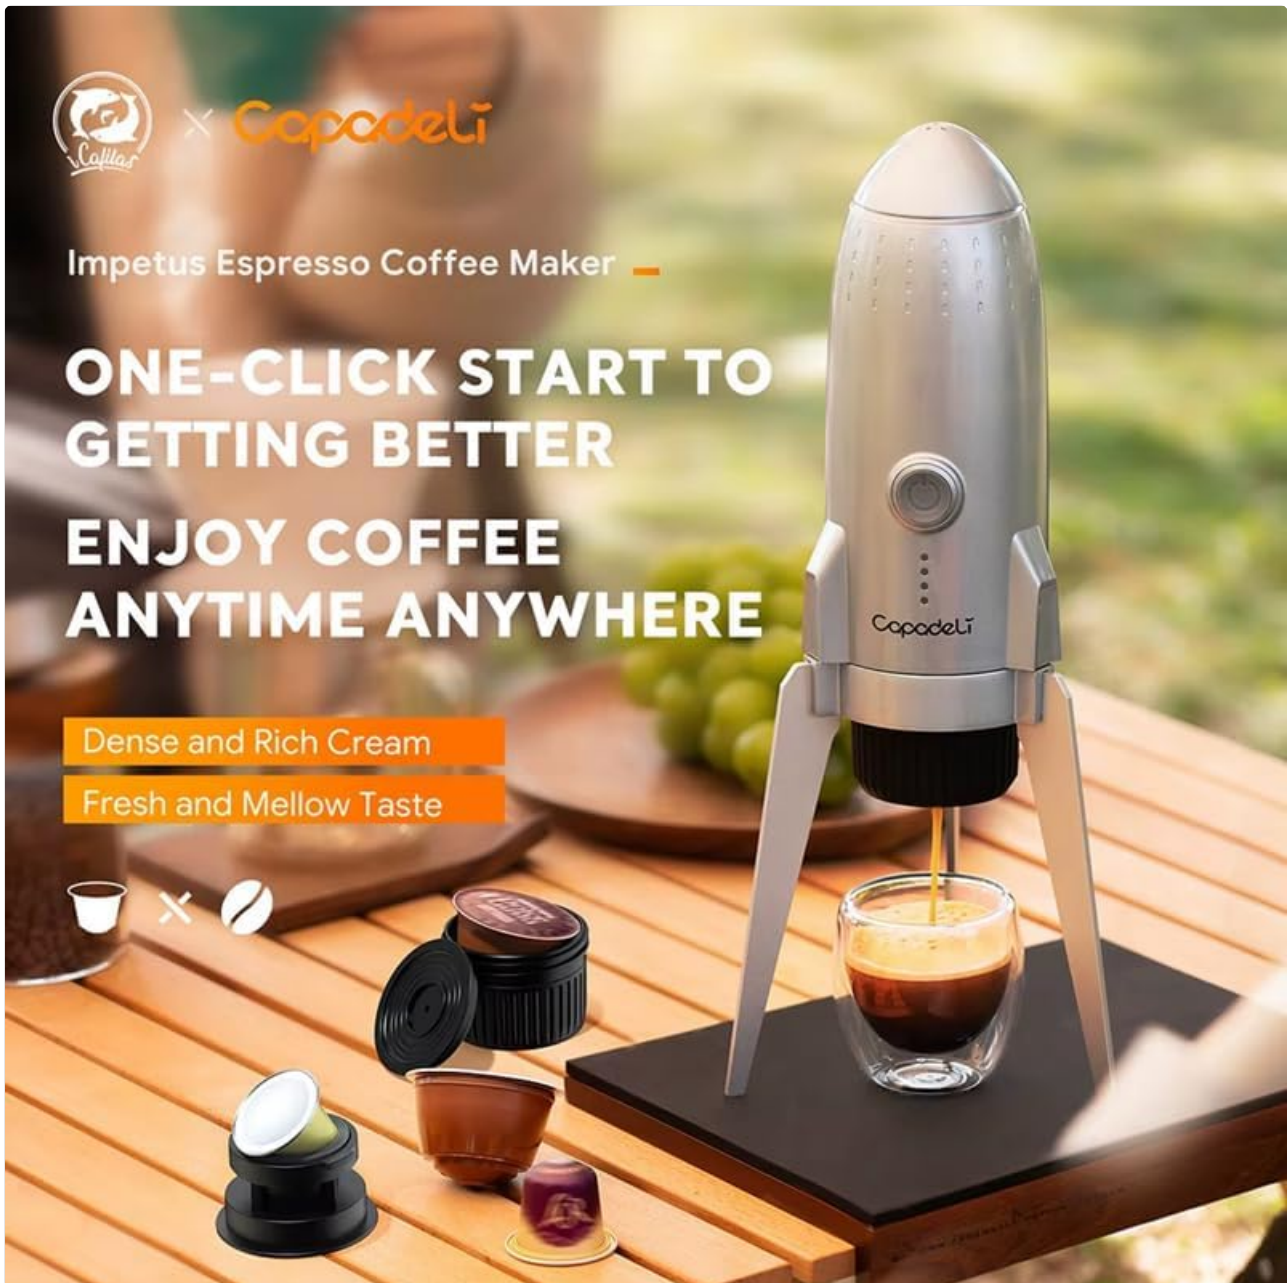


Figure 6: Easy cleaning of removable parts.

TROUBLESHOOTING

If you encounter issues with your Omana Portable Coffee Machine, please refer to the following common solutions:

- **No Power/Not Turning On:** Ensure the battery is fully charged. Connect the machine to a power source and allow it to charge for at least 30 minutes before attempting to turn it on.
- **Coffee Not Brewing/Weak Flow:**
 - Check water level in the tank.
 - Ensure the coffee adapter is correctly installed and sealed.
 - If using ground coffee, ensure it's not too finely ground or over-tamped, which can block the flow.
 - Perform an automatic cleaning cycle to clear any blockages.
- **Water Not Heating:** Ensure you are pressing and holding the button for 2 seconds for cold water heating. Verify the battery has sufficient charge, as heating consumes more power.
- **Leaking:** Ensure all components, especially the coffee adapter and water tank, are securely tightened before brewing.

If problems persist, please contact Omana customer support for further assistance.

SPECIFICATIONS

Feature	Detail
Brand	Omana
Model Name	3in1 Portable Coffee Machine (RK57)
Color	Silver
Product Dimensions	3.54"D x 3.54"W x 10.63"H
Item Weight	835 Grams (1.84 pounds)
Coffee Maker Type	Espresso Machine
Compatibility	Ground Coffee, Nespresso Pods, Dolce Gusto Capsules
Water Capacity	80ml
Max Temperature	92°C / 198°F (Self-heating)
Max Pressure	19 BARS
Battery	7800mAh Lithium Ion (3 included)
Charging Time	Approx. 120 minutes for full charge
Usage per Charge	200+ cups (hot water), 4-5 cups (cold water heating)
Special Features	Portable, Wireless, Self Heating, Lightweight, 3-in-1 Compatibility
Recommended Uses	Camping, Outdoor, Office, Car, Home
Manufacturer	iCafila
Date First Available	March 7, 2025

WARRANTY AND SUPPORT

For warranty information and customer support, please refer to the product packaging or contact Omana directly through their official website or the retailer where the product was purchased. Keep your proof of purchase for any warranty claims.