



[Manuals.plus](#) /

› [AIKEEP](#) /

› AIKEEP 2-in-1 Dog Shock Collar and Bark Collar User Manual - Model OTB3

AIKEEP OTB3

AIKEEP 2-in-1 Dog Shock Collar and Bark Collar User Manual - Model OTB3

Your comprehensive guide to effective and safe dog training.

1. INTRODUCTION

This manual provides detailed instructions for the proper setup, operation, and maintenance of your AIKEEP 2-in-1 Dog Shock Collar and Bark Collar (Model OTB3). Designed for dogs weighing 8-120 lbs, this versatile training tool offers multiple modes to assist in correcting unwanted behaviors and promoting positive habits. Please read this manual thoroughly before use to ensure safe and effective training.

2. WHAT'S IN THE BOX

Upon opening your AIKEEP 2-in-1 Dog Shock Collar and Bark Collar package, you will find the following components:

- Remote Transmitter
- Collar Receiver with Adjustable Nylon Strap
- USB Charging Cable (Type-C)
- Test Bulb
- Metal Prongs (short and long)
- Silicone Caps for Prongs
- Wrist Strap for Remote
- User Manual



Image: All components included in the AIKEEP 2-in-1 Dog Shock Collar and Bark Collar package.

Your browser does not support the video tag.

Video: An overview of the contents included in the AIKEEP 2-in-1 Dog Training Collar package.

3. PRODUCT FEATURES

The AIKEEP 2-in-1 Dog Shock Collar and Bark Collar is equipped with advanced features to facilitate effective dog training:

- **2-in-1 Functionality:** Combines a remote-controlled training collar with an automatic bark collar.
- **Multiple Training Modes:** Offers 8 beep levels, 16 vibration levels, and 99 static shock levels for customizable training.
- **Automatic Bark Collar Mode:** Features 5 sensitivity levels to automatically detect and respond to barking.
- **Extended Remote Range:** Provides an ultra-long 3300FT range with a stable signal for training across various environments.
- **IP67 Waterproof Receiver:** The receiver is waterproof, allowing for training in wet conditions. (Note: The remote is not waterproof).
- **Fast Charging & Long Battery Life:** High-capacity rechargeable battery charges in 2 hours, lasting 15+ days for the receiver and 30+ days for the remote.

- **Adjustable Nylon Collar:** Soft, adjustable strap (6-27 inches) suitable for small, medium, and large dogs (8-120 lbs).
- **Safety Lock:** Remote control features a safety lock button to prevent accidental operation.
- **LED Display:** Large, backlit LED screen on the remote for clear visibility and intuitive one-hand controls.



2-IN-1

Bark and Shock Collar



Dog Bark Collar

Dog Bark Collar Sensitivity





- 

Beep
(1-8 levels)
- 

Vibration
(1-16 levels)
- 

Safe Shock
(1-99 levels)



Dog Shock Collar

Image: Illustration of the 2-in-1 bark and shock collar functionality with sensitivity levels and mode types.

For 8-120lbs



Adjustable **6-27** Inches Nylon Collar

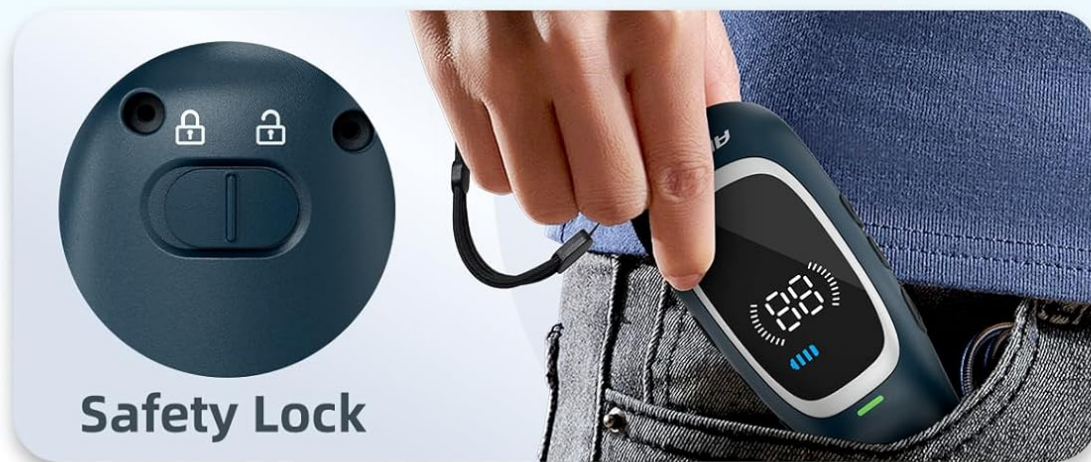


Image: The IP67 waterproof receiver collar shown with a dog in water, highlighting its durability.

Long-Lasting

Battery Life



Fully Charged
in **2** Hours



Last for
15-30 days



Image: Visual representation of the Type-C fast charging and long battery life for both the remote and receiver.

4. SETUP AND ADJUSTMENT

4.1 Adjusting the Collar Strap

The nylon collar strap is adjustable from 6 to 27 inches to fit various dog sizes. To adjust:

1. Slide the buckle to loosen or tighten the strap.
2. Thread the strap through the buckle to secure the desired length.
3. Ensure the collar is snug but not too tight; you should be able to fit two fingers comfortably between the collar and your dog's neck.
4. If necessary, the strap can be trimmed to size. To prevent fraying after cutting, carefully singe the cut end with a lighter.

Big LED Display

Effortless Training



Image: The adjustable nylon collar shown with various dog breeds, indicating suitability for 8-120 lbs dogs.

4.2 Charging the Devices

Both the remote transmitter and collar receiver are rechargeable via the included Type-C USB cable. A full charge takes approximately 2 hours.

- Connect the charging cable to the charging port on each device.
- Plug the USB end into a compatible power source (e.g., computer, wall adapter).
- The battery indicator on the LED display will show charging status.

4.3 Pairing the Collar

To ensure the remote and receiver communicate correctly, they must be paired:

1. Ensure both the remote and receiver are sufficiently charged.

2. Turn on the receiver by pressing and holding the mode button for 2 seconds.
3. On the remote, select the desired channel (if training multiple dogs).
4. Press any training button (Beep, Vibration, or Shock) on the remote. The receiver should respond, indicating successful pairing.

Your browser does not support the video tag.

Video: Demonstrates the process of pairing the collar receiver with the remote transmitter.

5. OPERATING MODES

The AIKEEP collar offers three primary operating modes:

5.1 Remote Training Mode

This mode allows you to manually control the training stimuli via the remote transmitter.

- **Beep Mode (1-8 levels):** Delivers an audible tone. Adjust levels using the remote's controls.
- **Vibration Mode (1-16 levels):** Provides a tactile vibration. Adjust levels using the remote's controls.
- **Shock Mode (1-99 levels):** Delivers a static stimulation. Adjust levels carefully to find the lowest effective setting for your dog. Use the included test bulb to verify functionality.

Your browser does not support the video tag.

Video: Explains how the remote training modes (Beep, Vibration, Shock) function and how to adjust their intensity levels.

5.2 Automatic Bark Collar Mode

In this mode, the collar automatically detects barking and delivers corrective stimuli based on preset sensitivity levels.

- **Sensitivity Levels (5 levels):** Adjust the sensitivity to control how easily the collar triggers in response to barking. Higher sensitivity means it will trigger with softer barks.
- The collar can be set to respond with Beep, Vibration, or a combination of Beep+Vibration+Shock.

Your browser does not support the video tag.

Video: Illustrates how the automatic anti-bark mode works, including how to adjust its sensitivity.

5.3 Combined Mode

This mode allows the collar to function as both a remote training collar and an automatic bark collar simultaneously.

6. SAFETY GUIDELINES

To ensure the safety and well-being of your dog, please adhere to the following guidelines:

- This training collar is a tool, not a toy. Keep it away from children.
- The receiver is IP67 waterproof, but the remote is not. Keep the remote away from water.
- Ensure proper fit: The collar should be snug enough for the contact points to touch the skin, but not so tight as to cause discomfort or restrict breathing.
- Avoid leaving the collar on your dog for more than 12 hours per day.
- Reposition the collar every 1-2 hours to prevent pressure sores or skin irritation.
- Regularly check your dog's neck for any signs of irritation or redness. If irritation occurs, discontinue use and consult a veterinarian.

- Use the lowest effective stimulation level. The goal is to get your dog's attention, not to cause pain.

7. SPECIFICATIONS

- **Brand:** AIKEEP
- **Model Number:** OTB3
- **Color:** Blue
- **Material:** Nylon
- **Closure Type:** Buckle
- **Dog Breed Size Recommendation:** Small, Medium, Large (8-120 lbs)
- **Collar Strap Adjustment:** 6-27 inches
- **Remote Range:** 3300FT
- **Receiver Waterproof Rating:** IP67
- **Battery Life (Receiver):** 15+ days (2-hour charge)
- **Battery Life (Remote):** 30+ days (2-hour charge)
- **Included Components:** Remote Control, Collar Receiver, Charging Cable, Test Bulb, Prongs, Silicone Caps, Wrist Strap, User Manual

8. SUPPORT

For any issues or questions regarding your AIKEEP 2-in-1 Dog Shock Collar and Bark Collar, please feel free to contact AIKEEP customer support. Refer to the contact information provided in your product packaging or on the official AIKEEP website.