

Manuals.plus /

- › Qfun /
- › Qfun SL6319 10 Mil A3 Laminator Machine User Manual

## Qfun SL6319

# Qfun SL6319 10 Mil A3 Laminator Machine User Manual

Model: SL6319 | Brand: Qfun

## 1. INTRODUCTION

The Qfun SL6319 10 Mil A3 Laminator Machine is designed for high-volume lamination needs in office, school, and home environments. Featuring a 4-roller system, 60-second fast warm-up, and a lamination speed of up to 1000mm/min, this heavy-duty thermal laminator provides efficient and professional results. It supports pouch thicknesses from 3 to 10 mil and accommodates documents up to A3 size (11x17 inches), ensuring versatile protection for various items.



Figure 1.1: Qfun Laminator highlighting 10X efficiency and 1000mm/min lamination speed.

## 2. PRODUCT OVERVIEW

### 2.1 Key Features

- **4-Roller System:** Ensures uniform pressure, eliminating air bubbles, curling, and wrinkles for a smooth, flat, and durable laminated finish.

- **Fast Warm-Up & Speed:** Ready in 60 seconds with a lamination speed of up to 1000mm/min.
- **REV Anti-Jam System:** One-touch reverse button safely releases documents, preventing jams.
- **Dual Protection + Smart Standby:** Integrated NTC temperature control chip with safeguards against overheating and high-temperature power cut-off. Auto-standby activates after 30 minutes of inactivity.
- **Full 3-10 Mil Compatibility:** Supports various pouch thicknesses for items from ID cards to A3-sized posters.
- **Hot & Cold Lamination Modes:** Versatile options for different document types and pouch requirements.

## 2.2 Included Accessories

The laminator comes with a complete kit for enhanced functionality:

- Large document trimmer
- Specialized cleaning paper
- 30 starter laminating sheets (A3/A4/A5/A6 sizes)
- Built-in paper cutter with 3 cutting heads (linear, wave, dashed)
- Round corner cutter
- Hole punch
- 3 Iron Rings for binding
- Foldable tray



Figure 2.1: Overview of the Qfun 12-in-1 Multi-Functional Laminator and its accessories.

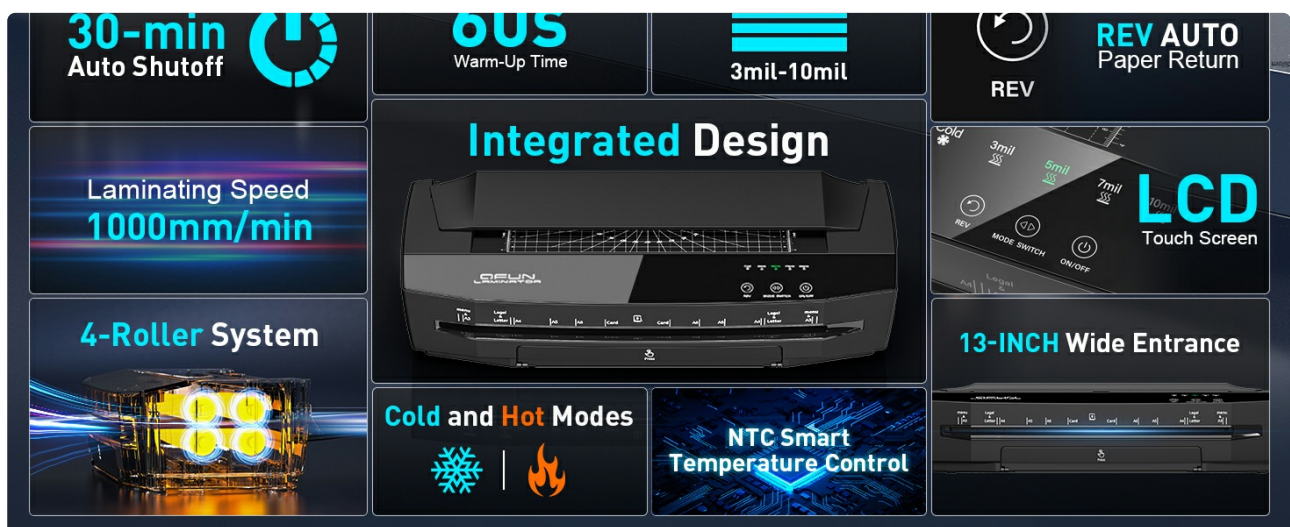


Figure 2.2: The 4-Roller System for superior lamination quality.

### 3. SETUP

1. **Unpack:** Carefully remove the laminator and all accessories from the packaging.
2. **Placement:** Place the laminator on a stable, flat, and heat-resistant surface, ensuring adequate ventilation around the unit.
3. **Power Connection:** Plug the power cord into a standard electrical outlet.
4. **Power On:** Flip the ON/OFF switch located on the control panel to the 'ON' position. The power indicator light will illuminate.
5. **Mode Selection:** Use the 'MODE SWITCH' button to select your desired lamination mode (Cold, 3mil, 5mil, 7mil, 10mil). The corresponding indicator light will blink during warm-up.
6. **Warm-Up:** The laminator will preheat in approximately 60 seconds. The selected mode indicator light will stop blinking and remain solid when the machine is ready for use.



Figure 3.1: Basic 3-step lamination process.

Your browser does not support the video tag. This video demonstrates the 60-second warm-up process and various features of the Qfun A3 Laminator.

Video 3.1: Demonstrating the 60-second warm-up and key features of the Qfun A3 Laminator.

### 4. OPERATING INSTRUCTIONS

#### 4.1 Hot Lamination

1. Ensure the laminator is powered on and the selected mil setting (3mil, 5mil, 7mil, or 10mil) is ready (solid green light).
2. Place your document inside a laminating pouch, ensuring it is centered with a small margin on all sides.
3. Insert the sealed edge of the pouch into the laminator's entry slot. The machine will automatically feed the pouch through.
4. Once the laminated document exits the machine, retrieve it carefully. It will be warm but safe to handle.

#### 4.2 Cold Lamination

1. Select the 'Cold' mode on the control panel.
2. Use self-adhesive cold laminating pouches. Place your document inside the pouch.

3. Insert the pouch into the laminator's entry slot.

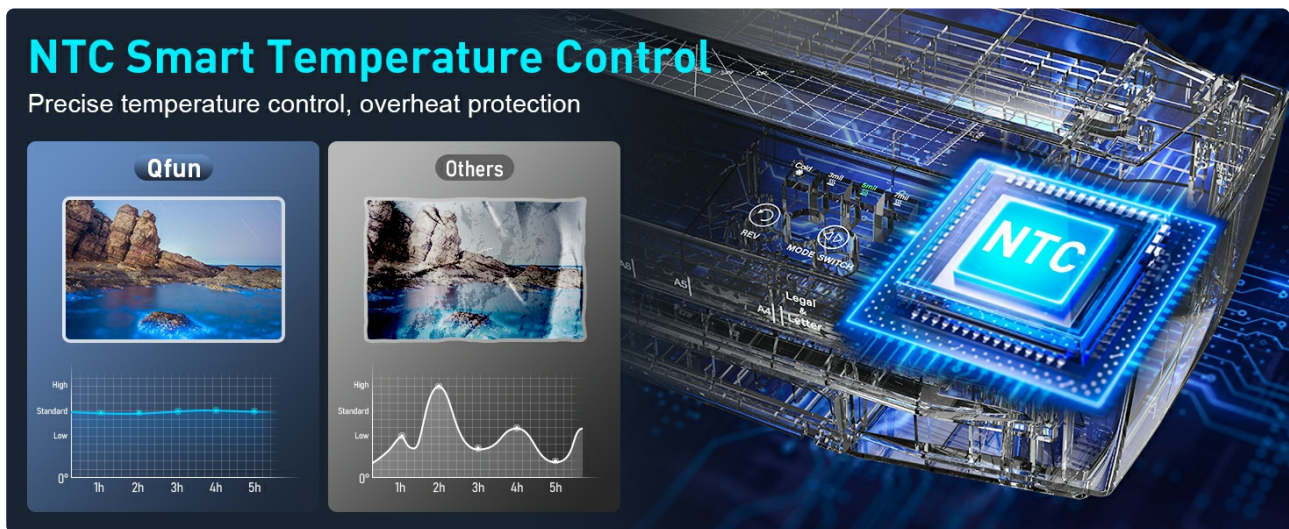


Figure 4.1: Control panel with Hot and Cold lamination mode selection.

Your browser does not support the video tag. This video illustrates the thermal and cold lamination process using the Qfun laminator.

Video 4.1: Demonstration of thermal and cold lamination with the Qfun machine.

### 4.3 Using Integrated Accessories

- **Paper Cutter:** The built-in paper cutter allows for precise trimming. Choose from linear, wave, or dashed cutting styles by swapping the cutting heads.
- **Corner Rounder:** Use the corner rounder to create smooth, safe, and professional-looking rounded corners on your laminated documents.
- **Hole Punch & Binder Rings:** Punch holes in your laminated documents and use the included binder rings for easy organization and binding.

Your browser does not support the video tag. This video showcases the various accessories included with the Qfun laminator, such as the paper cutter, corner rounder, and hole punch.

Video 4.2: Overview of the Qfun laminator's integrated accessories and their use.

## 5. MAINTENANCE

- **Cleaning:** Regularly use the specialized cleaning paper to remove any adhesive residue or dust from the rollers. Ensure the machine is cool and unplugged before cleaning.
- **Storage:** When not in use, store the laminator in a dry, dust-free environment. The auto-standby function helps conserve energy and ensures safety.
- **Accessory Storage:** Utilize the built-in accessory compartment to keep all tools organized and easily accessible.

## 6. TROUBLESHOOTING

### 6.1 Paper Jam

If a document gets jammed during lamination:

1. Immediately press the 'REV' (Reverse) button on the control panel.
2. The machine will reverse the rollers, allowing you to safely pull out the jammed document without damage.
3. Inspect the document and pouch for any damage before attempting to re-laminate or discard.

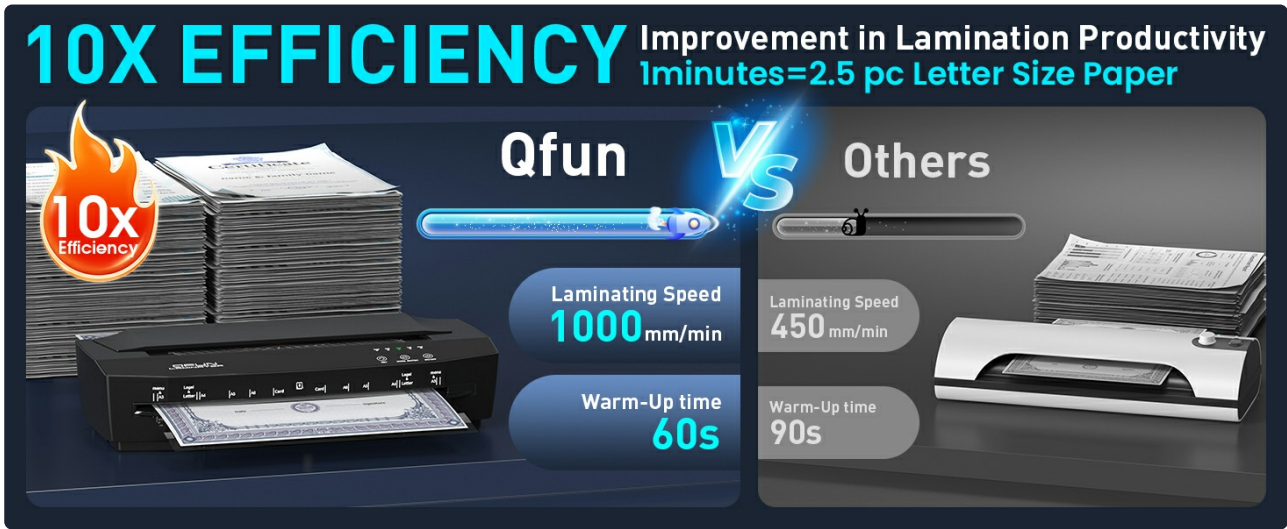


Figure 6.1: The REV Anti-Jam System for easy document release.

## 6.2 Poor Lamination Quality (Bubbles, Wrinkles, Incomplete Seal)

- **Check Pouch Thickness:** Ensure the selected mil setting on the laminator matches the thickness of your laminating pouch.
- **Proper Insertion:** Always insert the sealed edge of the pouch first and ensure it is fed straight into the machine.
- **Warm-Up Time:** Verify that the 'Ready' indicator light is solid, indicating the machine has reached the optimal temperature.
- **Document Centering:** Make sure the document is properly centered within the pouch with even margins to allow for a complete seal.

## 7. SPECIFICATIONS

Feature	Specification
Model Number	SL6319
Laminating Width Maximum	13 Inches (A3)
Number of Rollers	4
Warm-Up Time	60 seconds
Lamination Speed	1000mm/min
Pouch Thickness Compatibility	3-10 mil
Item Weight	3.8 Kilograms
Parcel Dimensions	44.5 x 21.49 x 15.29 cm
Safety Features	NTC Temperature Control, Overheat Protection, Auto Shut-off

## 8. WARRANTY AND SUPPORT

The Qfun SL6319 Laminator comes with an extended **2-year warranty**, ensuring reliable performance and durability. For any questions, technical assistance, or warranty claims, please contact Qfun customer support. Our dedicated team is available to provide prompt and helpful solutions.

This warranty covers manufacturing defects and ensures your professional investment is safeguarded for worry-free, efficient operation.