

[Manuals.plus](#) /

› [Airpher](#) /

› Airpher Cordless Stick Vacuum Cleaner User Manual

Airpher VC1

Airpher Cordless Stick Vacuum Cleaner User Manual

Model: VC1

INTRODUCTION

Thank you for purchasing the Airpher Cordless Stick Vacuum Cleaner. This manual provides essential information for the safe and efficient operation, maintenance, and troubleshooting of your new vacuum cleaner. Please read this manual thoroughly before first use and keep it for future reference.

SAFETY INFORMATION

- Always ensure the vacuum cleaner is turned off and unplugged before performing any maintenance or cleaning.
- Do not use the vacuum cleaner to pick up water, flammable liquids, or hot ashes.
- Keep hair, loose clothing, fingers, and all parts of the body away from openings and moving parts.
- Do not operate the vacuum cleaner with a damaged cord or plug.
- Store the vacuum cleaner indoors in a dry place.
- This appliance is for household use only.

PACKAGE CONTENTS

2025最新型自立式デザイン

いつでもどこでも立てるデザイン、掃除も収納も楽々



革新版大画面タッチ式
LEDディスプレイ



550W高速回転
****ブラシレスモーター****

より長寿命で高効率なパフォーマンスを実現。
静音性にも優れ、毎日の掃除が快適に。

The image above shows the Airpher Cordless Stick Vacuum Cleaner along with its various accessories, including different brush heads, filters, and the charging stand.

- Main Unit
- Detachable Battery
- Brush Head
- Roller Brush
- Crevice Nozzle
- Multi-purpose Nozzle
- Intake Filter
- Exhaust Filter
- Extendable Pipe
- Foldable Tube
- Adapter
- Dust Cup

- 2-in-1 Bracket (Charging Stand)
- Cleaning Tool

SETUP

Assembly

1. Attach the extendable pipe to the main unit until it clicks into place.
2. Connect the desired brush head (e.g., floor brush) to the other end of the extendable pipe.
3. Ensure the detachable battery is securely inserted into the main unit.

Charging the Battery

The Airpher vacuum cleaner offers multiple charging methods:

- **Direct Charging:** Connect the adapter directly to the main unit.
- **Charging Stand:** Place the vacuum cleaner onto the wireless charging bracket. The unit will automatically begin charging.
- **Detached Battery Charging:** Remove the battery from the main unit and charge it separately using the adapter.

革新バージョン ヘッドLEDライト

従来より4倍の微細なホコリを可視化、
掃除効率倍になる！



ホロリ可視化

普通のヘッドライト

光が白くてホコリを見つけにくい、
掃除時間2倍が掛かる！



ほとんど見えない

This image illustrates the three charging methods: direct charging, charging via the self-standing bracket, and charging the detached battery.

A full charge takes approximately 4.5 hours and provides up to 60 minutes of continuous operation, depending on the mode used.

OPERATING INSTRUCTIONS

Power On/Off and Mode Selection

Press the power button to turn the vacuum cleaner on or off. The LED display will show the current battery level and suction mode. You can switch between Eco, Middle, and Turbo modes with a single touch on the display to adjust suction power according to your cleaning needs.

7段階 サイクロン濾過システム



遠心分離式により、
99.99%の汚れを除去
する効率的な濾過を実現する

The LED display provides real-time information on battery status and selected suction mode (Eco, Middle, Turbo).

Flexible Cleaning with Foldable Tube and LED Lights

The vacuum cleaner features a unique foldable tube design, allowing you to easily clean under furniture without bending down. The brush head is equipped with four green LED lights that illuminate dark areas, making hidden dust and debris visible for thorough cleaning.

届かなかった場所に、手が届く。


折りたたみ式チューブで、狭い隙間もラクラクお掃除。
届かない“あの場所”にも、ストレスなくアプローチ。



もっと賢い液晶ディスプレイ

「表示する」だけでなく、「考える」液晶ディスプレイ。
スマート診断機能搭載、使うたびに安心をプラス。

- ✔ 異常を即通知
- ✔ 対処法がすぐ分かる
- ✔ 安心して使える
- ✔ サポート連携も簡単

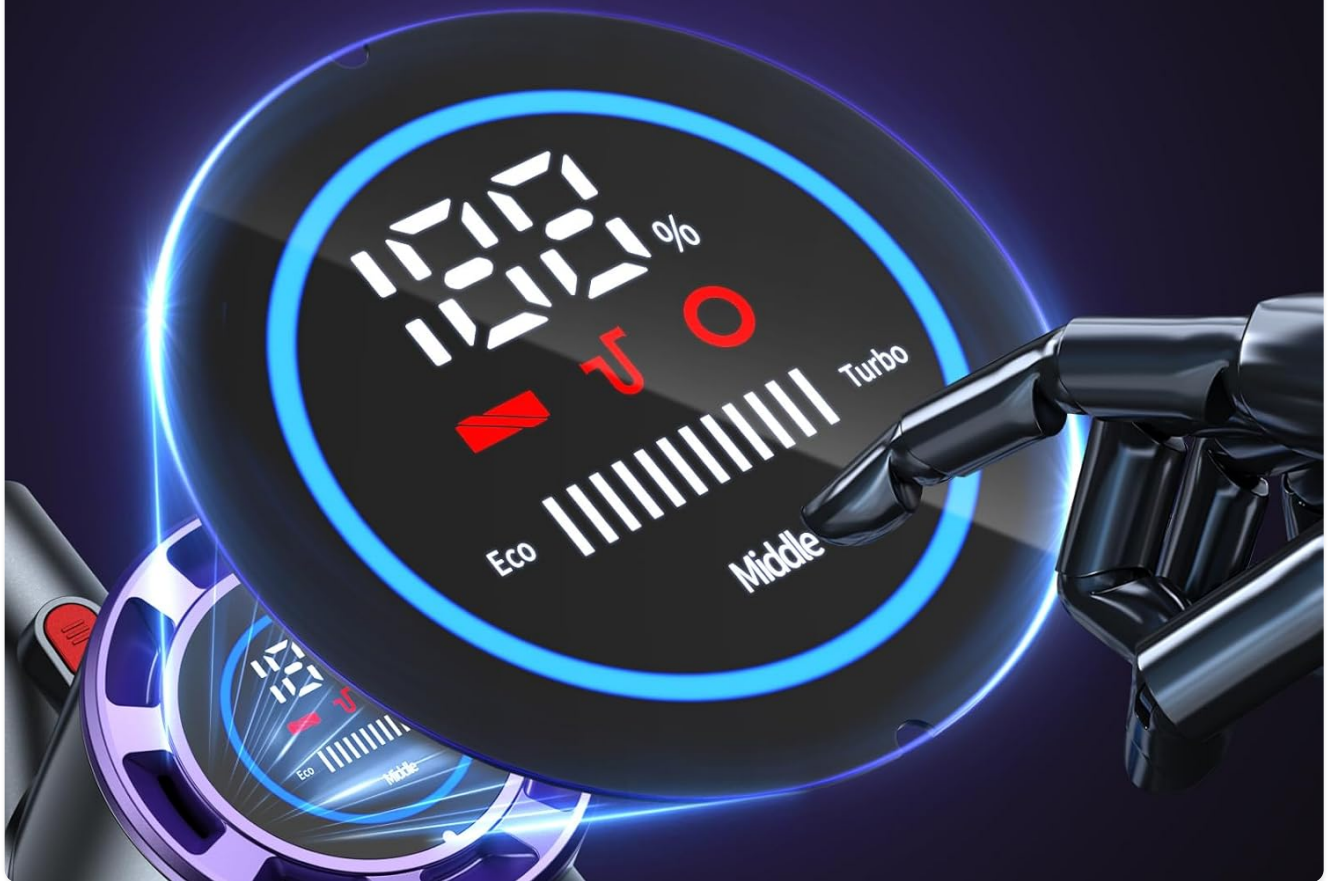

The left image demonstrates the foldable tube's ability to reach under low furniture. The right image highlights the green LED lights on the brush head, which make dust visible in dark spaces.

MAINTENANCE

Emptying the Dust Cup

To maintain optimal suction performance, empty the dust cup regularly, especially when it reaches the MAX fill line. The one-touch dust disposal feature allows for easy and hygienic emptying.

1. Hold the vacuum cleaner over a trash bin.
2. Press the dust cup release button to open the bottom flap and empty the contents.

Cleaning Filters

The HEPA filter and other filters should be cleaned periodically to ensure efficient operation. It is recommended to clean them once a month or as needed.

1. Twist and remove the dust cup from the main unit.
2. Remove the HEPA filter and other filter components from the dust cup.

3. Tap off loose dust. For thorough cleaning, rinse the filters under running water.
4. Allow all filter components to air dry completely for at least 24 hours before reassembling. Do not use a dryer or direct heat.



This image illustrates the four-step process for maintaining the vacuum cleaner: emptying the dust cup, disassembling filters, washing filters with water, and allowing them to dry completely.

Cleaning the Roller Brush

The tangle-free head design minimizes hair entanglement, but occasional cleaning of the roller brush may be necessary.

1. Turn off the vacuum cleaner and detach the brush head.
2. Locate the roller brush release mechanism and remove the roller brush.
3. Use the provided cleaning tool or scissors to cut and remove any tangled hair or debris.
4. Reinsert the roller brush and secure it in place.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Vacuum cleaner does not turn on.	Battery is not charged or not properly inserted.	Charge the battery fully. Ensure the battery is securely inserted.
Low suction power.	Dust cup is full, filters are clogged, or brush head is blocked.	Empty the dust cup. Clean or replace the filters. Remove any blockages from the brush head or pipe.
Brush head not rotating.	Hair or debris tangled in the roller brush, or brush head is not properly attached.	Clean the roller brush. Ensure the brush head is securely attached.
Short operating time.	Battery not fully charged, or operating in Turbo mode continuously.	Ensure battery is fully charged. Use Eco or Middle mode for longer runtime.

SPECIFICATIONS

Feature	Specification
---------	---------------

Feature	Specification
Brand	Airpher
Model Number	VC1
Suction Power	Max 55KPa
Motor Power	550W Brushless Motor
Continuous Operation Time	Up to 60 minutes
Charging Time	Approx. 4.5 hours
Battery Type	Lithium-ion
Filter Type	HEPA Filter
Noise Level	68 dB
Dust Cup Capacity	1 Liter
Dimensions (Packaged)	43.6 x 31.9 x 19.4 cm
Weight (Packaged)	3.5 kg

WARRANTY AND SUPPORT

This Airpher product comes with a **12-month warranty** from the date of purchase. If you encounter any issues or have questions regarding product use or exchange, please contact our customer support team.

Contact Information:

Email: support@airpher.jp

Alternatively, you can reach us through your Amazon account: Go to "Account Services" → "Order History" → Locate your order → Click on "Sold by [Seller Name]" → "Ask a question".

Please have your purchase details ready when contacting support to ensure a quicker resolution.