

Mpayel B8248

Mpayel 52-Inch Low Profile Flush Mount Ceiling Fan with Light (Model B8248) Instruction Manual

Model: B8248

1. IMPORTANT SAFETY INFORMATION

Please read and understand this entire manual before attempting to assemble, install, or operate this product. Failure to do so could lead to electric shock, fire, or serious injury.

- Always disconnect power at the main circuit breaker before installation or maintenance.
- Ensure all electrical connections comply with local codes and ordinances.
- Consult a qualified electrician if you are unsure about wiring or installation.
- The fan must be mounted to a structurally sound ceiling capable of supporting the fan's weight.
- Keep hands, clothing, and other objects clear of rotating fan blades.
- Do not operate the fan if any part is damaged.

2. PACKAGE CONTENTS

Verify that all components listed below are included in your package:

- Fan Body Assembly
- Canopy
- Receiver & Remote Control
- Blades (8 pieces)
- Blade Arms (4 pieces)
- Light Source (LED module)
- Lampshade
- Screws and Mounting Hardware
- Instruction Manual



Figure 2.1: Overview of all included components for the Mpayel ceiling fan.

3. INSTALLATION GUIDE

Follow these steps for proper installation of your Mpayel ceiling fan. It is recommended to have two people for installation.

1. **Prepare for Installation:** Turn off power at the main circuit breaker. Ensure the mounting location is secure and can support the fan's weight.
2. **Assemble Blades:** Attach the 8 fan blades to the blade arms using the provided screws. Note that the blades are reversible, offering a wood grain finish on one side and a solid black finish on the other.
3. **Attach Blade Assembly to Fan Body:** Secure the assembled blade arms to the fan body.
4. **Install Light Source and Lampshade:** Connect the LED light source to the fan body and then attach the lampshade.
5. **Mount Canopy:** Secure the canopy to the ceiling junction box.
6. **Wiring Connections:** Connect the fan's wiring to your household electrical system. Ensure correct connections for live (black), neutral (white), and ground (yellow/green) wires. Refer to the wiring diagram in the video for detailed instructions.
7. **Secure Fan to Canopy:** Carefully lift and attach the fan body assembly to the mounted canopy, ensuring all connections are secure.
8. **Final Checks:** Restore power and test the fan and light functions.

Your browser does not support the video tag.

Video 3.1: Detailed installation steps for the Mpayel Ceiling Fan. This video demonstrates the assembly of blades, light kit, and wiring connections to ensure proper setup.

DOUBLE-SIDED FAN BLADES DESIGN

Blade Arm

Side A: Wood color

Side B: Black color



CHOOSE DIFFERENT COLOR FOR DOUBLE-SIDED BALDES

28w

Energy-saving LED

90V-265V

Remote

Figure 3.1: Double-sided fan blades design, allowing choice between wood color (Side A) and black color (Side B).

52 INCH CEILING FANS WITH LIGHTS

Double-sided Color Fan Blades Design

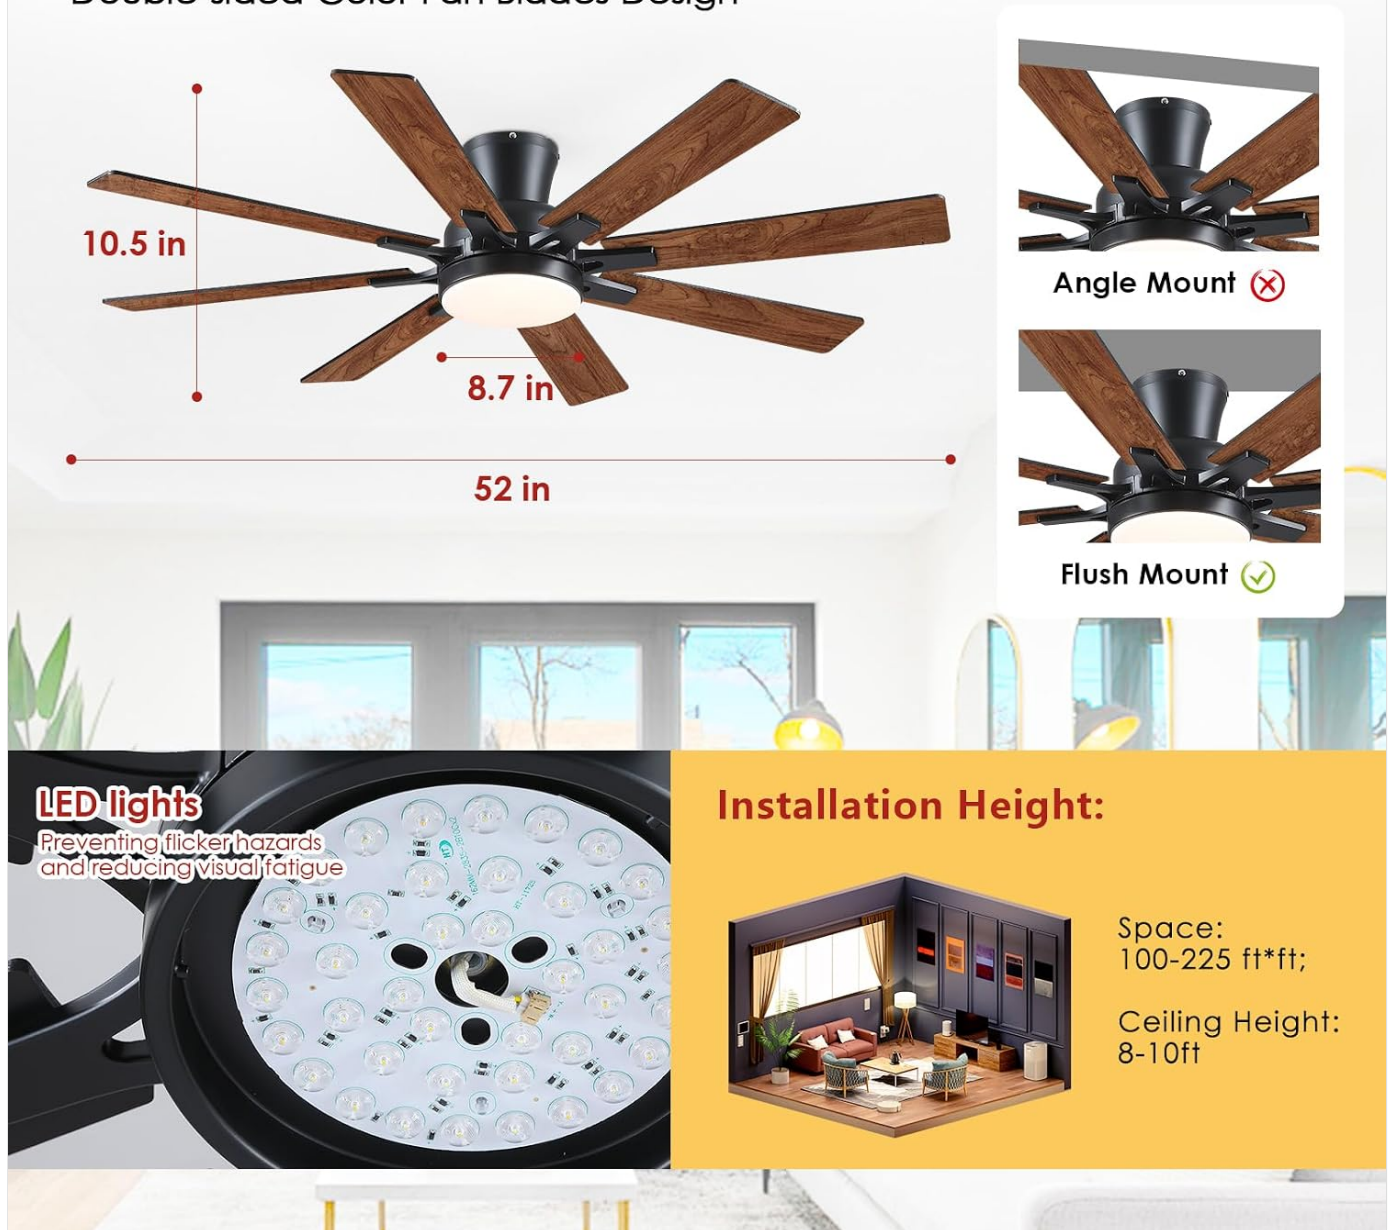


Figure 3.2: Fan dimensions (52 inches wide, 10.5 inches height) and recommended flush mount installation for ceiling heights of 8-10 feet.

4. OPERATING INSTRUCTIONS

Your Mpayel ceiling fan can be controlled via the included remote control or a dedicated mobile application.

4.1 Remote Control Operation

The remote control provides full functionality for your ceiling fan:

- **Power On/Off:** Use the dedicated power buttons for the fan and light.
- **Fan Speed:** Select from 6 adjustable wind speeds (1-2 for comfortable, 3-4 for natural, 5-6 for cool wind).
- **Light Control:** Turn the light on/off, adjust brightness (dimable from 10% to 100%), and change color temperature (2700K warm white, 4000K natural white, 6500K cool white). The light features a memory function.
- **Reversible Function:** Change the direction of the fan blades for summer (downward airflow for cooling) or winter (upward airflow for heat distribution).
- **Timer Setting:** Set a 2-hour timer for automatic fan shutdown.

52 INCH CEILING FAN

Ceiling Fan with Lights Remote Control



Figure 4.1: Remote control layout and functions for fan and light operation.



Figure 4.2: Reversible motor function for optimal air circulation in both summer and winter seasons.



Figure 4.3: Adjustable LED light with three color temperatures and dimmable brightness.

4.2 APP Control Operation

Control your fan conveniently from your smartphone using the "Fan Lamp Pro" application.

1. **Download App:** Scan the QR code provided in the manual or on the product packaging to download the "Fan Lamp Pro" app, or visit <https://www.jasonghost.com/fanlamppro/>.
2. **Enable Bluetooth:** Ensure Bluetooth is enabled on your smartphone.
3. **Pair Device:** Open the app, click "Add Device," select "Light Fan," and follow the on-screen instructions to pair. The fan light will blink twice to confirm a successful connection.
4. **Control Functions:** Once paired, you can adjust fan speed, dim lights, change light color temperature, and set the timer directly from the app interface.

Your browser does not support the video tag.

Video 4.1: Demonstration of the Mpayel Ceiling Fan's APP control features, including pairing and adjusting settings.





1. Scan the QR code to download the app
2. Add Device
3. Choose Light Fan
4. Click to Pair



Click the menu in the upper left corner to switch languages



Step 1: Click "+" button to set the name of your fan light



Step 2 Click the pair button 1-2 times within 5s after the fan is powered on.

Figure 4.4: Scan the QR code to download the Fan Lamp Pro app for smartphone control.

5. MAINTENANCE

Regular maintenance ensures optimal performance and longevity of your ceiling fan.

- **Cleaning:** Use a soft, damp cloth to clean the fan blades and light fixture. Do not use abrasive cleaners or solvents.
- **Blade Screws:** Periodically check and tighten all blade screws to prevent wobbling and noise.

- **Light Source:** The LED light source is designed for long life and typically does not require replacement. If issues occur, contact customer support.

6. TROUBLESHOOTING

If you experience issues with your Mpayel ceiling fan, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Fan does not start	No power, loose wiring, remote battery dead.	Check circuit breaker. Verify wiring connections. Replace remote battery.
Light does not work	No power, loose wiring, LED module issue.	Check circuit breaker. Verify wiring connections. Contact customer support if LED module is faulty.
Fan wobbles	Loose blade screws, unbalanced blades, improper mounting.	Tighten all blade screws. Ensure blades are balanced. Recheck mounting bracket.
Remote/App not responding	Remote battery dead, app not paired, Bluetooth off.	Replace remote battery. Re-pair app with fan. Ensure Bluetooth is active.
Fan is noisy	Loose screws, motor issue.	Check and tighten all screws. If noise persists, contact customer support.

7. SPECIFICATIONS

Feature	Detail
Brand	Mpayel
Model Number	B8248
Size	52 inches
Blade Count	8
Motor Type	DC Motor (Quiet Operation)
Control Method	Remote Control, APP Control
Light Source	LED (Dimmable, 3 Color Temperatures)
Wattage	28 watts
Timer Function	2-hour
Reversible Motor	Yes (Summer/Winter Mode)
Indoor/Outdoor Usage	Indoor

8. WARRANTY AND SUPPORT

Mpayel products are designed for quality and durability. For warranty information, technical support, or any questions regarding your ceiling fan, please contact Mpayel customer service through the retailer where the product was purchased or visit the official Mpayel store page on Amazon: [Mpayel Store](#).

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question