

[Manuals.plus](#) /

› [SABLUTE](#) /

› SABLUTE Wireless Keyboard User Manual

SABLUTE KN368

SABLUTE Wireless Keyboard User Manual

Model: KN368

INTRODUCTION

Thank you for choosing the SABLUTE Wireless Keyboard. This compact and versatile keyboard is designed for enhanced productivity and comfort, featuring 7-color backlighting, silent low-profile keys, and broad compatibility with Windows and Mac systems. This manual provides detailed instructions for setup, operation, maintenance, and troubleshooting to ensure optimal performance of your device.



Image: The SABLUTE Wireless Keyboard, showcasing its full layout with illuminated keys and the included USB and Type-C adapters.

WHAT'S IN THE BOX

- SABLUTE Wireless Keyboard
- USB Cable (for charging)
- Type-C Adaptor

- User Manual (this document)

SPECIFICATIONS

Product Dimensions	5.7 x 1.3 x 15.3 inches
Item Weight	1.28 pounds
Model Number	KN368
Batteries	1 Lithium Ion battery (included)
Compatible Devices	Laptop, PC, Smart TV
Connectivity Technology	2.4GHz Wireless USB Connection
Keyboard Description	Membrane, Scissor Switch Keys
Special Features	Portable, Lightweight, Backlit, Low-Profile Key, Quiet
Color	Silver
Number of Keys	102
Battery Capacity	1600mAh
Battery Life (no backlight)	Up to 350 hours
Wireless Range	Up to 33 ft

Slim & Portable Design

Lightweight Design, Commuter-Approved Convenience

0.27"



Holds organizer bags larger than or equal to **15"**



Image: Side view of the SABLUTE Wireless Keyboard highlighting its slim and portable design, measuring 0.27 inches thin.

SETUP

1. Charging the Keyboard

Before first use, fully charge the keyboard. Connect the provided USB cable to the keyboard's charging port and the other end to a USB power source (e.g., computer USB port, USB wall adapter). The charging indicator light will show the charging status.

Rechargeable & Long-Lasting

Full charge lasts: 350 hrs (no backlight)



150-200 Days
Standby Time



Smart
Sleep Mode



1600mAh
Battery Capacity

350_{hrs} Endurance



Tips: Sleeps after 2 mins idle, press any key to wake

Image: Close-up of the SABLUTE Wireless Keyboard's charging port, showing a USB-C cable connected, and indicating a 1600mAh battery capacity with up to 350 hours of endurance without backlight.

2. Connecting to Your Device

1. Locate the 2.4G USB receiver. It is typically stored in a compartment on the keyboard or included separately.
2. Plug the USB receiver into an available USB port on your computer or device. If your device only has USB-C ports, use the provided Type-C adaptor.
3. Turn on the keyboard using the ON/OFF switch, usually located on the side or back of the keyboard.
4. The keyboard should automatically connect to your device. No additional drivers are typically required for Windows or Mac systems.



Image: The SABLUTE Wireless Keyboard in use on a desk, illustrating its stable 2.4GHz wireless connection with a 33ft range, alongside a computer monitor and mouse.

3. Indicator Lights

The keyboard features several indicator lights to provide status information:

- **Win Indicator:** Lights up when the keyboard is in Windows layout mode.
- **Mac Indicator:** Lights up when the keyboard is in Mac layout mode.
- **Num Indicator:** Indicates Num Lock status.
- **Caps Indicator:** Indicates Caps Lock status.
- **Power Indicator:** Shows battery status (e.g., low battery, charging).

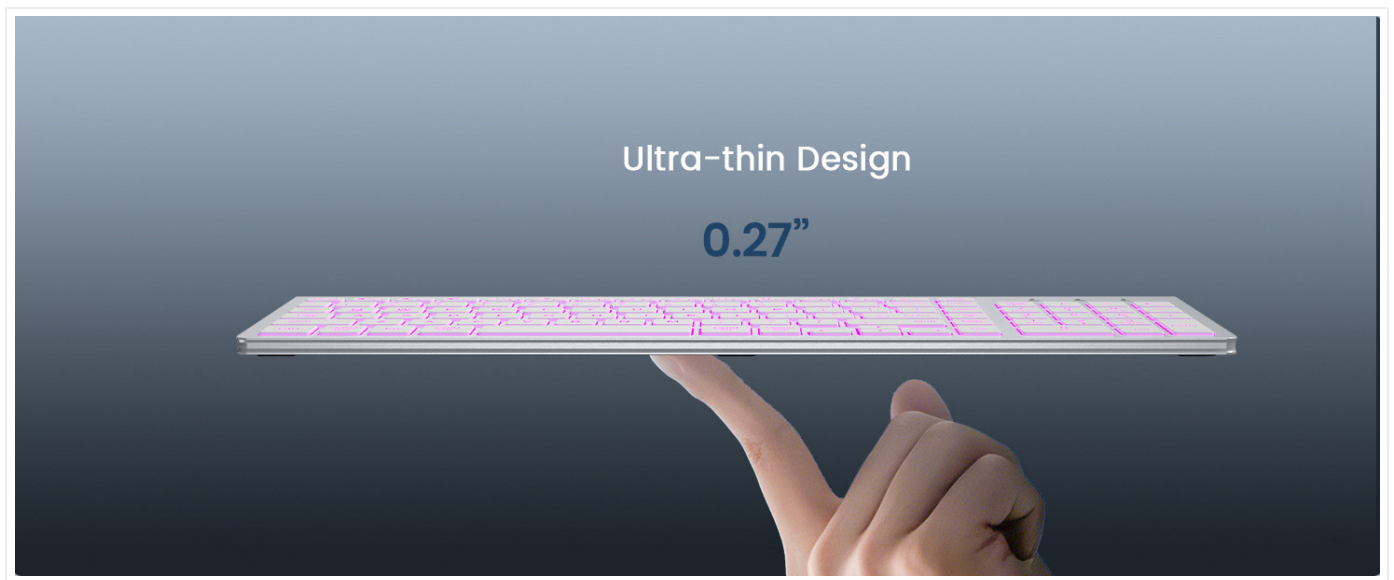


Image: Close-up view of the keyboard's indicator lights, showing Win, Mac, Num, Caps, and Power indicators, along with a visual of the USB-C and USB-A connection options.

OPERATING INSTRUCTIONS

Backlight Control

The keyboard features 7 switchable backlight colors and 3 brightness levels.

- To change backlight color: Press **Fn + Enter**. Repeat to cycle through the 7 available colors.
- To adjust brightness: Press **Fn + Shift**. Repeat to cycle through the 3 brightness levels or turn the backlight off.

7 Color Switchable Backlight



4 Lighting Levels



Image: Visual representation of the keyboard's 7 color switchable backlights and 4 lighting levels, demonstrating the effects of pressing Fn + Enter for color and Fn + Shift for brightness.

Operating System Switching

The keyboard supports both Windows and Mac layouts. Use the following shortcuts to switch between modes:

- For Windows layout: Press **Fn + Q**. The WIN/MAC indicator light will turn red.
- For Mac layout: Press **Fn + W**. The WIN/MAC indicator light will turn green.

2-IN-1 Win & Mac Layouts

Compatible with two operating systems at the same time



Image: Illustration showing the keyboard's 2-in-1 Windows and Mac layout compatibility, with visual cues for Fn+Q (Windows) and Fn+W (Mac) key combinations.

Function Keys (F1-F12)

The F1-F12 keys have dual functions. By default, they may perform multimedia actions. To use them as standard F-keys, press **Fn + ESC** to toggle the "Fn Lock" feature.

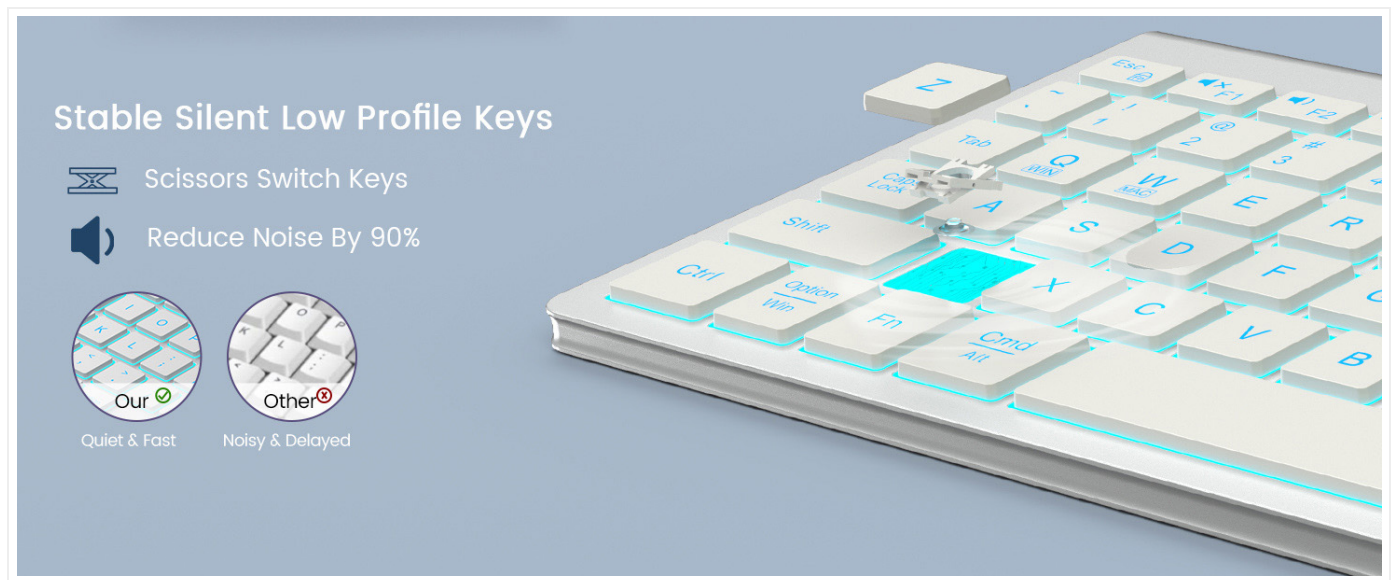


Image: Diagram showing the Fn + ESC key combination to enable one-key operation of F1-F12 multimedia function hotkeys, indicating the "Fn Lock" feature.

Typing Comfort and Quiet Operation

The keyboard features silent low-profile scissor switch keys designed to minimize typing noise by up to 95%, providing a quiet and comfortable typing experience similar to a laptop.



Image: Comparison illustrating the quiet operation of SABLUTE's scissor switch keys versus noisy, delayed alternatives, highlighting the silent design.

Ergonomic Design

The keyboard is designed with a built-in 7-degree tilt angle to promote a more natural and comfortable typing posture, reducing strain during extended use.

Fn+ESC, Enable One-key Operation of "F1-F12" Multimedia Function Hotkeys



Image: Side profile of the keyboard demonstrating its ergonomic 7-degree tilt angle, designed for comfortable typing.

Power Saving Mode

The keyboard is equipped with an auto-sleep mode to conserve energy. If idle for 2 minutes, the keyboard will enter sleep mode. Press any key to wake it up.

MAINTENANCE

- Keep the keyboard clean by wiping it with a soft, dry cloth.
- Avoid exposing the keyboard to liquids, excessive moisture, or extreme temperatures.
- Do not disassemble the keyboard, as this will void the warranty.
- Store the keyboard in a cool, dry place when not in use for extended periods.

TROUBLESHOOTING

Problem	Solution
Keyboard not responding	Ensure the keyboard is turned ON. Check if the USB receiver is securely plugged into the computer's USB port. Recharge the keyboard if the battery is low. Try plugging the USB receiver into a different USB port. Restart your computer.
Backlight not working or dim	Press Fn + Shift to adjust brightness levels. Ensure the keyboard is sufficiently charged.
Keys typing incorrect characters (Windows/Mac)	Ensure the keyboard is set to the correct operating system layout. Press Fn + Q for Windows or Fn + W for Mac.
Lag or intermittent connection	Ensure the keyboard is within the 33 ft wireless range of the receiver. Avoid placing the keyboard near strong interference sources (e.g., other wireless devices, large metal objects). Try moving the USB receiver to a front USB port if using a desktop PC.

WARRANTY AND SUPPORT

SABLUTE provides a 90-day replacement policy and a 360-day manufacturer warranty for this product. For any issues or inquiries, please contact SABLUTE customer support.

SABLUTE USA Customer Service:

- Phone: 1-888-905-9607 (US)
- Operating Hours: Mon-Fri 9am-1pm PST, 2pm-6pm PST



Image: SABLUTE customer support details, including 24-hour reply, 90-day replacement, 360-day manufacturer warranty, and brand care, along with the US phone number and operating hours.

