

## CrossBeats Lumex Cine

# Crossbeats Lumex Cine Smart Home Projector User Manual

Model: Lumex Cine

## 1. INTRODUCTION

Thank you for choosing the Crossbeats Lumex Cine Smart Home Projector. This manual provides essential information for setting up, operating, and maintaining your projector to ensure optimal performance and longevity. Please read this manual thoroughly before use and retain it for future reference.



Image 1.1: Crossbeats Lumex Cine Smart Home Projector and Remote Control.

## 2. SAFETY INFORMATION

To prevent fire, electric shock, or injury, always follow these basic safety precautions:

- Do not block ventilation openings. Ensure adequate space around the projector for proper airflow.
- Do not expose the projector to rain or moisture.
- Avoid looking directly into the projector lens when the lamp is on, as it can cause eye damage.
- Use only attachments/accessories specified by the manufacturer.
- Unplug the projector during lightning storms or when unused for long periods.
- Refer all servicing to qualified service personnel.

## 3. PACKAGE CONTENTS

Verify that all items are present in your package:

- Crossbeats Lumex Cine Projector
- Remote Control
- Power Cord
- User Manual

- Cleaning Kit
- Warranty Card

## 4. PRODUCT OVERVIEW

---

The Crossbeats Lumex Cine is a smart home projector featuring Native 1080p resolution with 4K support, 16000 lumens brightness, and an integrated Android OS for direct streaming. It includes advanced features like auto focus, auto keystone correction, and a built-in speaker.

### Key Features:

- **Native 1080P Resolution with 4K Support:** Delivers clear and detailed images.
- **16000 Lumens Brightness:** Provides vibrant visuals in various lighting conditions.
- **Android OS with Built-in Apps:** Access streaming services like Netflix, Prime Video, and YouTube directly.
- **Auto Focus & Auto Keystone:** Automatic image adjustment for quick setup.
- **Built-in 15W Speaker:** Integrated audio solution.
- **Multi-Connectivity:** HDMI, USB, Bluetooth, Wi-Fi.

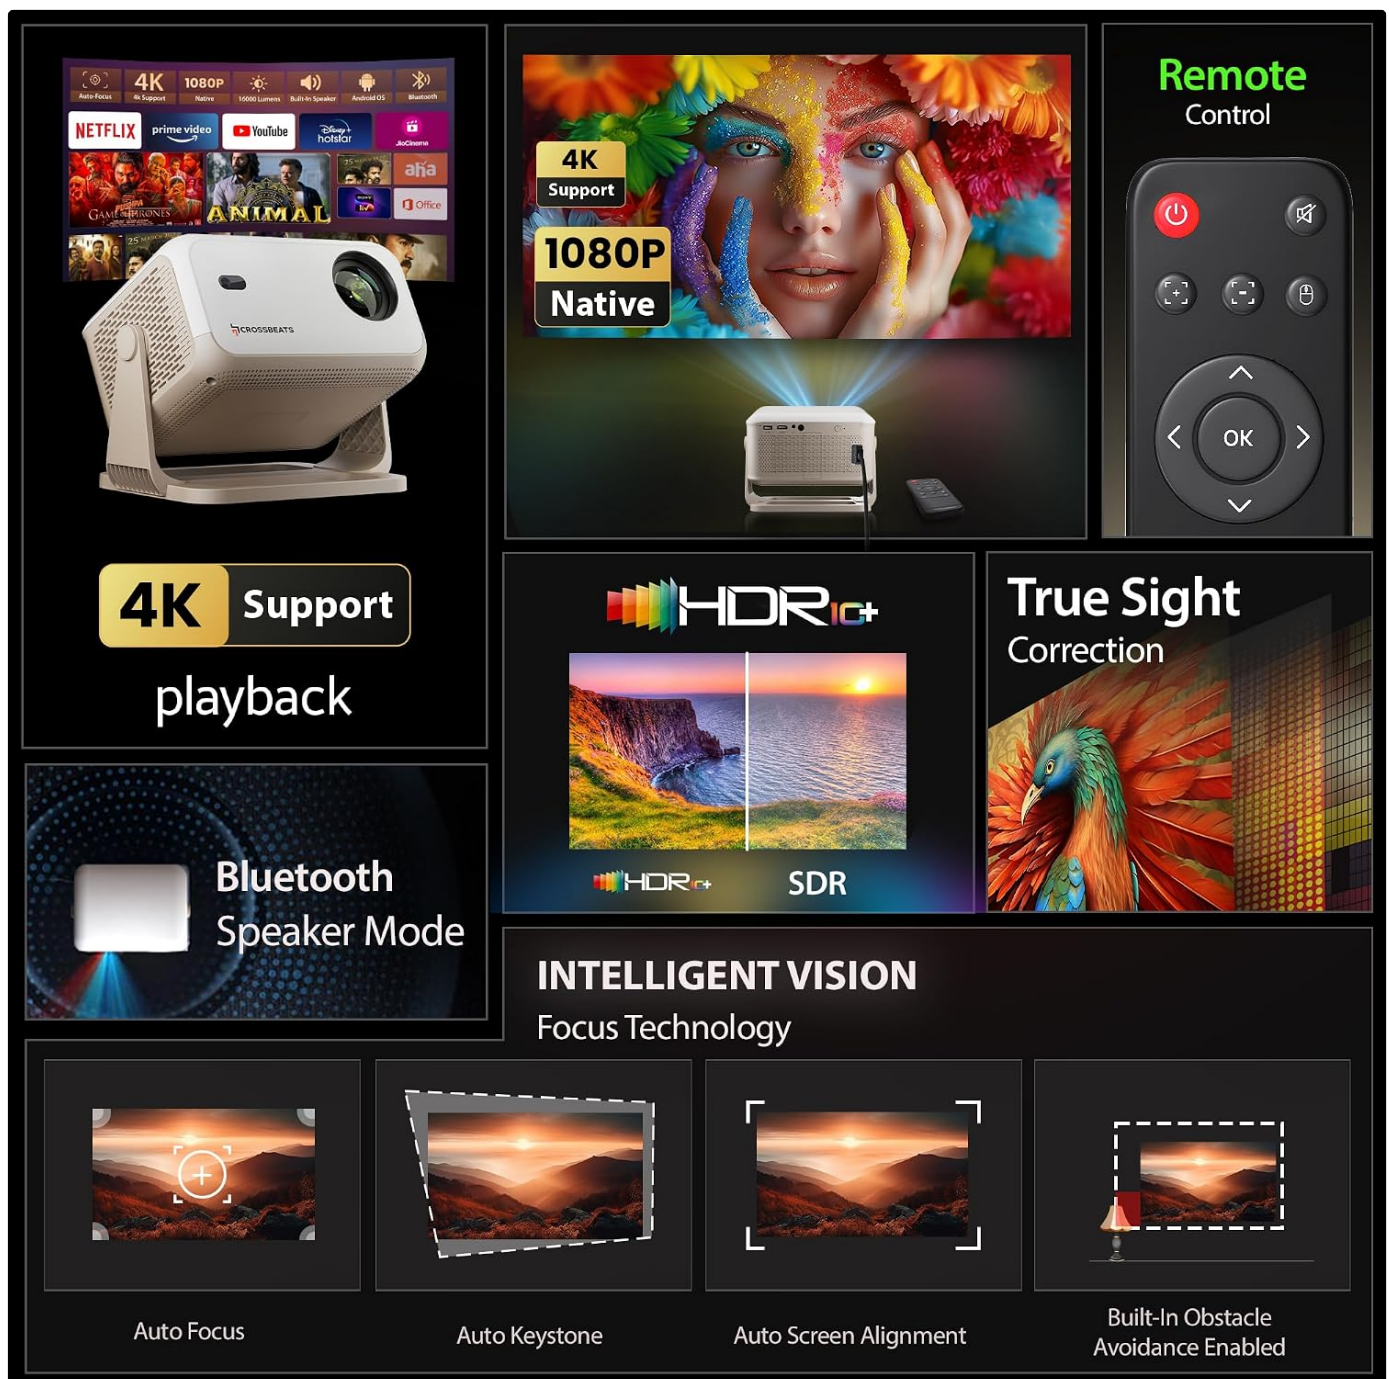


Image 4.1: Overview of Lumex Cine Projector Features.

## 5. SETUP

### 5.1 Placement

Place the projector on a stable, flat surface. Ensure the projection path is clear of obstructions. The projector supports tabletop, ceiling, and wall mounting. For optimal viewing, position the projector perpendicular to the screen or wall.



Image 5.1: Projector with 135° Vertical Adjustment.



Image 5.2: Projector with 360° Horizontal Adjustment.

## 5.2 Power Connection

1. Connect the power cord to the projector's power input.
2. Plug the other end of the power cord into a power outlet.
3. Press the power button on the projector or remote control to turn it on.

## 5.3 Image Adjustment (Auto Focus & Keystone)

The Lumex Cine projector features automatic focus and keystone correction for a clear, rectangular image.

- **Auto Focus:** The projector will automatically adjust the image clarity upon startup or movement.
- **Auto Keystone:** The projector will automatically correct distorted images to a rectangular shape.
- **Manual Adjustment:** If needed, use the remote control to fine-tune focus or keystone settings in the projector's menu.



Image 5.3: AI Projection Auto Focus in action.



Image 5.4: Automatic Keystone Correction.

## 5.4 Auto Screen Alignment & Obstacle Avoidance

The projector can automatically align the image to your screen and avoid obstacles on the projection surface.



Image 5.5: Auto Screen Alignment.

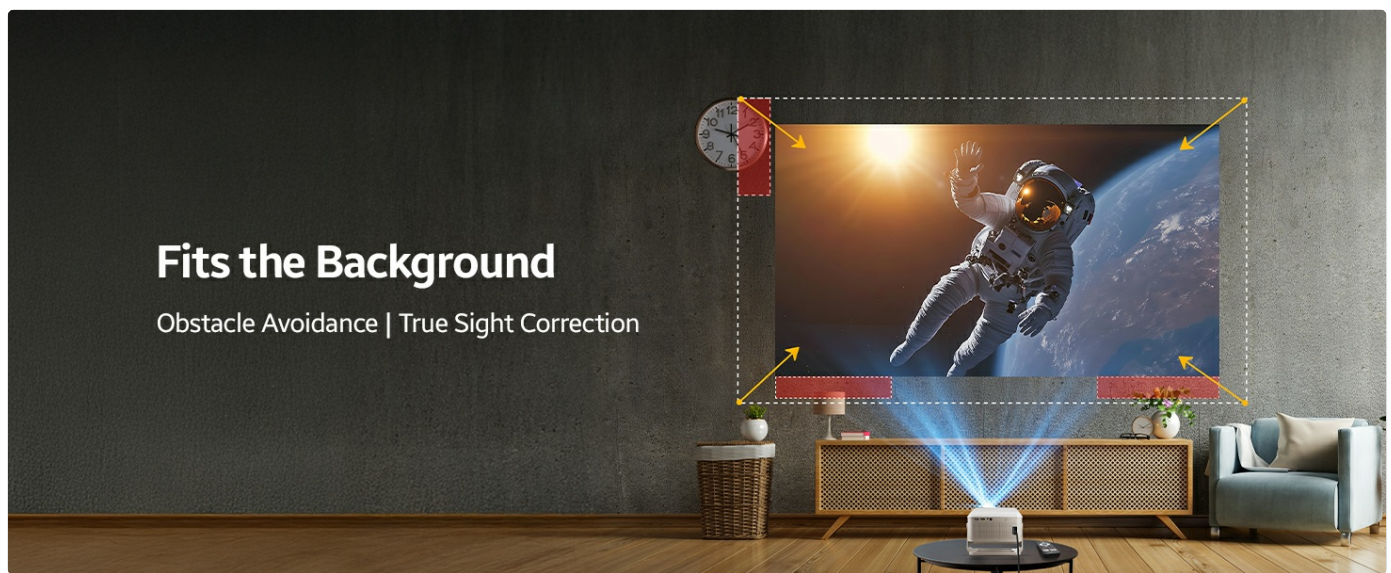


Image 5.6: Obstacle Avoidance and True Sight Correction.

## 6. OPERATING INSTRUCTIONS

### 6.1 Navigation and Android OS

The projector runs on Android OS, providing a smart interface. Use the included remote control to navigate menus, select apps, and adjust settings.



Image 6.1: Remote Control and Android OS Interface.

### 6.2 Streaming Applications

Access pre-installed streaming applications such as Netflix, Prime Video, and YouTube directly from the home screen. Ensure the projector is connected to Wi-Fi for internet access.

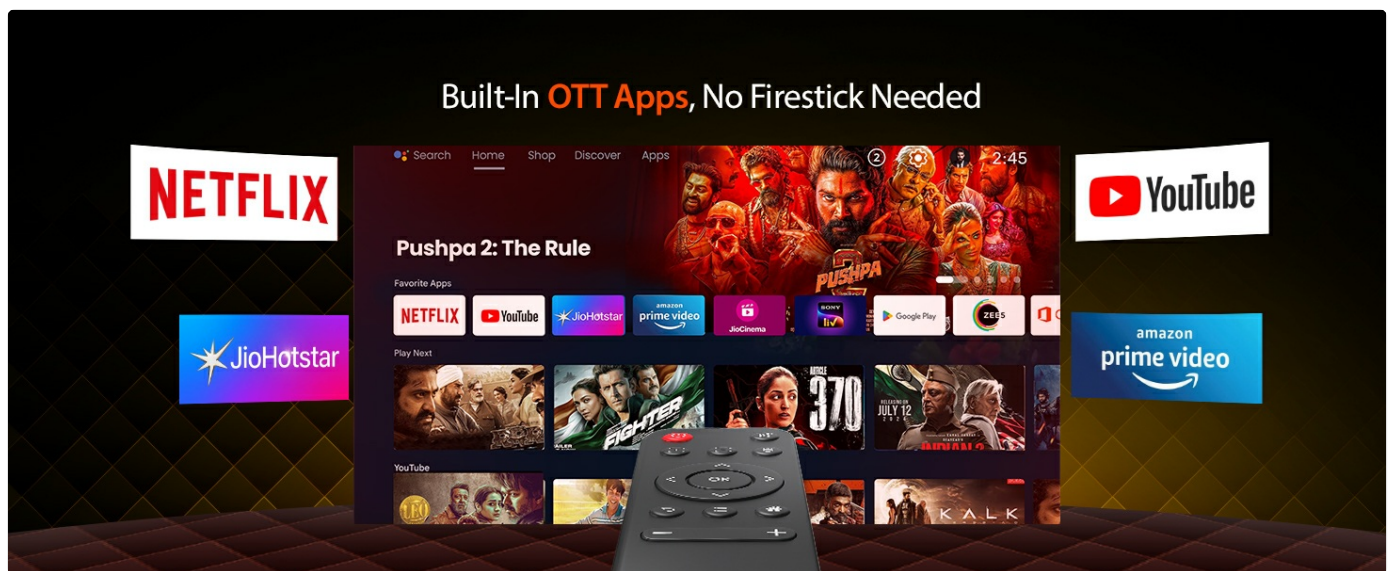


Image 6.2: Built-in OTT Applications.

## 6.3 Connecting External Devices

The projector offers multiple connectivity options:

- **HDMI:** Connect gaming consoles, laptops, or other HDMI-enabled devices.
- **USB:** Play media files (photos, videos, music, documents) directly from a USB drive.
- **Bluetooth:** Connect external Bluetooth speakers or headphones for enhanced audio.
- **Wi-Fi:** Connect to your home network for internet access and screen mirroring from smartphones/tablets.

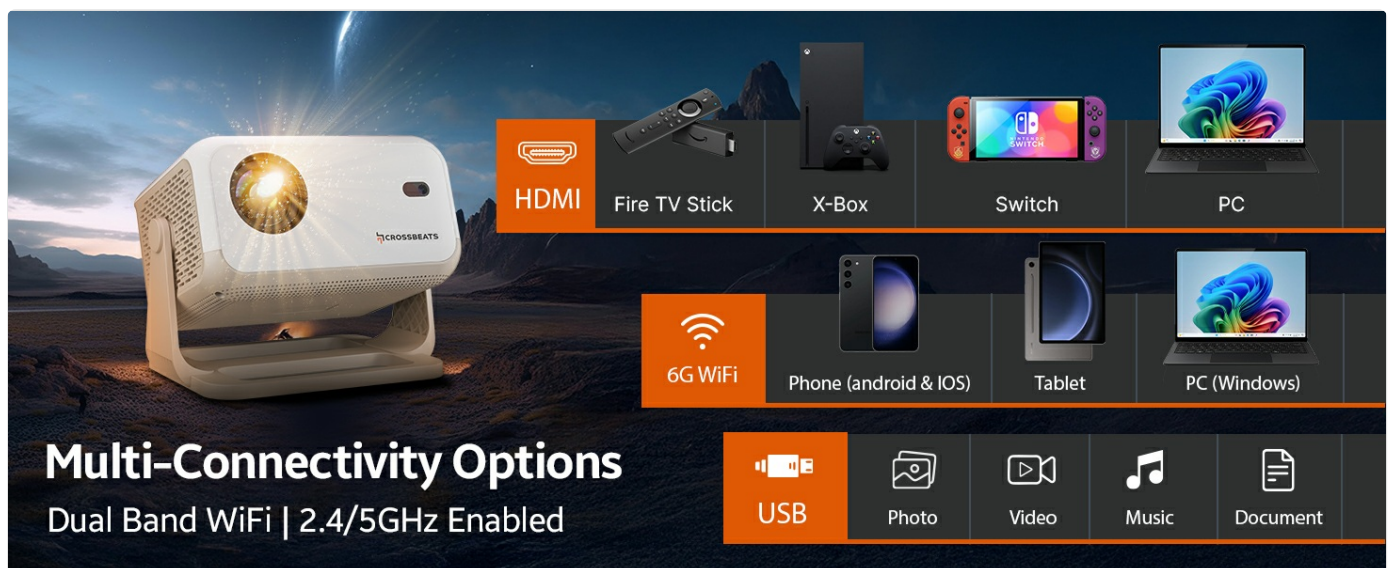


Image 6.3: Multi-Connectivity Options.

## 6.4 Audio Output

The projector has a built-in 15W speaker. For a more immersive audio experience, connect external Bluetooth speakers.

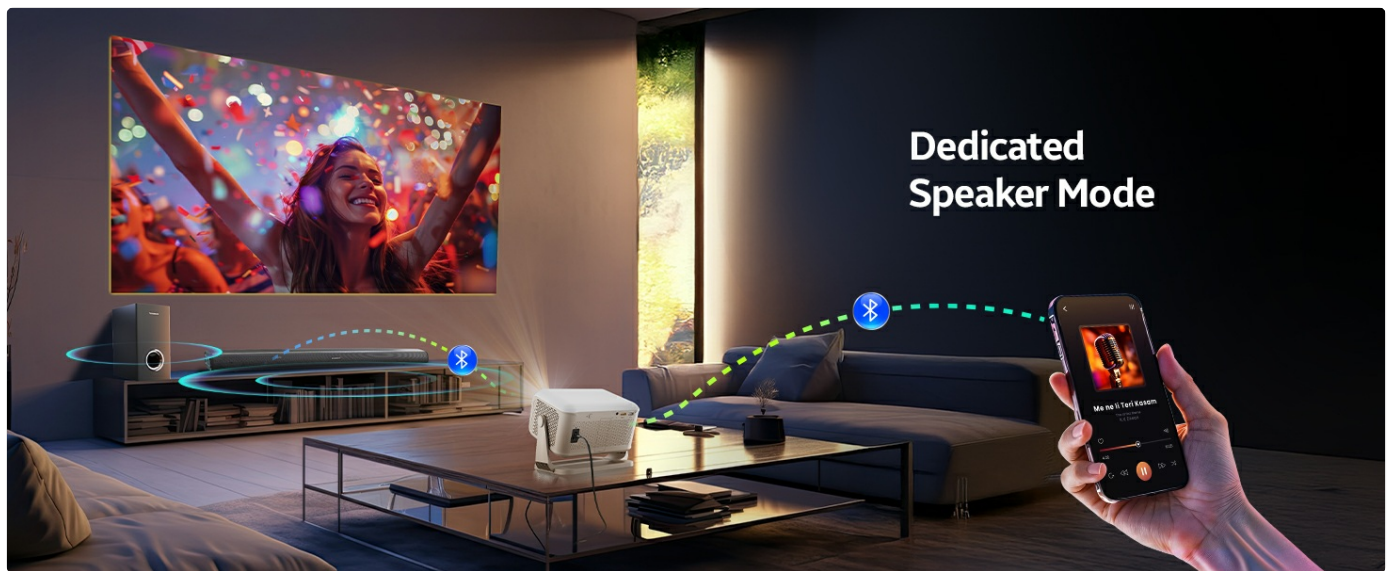


Image 6.4: Dedicated Speaker Mode via Bluetooth.

## 6.5 Digital Zoom

Adjust the screen size digitally from 35% to 100% using the remote control, without moving the projector.

# 7. MAINTENANCE

## 7.1 Cleaning the Lens

Use the provided cleaning kit or a soft, lint-free cloth specifically designed for optical lenses. Gently wipe the lens in a circular motion. Avoid using abrasive cleaners or excessive force.

## 7.2 Cleaning the Projector Body and Vents

Wipe the projector's exterior with a soft, dry cloth. Use a small brush or compressed air to clear dust from the ventilation openings to prevent overheating.

## 7.3 Storage

When not in use for extended periods, store the projector in a cool, dry place, away from direct sunlight and extreme temperatures. Cover it to protect against dust.

# 8. TROUBLESHOOTING

If you encounter issues, refer to the following common problems and solutions:

- **No Power:** Ensure the power cord is securely connected to both the projector and a working power outlet. Try a different outlet.
- **No Image:** Check input source selection. Ensure HDMI cables are properly connected. Verify the lens cap is removed.
- **Blurry Image:** Allow auto-focus to complete. If still blurry, manually adjust focus via the menu. Ensure the projection surface is flat.
- **Distorted Image:** Allow auto-keystone to correct. If needed, manually adjust keystone settings.
- **No Sound:** Check volume levels on both the projector and connected devices. Ensure external speakers are properly connected or paired via Bluetooth.
- **Remote Not Working:** Replace batteries. Ensure no obstructions between the remote and the projector's IR receiver.

- **Wi-Fi Connectivity Issues:** Ensure the projector is within range of your Wi-Fi router. Restart the projector and router.

## 9. SPECIFICATIONS

| Feature              | Specification                                                                                                                   |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Brand                | CrossBeats                                                                                                                      |
| Model                | CINE                                                                                                                            |
| Display Technology   | 4K Support, DLP, LCD                                                                                                            |
| Display Type         | LED                                                                                                                             |
| Native Resolution    | 1920 x 1080 (Full HD)                                                                                                           |
| Supported Resolution | Up to 3840 x 2160 (4K)                                                                                                          |
| Image Brightness     | 16000 Lumens (Marketing Value, Actual ANSI Lumens may vary)                                                                     |
| Image Contrast Ratio | 22000:1                                                                                                                         |
| Aspect Ratio         | 16:9                                                                                                                            |
| Operating System     | Android OS                                                                                                                      |
| Special Features     | Android OS with OTT apps (Netflix, Prime, Youtube), Auto Focus, Built-In Speaker, Digital Keystone Correction, Rotatable Design |
| Connectivity         | Bluetooth, HDMI, USB, Wi-Fi (Dual Band 2.4/5GHz)                                                                                |
| Built-in Speaker     | 15W                                                                                                                             |
| Product Dimensions   | 21 x 12 x 12 cm                                                                                                                 |
| Item Weight          | 1.4 kg                                                                                                                          |
| RAM/ROM              | 1GB RAM / 8GB ROM                                                                                                               |

## 10. WARRANTY AND SUPPORT

### 10.1 Warranty Information

The Crossbeats Lumex Cine Projector typically comes with a 1-year manufacturer's warranty from the date of purchase. Please refer to the included Warranty Card for specific terms and conditions. Keep your purchase receipt as proof of purchase for warranty claims.

## 10.2 Customer Support

For technical assistance, troubleshooting beyond this manual, or warranty inquiries, please contact Crossbeats customer support. Contact details can usually be found on the official Crossbeats website or on your warranty card.

When contacting support, please have your product model (Lumex Cine) and purchase details ready.

© 2025 CrossBeats. All rights reserved.

### ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

#### Name

Anonymous

#### Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

#### Question

Example: How do I reset this device or fix this error?

#### Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question