

[Manuals.plus](#) /

› [Lucande](#) /

› Lucande 10020397 Dimmable Remote Control Modern Gold Aluminum Pendant Light User Manual

Lucande 10020397

Lucande 10020397 Dimmable Remote Control Modern Gold Aluminum Pendant Light User Manual

Model: 10020397

Brand: Lucande

PRODUCT OVERVIEW

The Lucande Melinay LED pendant light, model 10020397, is a modern lighting fixture designed for indoor use. It features a gold-colored aluminum construction and integrated LED lighting. This fixture offers dimmable functionality and can be controlled via a remote control or the Tuya app. It is suitable for various rooms such as living rooms, dining rooms, bedrooms, kitchens, and hallways.



Image 1: Lucande 10020397 Gold Aluminum Pendant Light. This image shows the complete pendant light fixture, highlighting its oval shape and gold finish.

SAFETY INSTRUCTIONS

- Ensure the power supply is disconnected before installation, maintenance, or cleaning.
- Installation should be performed by a qualified electrician in accordance with local wiring regulations.
- Do not modify the product in any way.
- This product is designed for indoor use only (IP20 protection type).
- Keep out of reach of children.

PACKAGE CONTENTS

- Lucande 10020397 Pendant Light Fixture
- Integrated LED Lamp (51W total)
- Remote Control
- Mounting Hardware



Image 2: Components of the Lucande 10020397 pendant light. This image displays the main light body, suspension wires, and the ceiling mount component.

SETUP AND INSTALLATION

1. **Preparation:** Ensure the power supply to the installation area is turned off at the main circuit breaker. Gather necessary tools (e.g., screwdriver, drill, wire strippers).
2. **Mounting the Ceiling Base:** Secure the ceiling mount bracket to the ceiling using appropriate screws and anchors. Ensure it is firmly attached to a structural support.
3. **Wiring:** Connect the fixture's wires to the household electrical wires. Typically, this involves connecting live (L), neutral (N), and ground (E) wires. Refer to local electrical codes for proper wiring procedures.
4. **Attaching the Fixture:** Carefully attach the main light body to the ceiling base. Adjust the suspension cables to the desired height (maximum 250 cm).
5. **Final Check:** Once installed, restore power and test the light fixture.



Image 3: Dimensional diagram of the Lucande 10020397 pendant light, showing length (110 cm), width (32 cm), height (4.5 cm), and maximum suspension length (250 cm).

OPERATING INSTRUCTIONS

Using the Remote Control:

The included remote control allows for convenient operation of the pendant light.

- **Power On/Off:** Press the power button to turn the light on or off.
- **Dimming:** Use the brightness control buttons (usually '+' and '-') to adjust the light intensity.

Using the Tuya App:

1. **Download App:** Download the Tuya Smart app from your device's app store.
2. **Register/Login:** Create an account or log in to the Tuya Smart app.
3. **Add Device:** Follow the in-app instructions to add a new device. This typically involves putting the light into pairing mode (often by cycling power) and connecting it to your Wi-Fi network.
4. **Control:** Once connected, you can control the light's power and dimming directly from the app.

MAINTENANCE

- **Cleaning:** Disconnect power before cleaning. Wipe the fixture with a soft, dry cloth. Do not use abrasive cleaners or solvents.
- **LED Replacement:** The LED lamp is integrated and not user-replaceable. If the LED fails, contact customer support for assistance.
- **Inspection:** Periodically check the suspension cables and electrical connections for any signs of wear or damage.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Light does not turn on.	No power supply; loose wiring; remote control battery low.	Check circuit breaker. Verify wiring connections. Replace remote control batteries.
Light flickers.	Unstable power supply; loose connection.	Ensure stable power. Check wiring connections.
Remote control not working.	Batteries depleted; remote out of range; pairing issue.	Replace batteries. Ensure remote is within operating range. Re-pair remote if necessary.
Cannot connect to Tuya App.	Incorrect Wi-Fi password; light not in pairing mode; network issues.	Verify Wi-Fi credentials. Put light into pairing mode (usually by cycling power). Check Wi-Fi signal strength.
Light is not dimming.	Incorrect remote button; app setting issue.	Ensure correct dimming buttons are used. Check dimming settings in the Tuya app.

SPECIFICATIONS

Feature	Detail
Model Number	10020397
Brand	Lucande
Material	Aluminum
Color	Gold
Dimensions (L x W x H)	110 cm x 32 cm x 4.5 cm
Weight	2.7 kg
Light Source	Integrated LED
Total Wattage	51 W

Feature	Detail
Luminous Flux	5700 lm
Color Temperature	3000 Kelvin
Voltage	230 Volt
Protection Type	IP20
Protection Class	II
Style	Modern
Control	Remote Control, Tuya App
Energy Label	EPREL Database Link

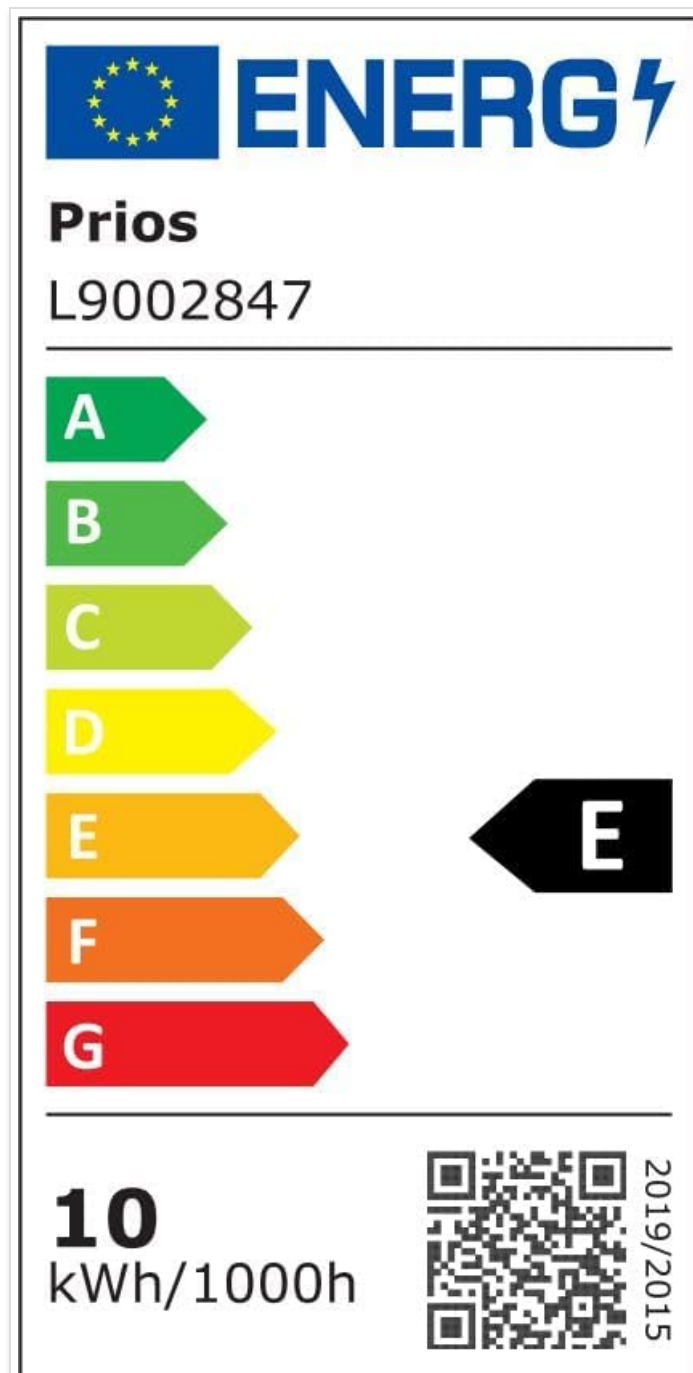


Image 4: Energy efficiency label for the Lucande 10020397 pendant light, showing class E.

WARRANTY AND SUPPORT

This Lucande product is manufactured to high-quality standards. For warranty information or technical support, please contact your retailer or visit the official Lucande website.

Lucande is committed to customer satisfaction and quality.

For further assistance, you may visit the Lucande store on Amazon: [Lucande Amazon Store](#)