

Alaga B0F37NCDG3

Alaga 5G Indoor Camera for Home Security User Manual

Model: B0F37NCDG3

Brand: Alaga

INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your Alaga 5G Indoor Camera for Home Security. Please read this manual thoroughly before using the product to ensure proper functionality and safety. Keep this manual for future reference.

WHAT'S IN THE BOX

Verify that all components are present in the package:

- Camera Body
- Charging Cable
- Instruction Manual
- Mounting Screw
- Power Adapter

Install Anywhere, Cover Everywhere

Easily mount this compact security camera on a desk, wall, or ceiling.



Image: Contents of the Alaga 5G Indoor Camera package, including the camera, power adapter, charging cable, mounting screws, and instruction manual.

SPECIFICATIONS

Feature	Description
Model	B0F37NCDG3
Resolution	2K (3 MP Maximum Webcam Image Resolution)
Connectivity	Dual-Band Wi-Fi (2.4GHz & 5GHz), Bluetooth
Night Vision Range	Up to 30 feet (Infrared)
Audio	2-Way Audio (Built-in microphone and speaker)
Detection	AI Motion Detection, Human Presence Detection
Storage	Micro SD Card (up to 256GB, not included), Cloud Storage (optional)
Voice Control	Works with Amazon Alexa, Google Assistant
Power Source	Corded Electric
Mounting Type	Freestanding, Ceiling Mount
Dimensions	1.97 x 2.76 x 4.46 inches
Weight	6.7 ounces

Multi-View of Monitoring Born for Family



Image: The Alaga indoor camera highlighting features such as 2K resolution, 2-way audio, 5G & 2.4 GHz WiFi, motion detection, real-time alerts, infrared night vision, SD card/cloud storage, 3x digital zoom, and compatibility with Alexa and Google.

SETUP

1. Powering the Device

1. Connect the charging cable to the camera's power port.
2. Plug the power adapter into a standard electrical outlet.
3. The camera will power on automatically.

2. App Download and Connection

To set up your camera, you will need to download the companion application.

1. Download the "**CareCam Pro**" app from your smartphone's app store (Apple App Store or Google Play Store).
2. Ensure Bluetooth is enabled on your smartphone.

3. Open the CareCam Pro app and follow the on-screen instructions to add a new device. Select your camera model from the list.

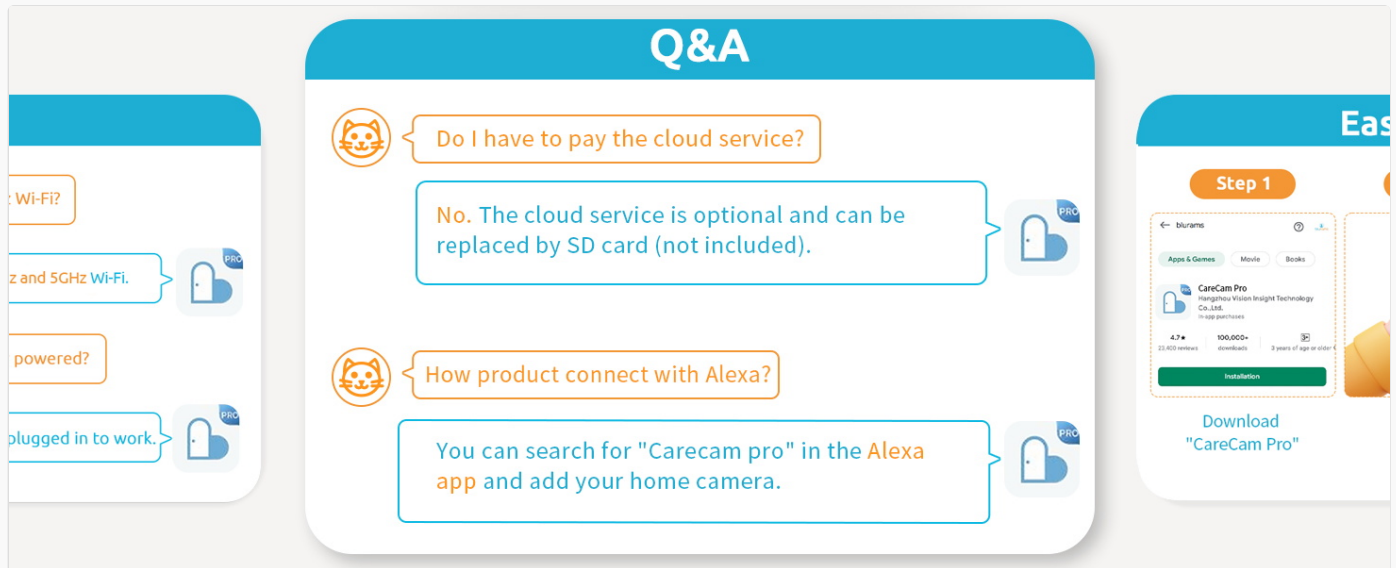


Image: A visual guide showing three steps for easy setup: downloading the "CareCam Pro" app, turning on Bluetooth, and adding the device to connect.

3. Wi-Fi Connection

The camera supports both 2.4GHz and 5GHz Wi-Fi networks for stable and flexible connectivity.

- During the app setup process, you will be prompted to select your Wi-Fi network and enter the password.
- Choose the network that provides the best signal strength in your desired camera location.

Dual-Band WiFi

Enhanced network strength & greater coverage distance



Image: The Alaga indoor camera positioned between large 2.4 GHz and 5 GHz symbols, indicating its dual-band Wi-Fi capability for enhanced network strength and coverage.

Crystal Clear Vision in Total Darkness

With advanced night vision, the Indoor Camera keeps your home in clear view 24/7 — even in total darkness.



Image: An illustration of a home layout demonstrating how dual-band Wi-Fi (2.4GHz and 5GHz) provides fast and reliable connectivity for two Alaga

cameras, ensuring smooth streaming without buffering or lag.

4. Mounting Options

The camera can be placed freestanding on a flat surface or mounted to a ceiling or wall.

- **Freestanding:** Place the camera on a stable, flat surface such as a desk or shelf.
- **Ceiling/Wall Mount:** Use the included mounting screws to secure the camera to a desired location. Ensure the mounting surface is sturdy enough to support the camera.

Share the View, Share the Joy

Enjoy live viewing together and easily share heartwarming moments with loved ones—anytime, anywhere.



Image: The compact Alaga security camera displayed in various installation scenarios, including freestanding on a desk, mounted on a wall, and inverted for ceiling mounting, illustrating its versatility.

OPERATING INSTRUCTIONS

1. Live View

Access the live video feed of your camera through the CareCam Pro app on your smartphone.



Image: A smartphone screen showing a live video feed from the Alaga 5G Indoor Camera, capturing a child running into a home, demonstrating real-

time monitoring capabilities.

2. Two-Way Audio

The camera features a built-in microphone and speaker, allowing for two-way communication.

- In the live view interface of the app, tap the microphone icon to speak through the camera.
- Tap the speaker icon to listen to audio from the camera's location.

Keep Your Child Within Sight at All Times



Two-way talk



Infrared night vision

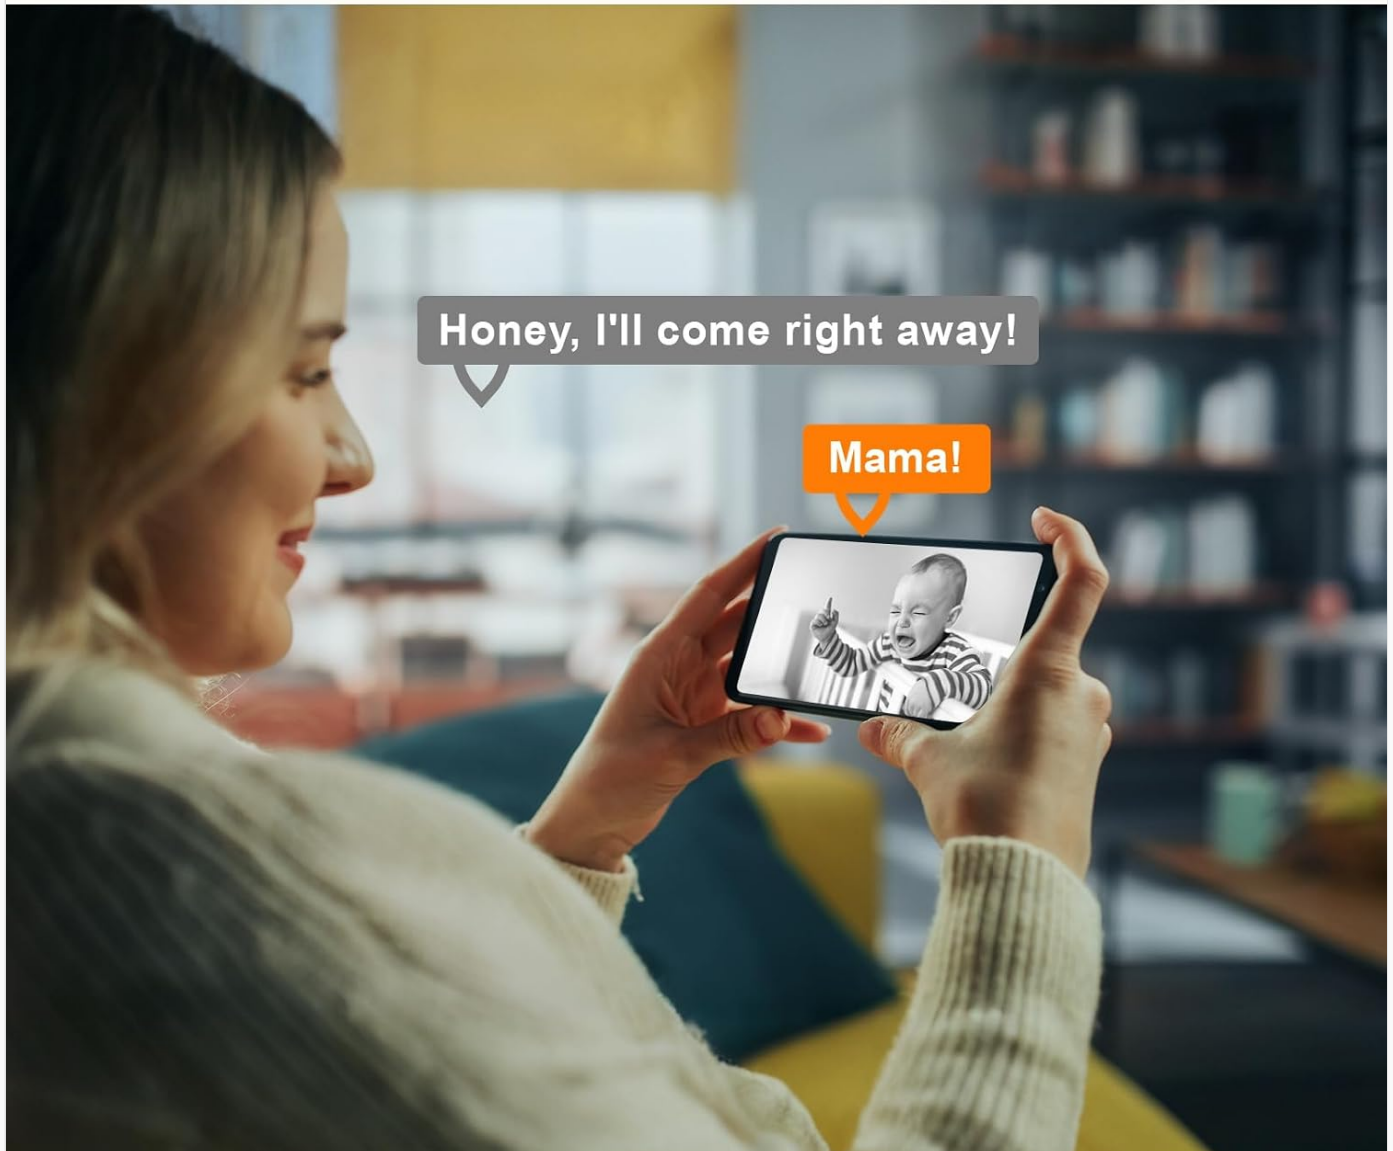


Image: A woman viewing a baby monitor feed on her smartphone, with text bubbles indicating two-way communication: 'Honey, I'll come right away!' and 'Mama!', demonstrating the camera's two-way talk feature.



Image: Two children under a blanket looking at a tablet, with speech bubbles indicating two-way audio communication: 'Uh oh!' and 'It's time to sleep, baby!', illustrating the camera's ability to keep you connected.

3. Motion Detection & Alerts

The camera is equipped with AI motion detection and human presence detection to notify you of activity.

- Enable motion detection in the app settings.
- You will receive instant push notifications on your smartphone when motion or human presence is detected.
- Adjust sensitivity settings within the app to minimize false alerts.

Accurate Human Detection



Person Detection



Instant Notification



Image: A baby reaching for a cabinet, with an overlay showing a notification: 'Motion Detection: Your camera "BLE_CAM" noticed some activity. Please check up soon!', highlighting the camera's accurate human detection and instant alert features.

Fast & Reliable Dual-Band Wi-Fi

Enjoy smooth, stable connectivity with dual-band Wi-Fi—no more buffering or lag.

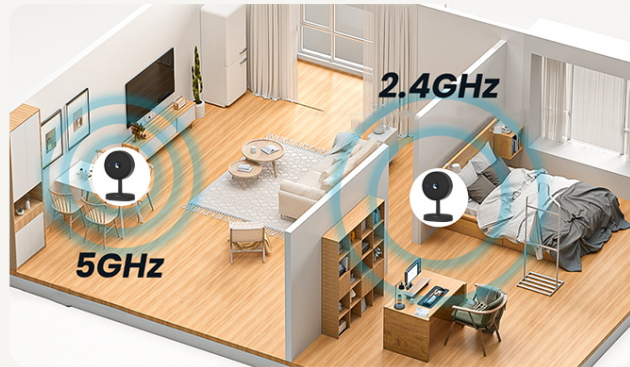


Image: A child playing with a cat, with an orange outline indicating the camera's Smart AI Detection accurately identifying subtle movements or human activity and sending instant alerts.

4. Night Vision

The camera provides enhanced night vision up to 30 feet, ensuring clear monitoring in low-light or total darkness.

- Night vision activates automatically in low light conditions.
- The camera uses infrared technology for clear black and white images at night.

Ultra-Clear 2K UHD Vision

Dual cameras deliver stunning 2K resolution, giving you sharp, detailed views of your home for complete peace of mind.

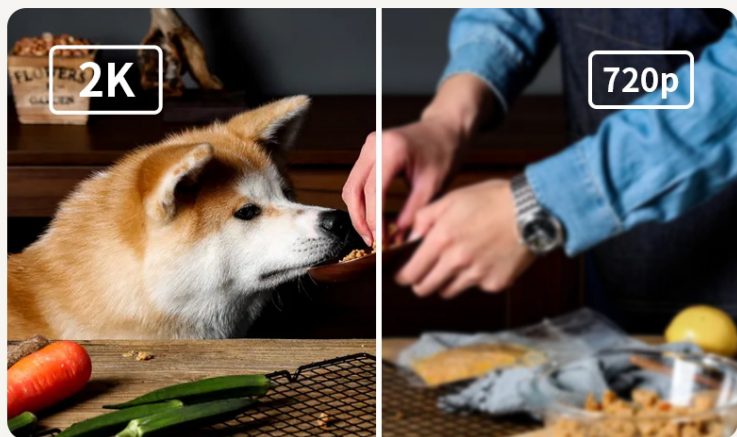


Image: A golden retriever dog resting, with an inset showing a zoomed-in view of its face, illustrating the camera's advanced night vision capability to keep your home in clear view 24/7, even in total darkness.

5. Digital Zoom

Utilize the 3X digital zoom feature to view finer details in the live feed or recorded footage.

- Pinch to zoom in or out on the live view or playback screen within the app.

3X Digital Zoom

Capture life's moments with family, pets, and joy



Image: Two comparative images showing a family with a dog. The top image is a wide shot (1X zoom), and the bottom image is a closer view (3X zoom), demonstrating the camera's 3X digital zoom capability to capture details.

Your Voice, Always There

With two-way audio, you're never truly away—talk to those who matter most, anytime, from anywhere.



Image: A baby playing with colorful stacking rings, with an inset showing a zoomed-in view of the baby's face, illustrating the 3x zoom clarity of the 2K camera for sharp, detailed views.

6. Storage Options

The camera supports both local and cloud storage for recorded footage.

- **Micro SD Card:** Insert a Micro SD card (up to 256GB, not included) into the camera's SD card slot for local storage and continuous 24/7 recording.
- **Cloud Storage:** Optional cloud storage services are available through the app for secure off-site storage of your recordings.

Multiple Storage Options



Cloud Storage



256GB (Micro Memory Card not included)



24/7/Record

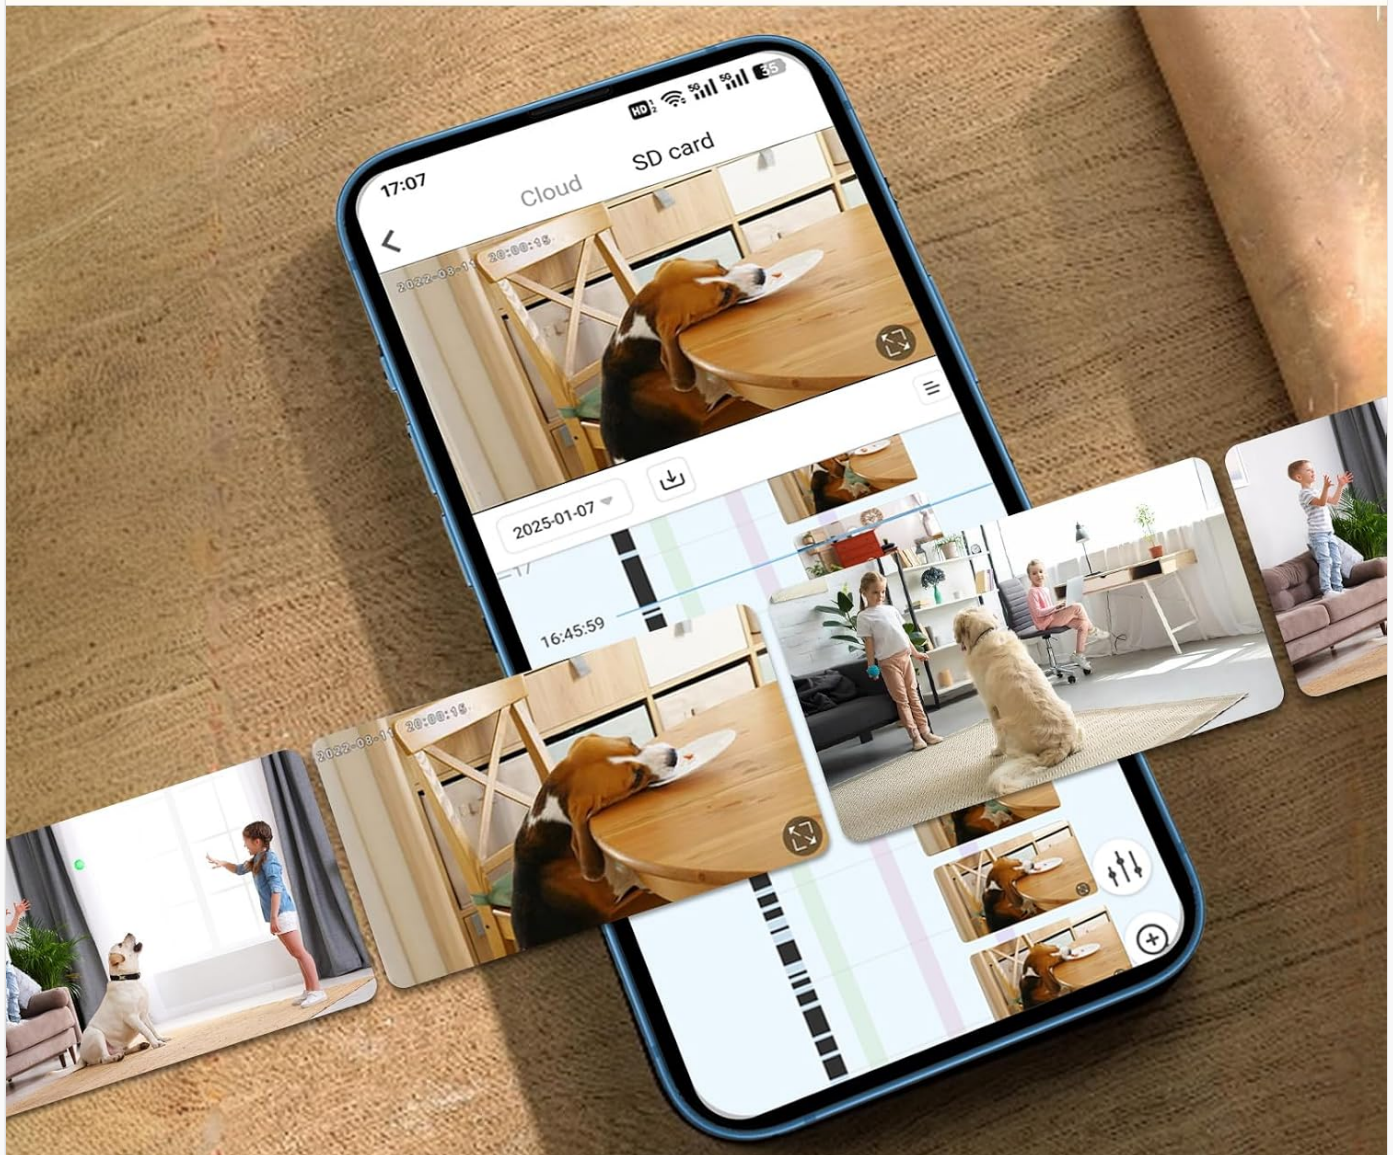


Image: A smartphone displaying a timeline of recorded events from the camera, with icons for Cloud Storage, SD Card Storage (up to 256GB), and 24/7 recording, illustrating the multiple storage options available.

Zoom In with 3x Clarity

Experience 3x zoom with 2K cameras for sharp, detailed views—even from a distance. Watch the whole scene and zoom in on important areas



Image: The Alaga security camera next to a smartphone displaying recorded footage and a Micro SD card, emphasizing flexible storage options

including both Micro SD card (not included) and cloud storage for continuous 24/7 recording.

7. Smart Home Integration

The Alaga camera is compatible with Amazon Alexa and Google Assistant for convenient voice control.

- Link your CareCam Pro account with your Alexa or Google Home app.
- Use voice commands such as "Alexa, show me the baby room" to view the live feed on compatible smart displays.

Smart Home Compatibility

Works with Alexa and Google Assistant



Image: A smart display showing a baby in a crib, with logos for Google Assistant and Alexa, and a voice command example: "Alexa, show me the baby room," demonstrating the camera's smart home compatibility.

8. Multi-User Sharing

Share access to your camera's live view and features with family members or trusted individuals.

- Within the CareCam Pro app, navigate to the sharing settings.
- Invite others to view your camera by entering their account details.

Flexible Storage Options

The security camera supports both microSD card and cloud storage. For continuous 24/7 recording, a separate microSD card is required to capture and save your daily moments.

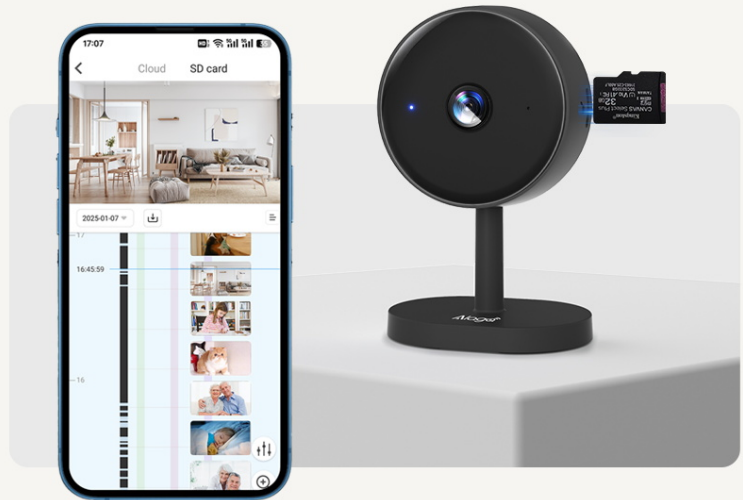


Image: A hand holding a smartphone displaying the "Share Device" interface within the app, surrounded by various family members, illustrating the ease of sharing live viewing and heartwarming moments with loved ones.

MAINTENANCE

- **Cleaning:** Use a soft, dry cloth to clean the camera lens and body. Avoid abrasive cleaners or solvents.
- **Placement:** Ensure the camera is placed in a dry indoor environment. It is not water-resistant.
- **Firmware Updates:** Regularly check the CareCam Pro app for available firmware updates to ensure optimal performance and security.

TROUBLESHOOTING

Common Issues and Solutions:

- **Camera will not connect to Wi-Fi:**
 - Ensure your Wi-Fi network is 2.4GHz or 5GHz. The camera supports both.
 - Check your Wi-Fi password for accuracy.
 - Move the camera closer to your Wi-Fi router to improve signal strength.
 - Restart your router and the camera.
- **Delayed Notifications:**
 - Check your internet connection speed and stability.
 - Ensure the CareCam Pro app has necessary permissions for notifications on your phone.
 - Adjust motion detection sensitivity in the app.
- **No image/poor image quality:**
 - Ensure the camera lens is clean and free from obstructions.
 - Check power connection.
 - Verify network connection for stable streaming.
- **Cloud service payment:**
 - Cloud service is optional. You can use a Micro SD card for local storage instead.



Image: A Q&A section addressing common questions: 'Does the camera support 5GHz Wi-Fi?' (Yes, it supports 2.4GHz and 5GHz Wi-Fi) and 'Is the camera wired or battery powered?' (The camera is wired. It needs to be plugged in to work).

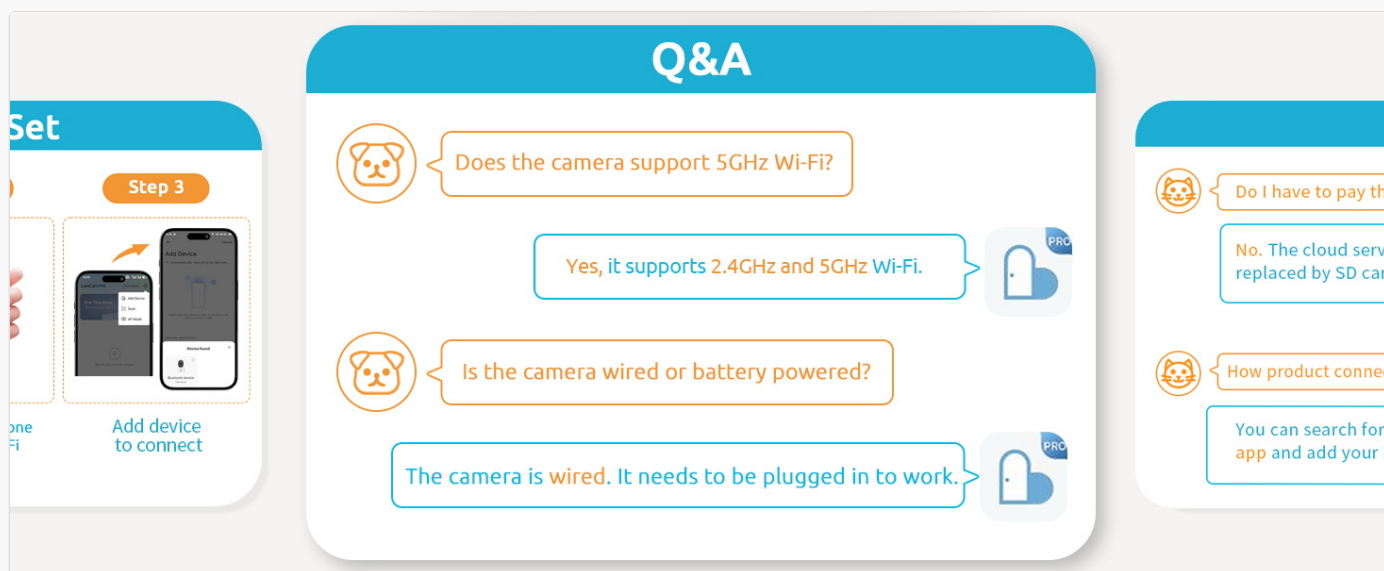


Image: A Q&A section addressing common questions: 'Do I have to pay the cloud service?' (No, it's optional and can be replaced by SD card) and 'How product connect with Alexa?' (Search for 'CareCam pro' in the Alexa app and add your home camera).

WARRANTY AND SUPPORT

For warranty information and technical support, please contact the manufacturer, Alaga. Refer to the packaging or the official Alaga website for contact details.

© 2025 Alaga. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question