

Bewinner Bewinnerudowcrv7i6

Bewinner 1080P Wireless WiFi Security Camera User Manual

Model: Bewinnerudowcrv7i6

1. INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your Bewinner 1080P Wireless WiFi Security Camera. Please read this manual thoroughly before using the product to ensure proper function and safety. This camera is designed for both indoor and outdoor surveillance, offering features such as 1080P video resolution, night vision, motion detection, and remote access via a mobile application.

2. SAFETY INFORMATION

- Ensure the camera is installed in a stable location to prevent accidental falls.
- Do not expose the camera to extreme temperatures, direct sunlight for prolonged periods, or excessive moisture.
- Use only the provided charging cable and power adapter to prevent damage to the device.
- Keep the camera away from strong magnetic fields.
- Do not attempt to disassemble or repair the camera yourself. Contact customer support for assistance.
- Dispose of the battery and electronic components according to local regulations.

3. PACKAGE CONTENTS

Verify that all items listed below are included in your package:

- 1 x Bewinner Wireless WiFi Camera
- 1 x Back Shell
- 1 x Bracket
- 1 x Charging Cable (Type-C USB)
- 1 x User Manual (this document)



Figure 3.1: Contents of the Bewinner 1080P Wireless WiFi Security Camera package.

4. PRODUCT OVERVIEW

The Bewinner 1080P Wireless WiFi Security Camera is a compact and versatile surveillance device. It features a 1080P HD lens, infrared night vision, and a built-in microphone for audio recording. The camera supports remote monitoring via a mobile application and includes motion detection capabilities.



Figure 4.1: Labeled components of the Bewinner Wireless WiFi Camera.

Key Features:

- **1080P HD Video:** Records clear, high-definition video.
- **Infrared Night Vision:** Four built-in non-light night vision lights provide clear visibility in dark conditions.
- **Motion Detection:** Automatically captures photos and sends notifications upon detecting movement or sound.
- **App Remote Control:** Real-time monitoring, video playback, and camera control via the MyLiveCam app.
- **Loop Recording:** Overwrites old data when the memory card is full (supports up to 128GB, not included).
- **Built-in Microphone:** Records clear audio along with video.
- **Battery Powered:** Integrated 500mAh lithium-ion battery for independent operation.

HD WIFI CAMERA



Photosensitive night vision

Cabinet and delicate



Figure 4.2: Overview of camera features.

5. SETUP

5.1 Charging the Camera

Before first use, fully charge the camera. Connect the provided Type-C USB charging cable to the camera's Type-C USB port and the other end to a standard USB power adapter (not included) or a computer USB port. The indicator light will show charging status.

Record While Charging

The device has a built-in battery
Can be used independently



Figure 5.1: Charging the camera.

5.2 Inserting a Memory Card

The camera supports a memory card (TF card) up to 128GB (not included). Locate the TF card slot on the camera (refer to Figure 4.1). Gently insert the memory card with the contacts facing down until it clicks into place. To remove, push the card in again until it springs out.

5.3 App Installation (MyLiveCam)

1. Download the 'MyLiveCam' app from your smartphone's app store (Google Play Store for Android or Apple App Store for iOS).
2. Install the app and create an account if you are a new user.

5.4 Connecting to Wi-Fi

1. Power on the camera. The indicator light will flash, indicating it's ready for connection.
2. Open the MyLiveCam app on your smartphone.
3. Follow the in-app instructions to add a new device. This typically involves scanning a QR code on the camera or manually selecting the camera from a list of nearby devices.

4. Select your 2.4GHz Wi-Fi network and enter the password. The camera does not support 5GHz Wi-Fi networks.
5. Once connected, the indicator light on the camera will turn solid, and the camera will appear online in the app.

5.5 Mounting the Camera

The camera comes with a bracket for flexible placement. Attach the camera to the bracket and secure it to a desired surface using appropriate mounting hardware (not included). Ensure the camera has a clear view of the area you wish to monitor.



Figure 5.2: Example mounting positions for the camera.

6. OPERATING INSTRUCTIONS

6.1 App Remote Control

Once the camera is connected to the MyLiveCam app, you can access its features remotely:

- **Real-time Monitoring:** View live video feed from the camera on your smartphone.

- **Video Playback:** Access recorded footage stored on the memory card directly from the app.
- **Camera Control:** Adjust settings, initiate manual recordings, or take snapshots.

6.2 Motion Detection

The camera is equipped with motion and sound detection. To enable and configure this feature:

1. Navigate to the camera settings within the MyLiveCam app.
2. Locate the 'Motion Detection' or 'Alarm Settings' option.
3. Enable motion detection and adjust sensitivity levels as needed.
4. Configure notification preferences to receive alerts on your smartphone when motion or sound is detected.

6.3 Night Vision

The camera automatically switches to night vision mode in low-light conditions. The four infrared lights provide clear black and white video footage without emitting visible light.



Figure 6.1: Comparison of day and night vision effects.

6.4 Loop Recording

When a memory card is inserted, the camera will continuously record. Once the memory card is full, the oldest recordings will be automatically overwritten by new footage. Ensure you regularly back up important recordings if needed.

6.5 Multi-User Viewing

The MyLiveCam app allows for sharing camera access with multiple users. This feature enables family members or trusted individuals to view the camera feed simultaneously.

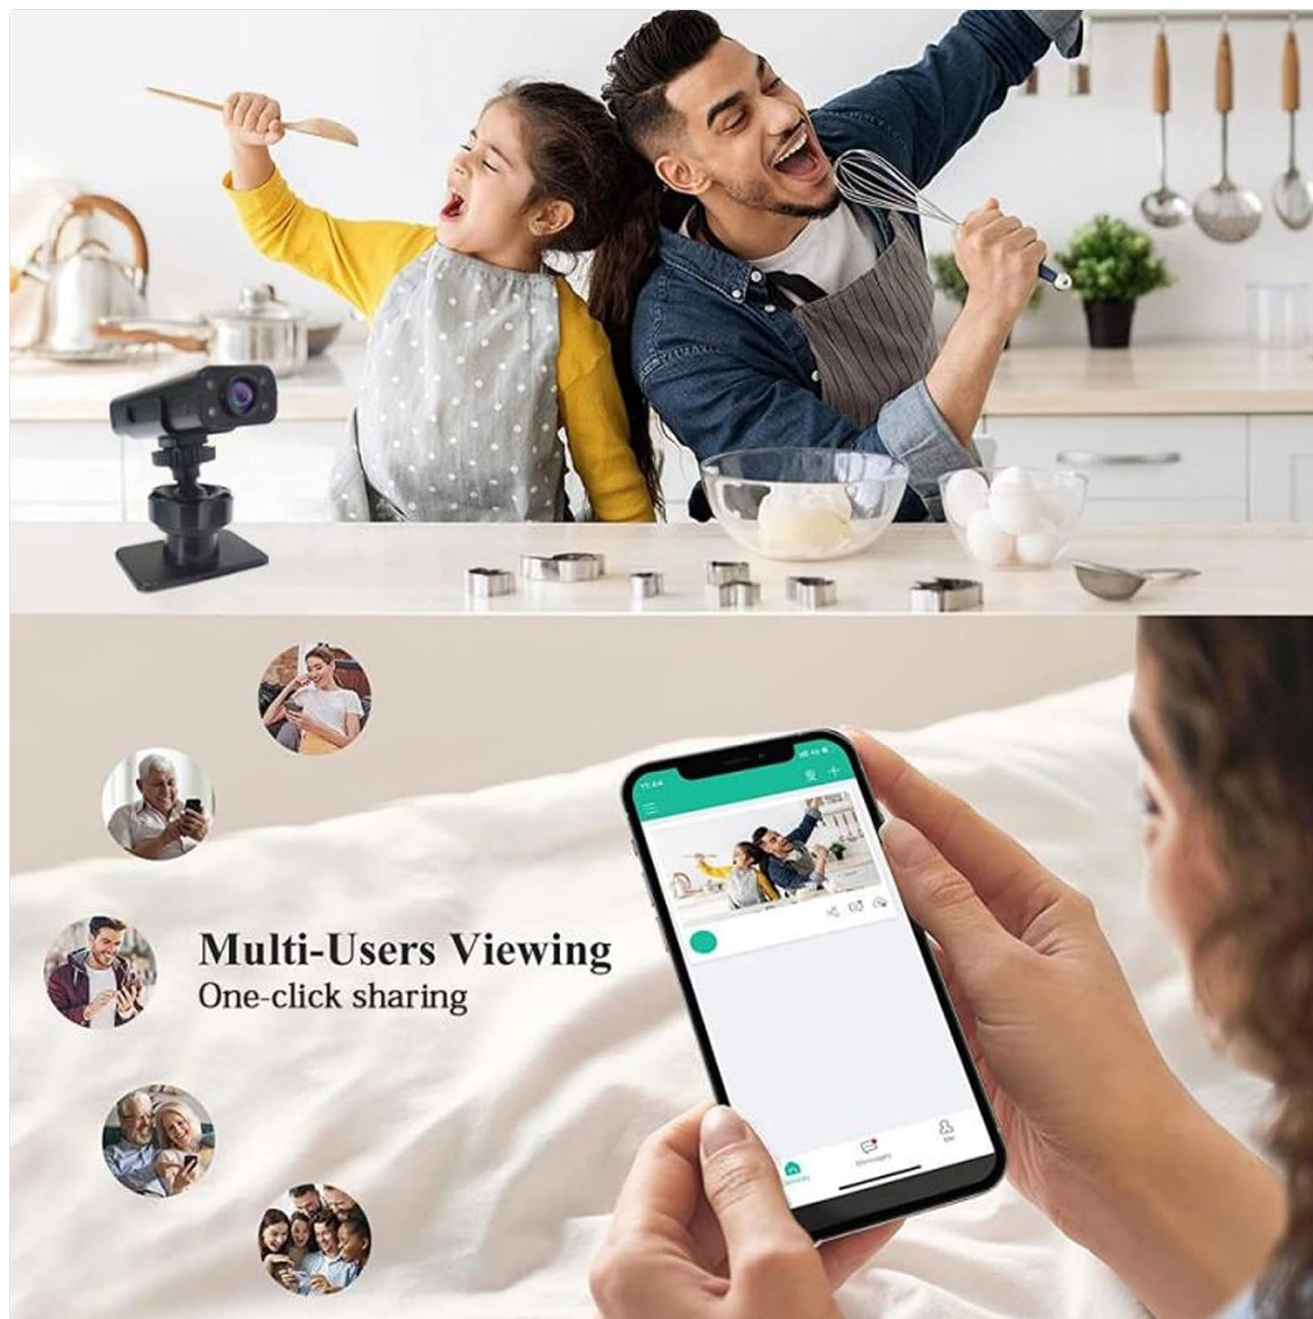


Figure 6.2: Multi-user viewing capability.

7. MAINTENANCE

- **Cleaning:** Use a soft, dry cloth to clean the camera lens and body. Avoid using harsh chemicals or abrasive materials.
- **Battery Care:** To prolong battery life, avoid fully discharging the battery frequently. Charge the camera regularly, especially if it will be stored for an extended period.

- **Memory Card Management:** Periodically format the memory card through the app settings to maintain optimal performance and prevent data corruption.
- **Firmware Updates:** Check the MyLiveCam app regularly for any available firmware updates for your camera. Updates can improve performance and add new features.

8. TROUBLESHOOTING

Problem	Possible Cause	Solution
Camera not connecting to Wi-Fi	Incorrect Wi-Fi password; 5GHz Wi-Fi network; Camera too far from router; Weak signal.	Ensure correct password. Connect to a 2.4GHz network. Move camera closer to the router. Restart router and camera.
No video feed in app	Camera offline; Internet connection issue; App malfunction.	Check camera power and Wi-Fi connection. Verify internet connectivity on your phone. Restart the app.
Motion detection not working	Feature disabled; Sensitivity too low; Incorrect detection zone.	Enable motion detection in app settings. Increase sensitivity. Adjust detection zones.
Recordings not saving	No memory card; Memory card full or corrupted; Incorrect recording settings.	Insert a compatible memory card. Format the memory card. Check recording settings in the app.
Poor night vision quality	Lens obstruction; Infrared lights blocked.	Clean the camera lens. Ensure no objects are blocking the infrared lights.

9. SPECIFICATIONS

Feature	Specification
Video Resolution	1920 x 1080 (1080P)
Storage Support	Memory Card (TF card) up to 128GB (Not Included)
Night Vision	HD Infrared Night Vision (4 non-light IR LEDs)
APP	For MyLiveCam
Battery	Lithium Ion Battery 500mAh (Built-in)
Connectivity Technology	Wi-Fi (2.4GHz only)
Wide View Angle	90 degrees
Power Source	AC/DC (via USB charging)
Item Weight	2.96 ounces
Package Dimensions	4.33 x 3.15 x 1.57 inches
Model Name	Bewinnerudowcrv7i6

10. WARRANTY AND SUPPORT

For warranty information and technical support, please refer to the Bewinner official website or contact your retailer. Keep your purchase receipt as proof of purchase for any warranty claims. If you encounter any issues not covered in this manual, please reach out to customer service for further assistance.

© 2025 Bewinner. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question