

[manuals.plus](#) /

› [MEETION](#) /

› [MEETION C2000 Wireless Keyboard and Mouse Combo User Manual](#)

## MEETION C2000

# MEETION C2000 Wireless Keyboard and Mouse Combo User Manual

Model: C2000

## 1. INTRODUCTION

This user manual provides detailed instructions for the setup, operation, and maintenance of your MEETION C2000 Wireless Keyboard and Mouse Combo. This versatile combo offers both 2.4GHz wireless and Bluetooth connectivity, designed for seamless use across multiple devices such as PCs, laptops, tablets, and smartphones. Please read this manual thoroughly before using the product to ensure optimal performance and longevity.

## 2. PACKAGE CONTENTS

- MEETION C2000 Wireless Keyboard
- MEETION C2000 Wireless Mouse
- USB Receiver (stored in the mouse or keyboard)
- USB-C Charging Cable
- User Manual (this document)



Image: The MEETION C2000 keyboard and mouse combo, showing the keyboard, mouse, USB receiver, and USB-C charging cable.

### 3. PRODUCT OVERVIEW

#### 3.1 Keyboard Components



Image: Detailed diagram of the keyboard highlighting function keys (F1-F12) and indicator lights for 2.4G, Bluetooth, Caps Lock, FN Lock, and battery status.

The keyboard features a full-size layout with a numeric keypad. Key components include:

- **Function Keys (F1-F12):** Provide multimedia control and system shortcuts when used with the FN key.
- **Indicator Lights:**
  - Green Light: 2.4G mode indicator (solid for connected, flashing for pairing/reconnection).
  - Blue Light: Bluetooth mode indicator (solid for connected, flashing for pairing/reconnection).
  - Red Light: Battery status (flashing for low power, solid for charging, off for fully charged).

- Caps Lock/FN Lock Indicators.
- **Mode Switching Keys:** Dedicated keys to switch between 2.4G and Bluetooth modes.
- **Adjustable Kickstands:** Located on the underside for 4° and 7° tilt angles.

### 3.2 Mouse Components



Image: Detailed diagram of the mouse showing the Type-C charging port, DPI speed switch button, power switch, USB receiver storage, mode switching button, and connection indicators.

The mouse features a comfortable ergonomic design with silent click buttons. Key components include:

- **Left/Right Click Buttons:** Silent operation.
- **Scroll Wheel:** For navigation.
- **DPI Speed Switch Button:** Adjusts cursor sensitivity (1200/1600/2400/3200/3800 DPI).
- **Mode Switching Button:** Switches between 2.4G and Bluetooth modes.
- **Power Switch:** ON/OFF switch on the underside.
- **USB Receiver Storage:** Compartment on the underside for the 2.4GHz USB receiver.
- **Type-C Charging Port:** For recharging the internal battery.
- **Connection Indicators:** Lights for 2.4G, Bluetooth, charging, and low battery.

## 4. SETUP

### 4.1 Charging the Devices

Both the keyboard and mouse are equipped with built-in rechargeable lithium batteries. Use the provided USB-C charging cable to charge them.

1. Connect the USB-C end of the charging cable to the charging port on the keyboard (top right) or mouse (front).
2. Connect the USB-A end of the charging cable to a USB power source (e.g., computer USB port, USB wall adapter).
3. The red indicator light on the device will illuminate while charging. It will turn off when fully charged.

A full charge takes approximately 2 hours. The keyboard provides up to 300 hours of use, and the mouse provides up to 150 hours of use on a single charge.



Image: The keyboard and mouse being charged via USB-C cables, showing the charging indicator lights.

## 4.2 2.4GHz Wireless Connection

This mode uses the included USB receiver for a stable wireless connection.

1. Locate the USB receiver, typically stored in the mouse's battery compartment or a dedicated slot.
2. Insert the USB receiver into an available USB-A port on your computer or device.
3. **For Keyboard:** Turn the keyboard's power switch (located on the back) to the "ON" position. Press the 2.4G mode switching key (usually indicated by a wireless icon) on the keyboard. The corresponding green indicator light will illuminate.
4. **For Mouse:** Toggle the power switch on the underside of the mouse to the "ON" position. Press the "Mode" button on the mouse until the green 2.4G indicator light illuminates.
5. The devices should automatically connect. If not, the indicator lights will flash, indicating pairing mode.

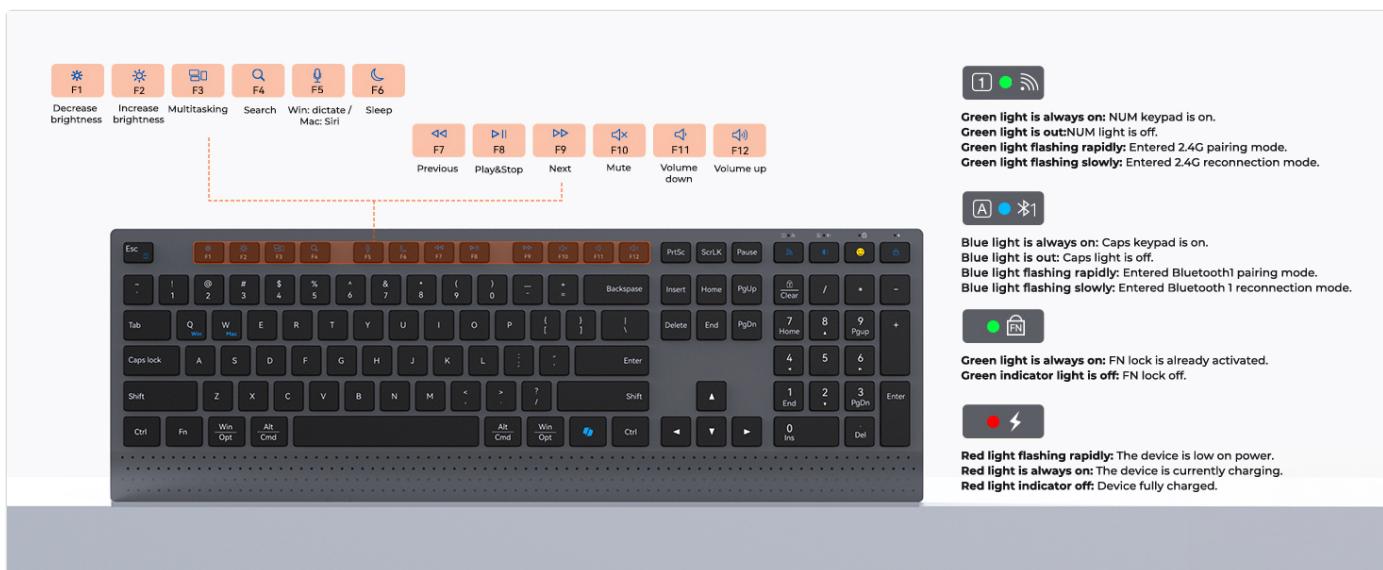


Image: Visual guide for connecting the keyboard and mouse via 2.4G wireless mode, showing insertion of USB receiver, power switch, and mode selection.

## 4.3 Bluetooth Connection

This mode allows connection to devices without a USB port, such as tablets and smartphones.

1. **For Keyboard:** Turn the keyboard's power switch to the "ON" position. Press the Bluetooth mode switching key (usually indicated by a Bluetooth icon) on the keyboard. The blue indicator light will flash, indicating it's in pairing mode.

mode.

2. **For Mouse:** Toggle the power switch on the underside of the mouse to the "ON" position. Press the "Mode" button on the mouse until the blue Bluetooth indicator light flashes, indicating pairing mode.
3. On your device (PC, laptop, tablet, smartphone), go to Bluetooth settings and search for new devices.
4. Select "Meetion\_KB\_BT1" (for keyboard) and "Meetion\_Mouse\_BT1" (for mouse) from the list of available devices.
5. Follow any on-screen prompts to complete the pairing process. The blue indicator light will become solid once connected.



Image: Visual guide for connecting the keyboard and mouse via Bluetooth mode, showing power switch, mode selection, and device pairing screen.

The C2000 combo supports multi-device connectivity, allowing you to switch between up to three devices (one 2.4G and two Bluetooth) effortlessly using the mode switching keys.

## 5. OPERATING INSTRUCTIONS

### 5.1 Keyboard Functions

The keyboard offers various functions accessible via the FN key combinations:

Key Combination	Function
FN + F1	Decrease Brightness
FN + F2	Increase Brightness
FN + F3	Multitasking
FN + F4	Search
FN + F5	Win Dictate / Mac Siri
FN + F6	Sleep
FN + F7	Previous Track
FN + F8	Play/Pause
FN + F9	Next Track

Key Combination	Function
FN + F10	Mute
FN + F11	Volume Down
FN + F12	Volume Up
FN + Q/W/E	Switch between connected devices (PC, laptop, tablet, phone).
Dedicated Copilot Key	Instant access to AI tools (Windows only).
Dedicated Smiley Face Key	Easily insert emojis (supports Windows, macOS, iPadOS, Android Samsung; not iPhone iOS).

The keyboard also features dual kickstands on the underside, allowing you to adjust the typing angle to 4° or 7° for improved ergonomics and comfort during long typing sessions.



Image: The keyboard demonstrating its two adjustable tilt angles, 4 degrees and 7 degrees, provided by the dual kickstands.

## 5.2 Mouse Functions

The mouse offers precise control and quiet operation:

- **DPI Adjustment:** Press the DPI button (located near the scroll wheel) to cycle through five sensitivity settings: 1200, 1600, 2400, 3200, and 3800 DPI. Choose the setting that best suits your needs for smooth and precise cursor control.
- **Mode Switching:** Use the "Mode" button on the mouse to switch between 2.4G wireless and Bluetooth connections.
- **Silent Clicks:** The mouse buttons are designed for quiet operation, reducing noise in quiet environments.



Image: The mouse highlighting its quiet operation and the range of adjustable DPI settings (1200, 1600, 2400, 3200, 3800).

## 6. MAINTENANCE

To ensure the longevity and optimal performance of your MEETION C2000 combo, follow these maintenance guidelines:

- **Cleaning:**

- Use a soft, dry, lint-free cloth to wipe down the surfaces of the keyboard and mouse.
- For stubborn dirt, slightly dampen the cloth with water or a mild, non-abrasive cleaner. Avoid excessive moisture.
- Do not spray cleaning solutions directly onto the devices.
- Use compressed air to remove dust and debris from between the keyboard keys.

- **Storage:**

- When not in use for extended periods, turn off both the keyboard and mouse to conserve battery life.
- Store the devices in a cool, dry place, away from direct sunlight and extreme temperatures.
- Keep the USB receiver stored in its designated slot in the mouse to prevent loss.

- **Battery Care:**

- Avoid fully discharging the batteries frequently. Recharge them when the low battery indicator appears.
- Do not expose the devices to extreme heat or cold, as this can affect battery life.

## 7. TROUBLESHOOTING

If you encounter issues with your MEETION C2000 combo, please refer to the following common solutions:

Problem	Possible Solution
---------	-------------------

Problem	Possible Solution
Keyboard/Mouse not responding	<ul style="list-style-type: none"> <li>◦ Ensure both devices are turned ON.</li> <li>◦ Check battery levels and recharge if necessary.</li> <li>◦ Verify the correct connection mode (2.4G or Bluetooth) is selected on both devices and your computer.</li> <li>◦ For 2.4G: Ensure the USB receiver is securely plugged into a working USB port. Try a different USB port.</li> <li>◦ For Bluetooth: Ensure Bluetooth is enabled on your device and the devices are paired correctly. Try unpairing and re-pairing.</li> <li>◦ Restart your computer/device.</li> </ul>
Lag or intermittent connection	<ul style="list-style-type: none"> <li>◦ Move the devices closer to the USB receiver or Bluetooth-enabled device.</li> <li>◦ Avoid using the devices near strong interference sources (e.g., Wi-Fi routers, other wireless devices).</li> <li>◦ Ensure the devices are fully charged.</li> </ul>
Mouse cursor erratic or not moving smoothly	<ul style="list-style-type: none"> <li>◦ Clean the optical sensor on the underside of the mouse.</li> <li>◦ Try using the mouse on a different surface.</li> <li>◦ Adjust the DPI setting using the DPI button on the mouse.</li> </ul>
Keyboard keys not working	<ul style="list-style-type: none"> <li>◦ Ensure Caps Lock or FN Lock is not inadvertently activated if specific keys are affected.</li> <li>◦ Clean around the affected keys to remove any debris.</li> <li>◦ Recharge the keyboard.</li> </ul>
Cannot switch between devices	<ul style="list-style-type: none"> <li>◦ Ensure you are pressing the correct mode switching keys on the keyboard and mouse.</li> <li>◦ Verify that all intended devices are properly paired in their respective modes (2.4G or Bluetooth).</li> </ul>

## 8. SPECIFICATIONS

Feature	Detail
Model Number	C2000
Connectivity	2.4GHz Wireless, Bluetooth 5.2
Keyboard Layout	Full Size with Numeric Keypad
Keyboard Battery Life	Up to 300 hours (on 2-hour charge)
Mouse DPI Settings	1200 / 1600 / 2400 / 3200 / 3800 DPI

Feature	Detail
Mouse Battery Life	Up to 150 hours (on 2-hour charge)
Charging Port	USB-C
Compatible Devices	Windows, macOS, Laptop, PC, Desktop, iPad, Phone (Android)
Keyboard Dimensions	Approximately 17.2 x 5.8 x 1 inches
Mouse Dimensions	Approximately 4.4 x 2.4 x 1.49 inches
Item Weight	2.18 pounds (combo)



Image: Detailed dimensions of the keyboard (17.2in x 5.8in x 1in) and mouse (4.4in x 2.4in x 1.49in).

## 9. WARRANTY AND SUPPORT

MEETION products are designed for reliability and performance. For warranty information and technical support, please refer to the following:

- **Warranty:** This product comes with a standard manufacturer's warranty. Please retain your proof of purchase for

warranty claims. Specific warranty terms and duration may vary by region.

- **Technical Support:** For assistance with setup, troubleshooting, or any other product-related inquiries, please visit the official MEETION website or contact their customer support.
- **Online Resources:** Additional FAQs and support resources may be available on the MEETION brand store page on Amazon or the manufacturer's website.

*Note: As per the provided data, specific warranty details or direct contact information for support are not available. Please refer to the manufacturer's official channels for the most up-to-date support information.*