

[Manuals.plus](#) /

› [Ajazz](#) /

› Ajazz AF84 Wireless Membrane Silent Typewriter Keyboard User Manual

Ajazz AF84

Ajazz AF84 Wireless Membrane Silent Typewriter Keyboard User Manual

Model: AF84 | Brand: Ajazz

1. INTRODUCTION

This manual provides detailed instructions for the setup, operation, maintenance, and troubleshooting of your Ajazz AF84 Wireless Membrane Silent Typewriter Keyboard. Please read this manual thoroughly before using the product to ensure proper function and longevity.

Package Contents:

- Ajazz AF84 Wireless Keyboard
- 2.4G USB Receiver
- User Manual (this document)
- (Batteries not included - requires 2x AAA batteries)



Figure 1.1: Ajazz AF84 Wireless Keyboard (Black variant)

2. SAFETY INFORMATION

To ensure safe operation and prevent damage, please observe the following precautions:

- Do not expose the keyboard to water or excessive moisture.
- Avoid dropping or subjecting the keyboard to strong impacts.
- Do not attempt to disassemble or modify the keyboard. This will void the warranty.
- Keep the keyboard away from extreme temperatures and direct sunlight.
- Use only specified AAA batteries. Ensure correct polarity during installation.

3. SETUP

3.1 Battery Installation

The Ajazz AF84 keyboard requires two (2) AAA batteries (not included). The battery compartment is located on the underside of the keyboard.

1. Locate the battery compartment cover on the bottom of the keyboard.
2. Slide the cover open.
3. Insert two AAA batteries, ensuring the correct positive (+) and negative (-) polarity as indicated inside the compartment.
4. Close the battery compartment cover securely.



Figure 3.1: Receiver Storage and Battery Compartment

3.2 2.4G Wireless Connection

For a stable and fast wireless connection, use the included 2.4G USB receiver.

1. Locate the 2.4G USB receiver, typically stored in a dedicated slot on the underside of the keyboard.
2. Plug the USB receiver into an available USB port on your computer or device.
3. Turn on the keyboard using the ON/OFF switch located on the underside.
4. The keyboard should automatically connect to your device. The 2.4G indicator light will turn off to indicate successful connection.

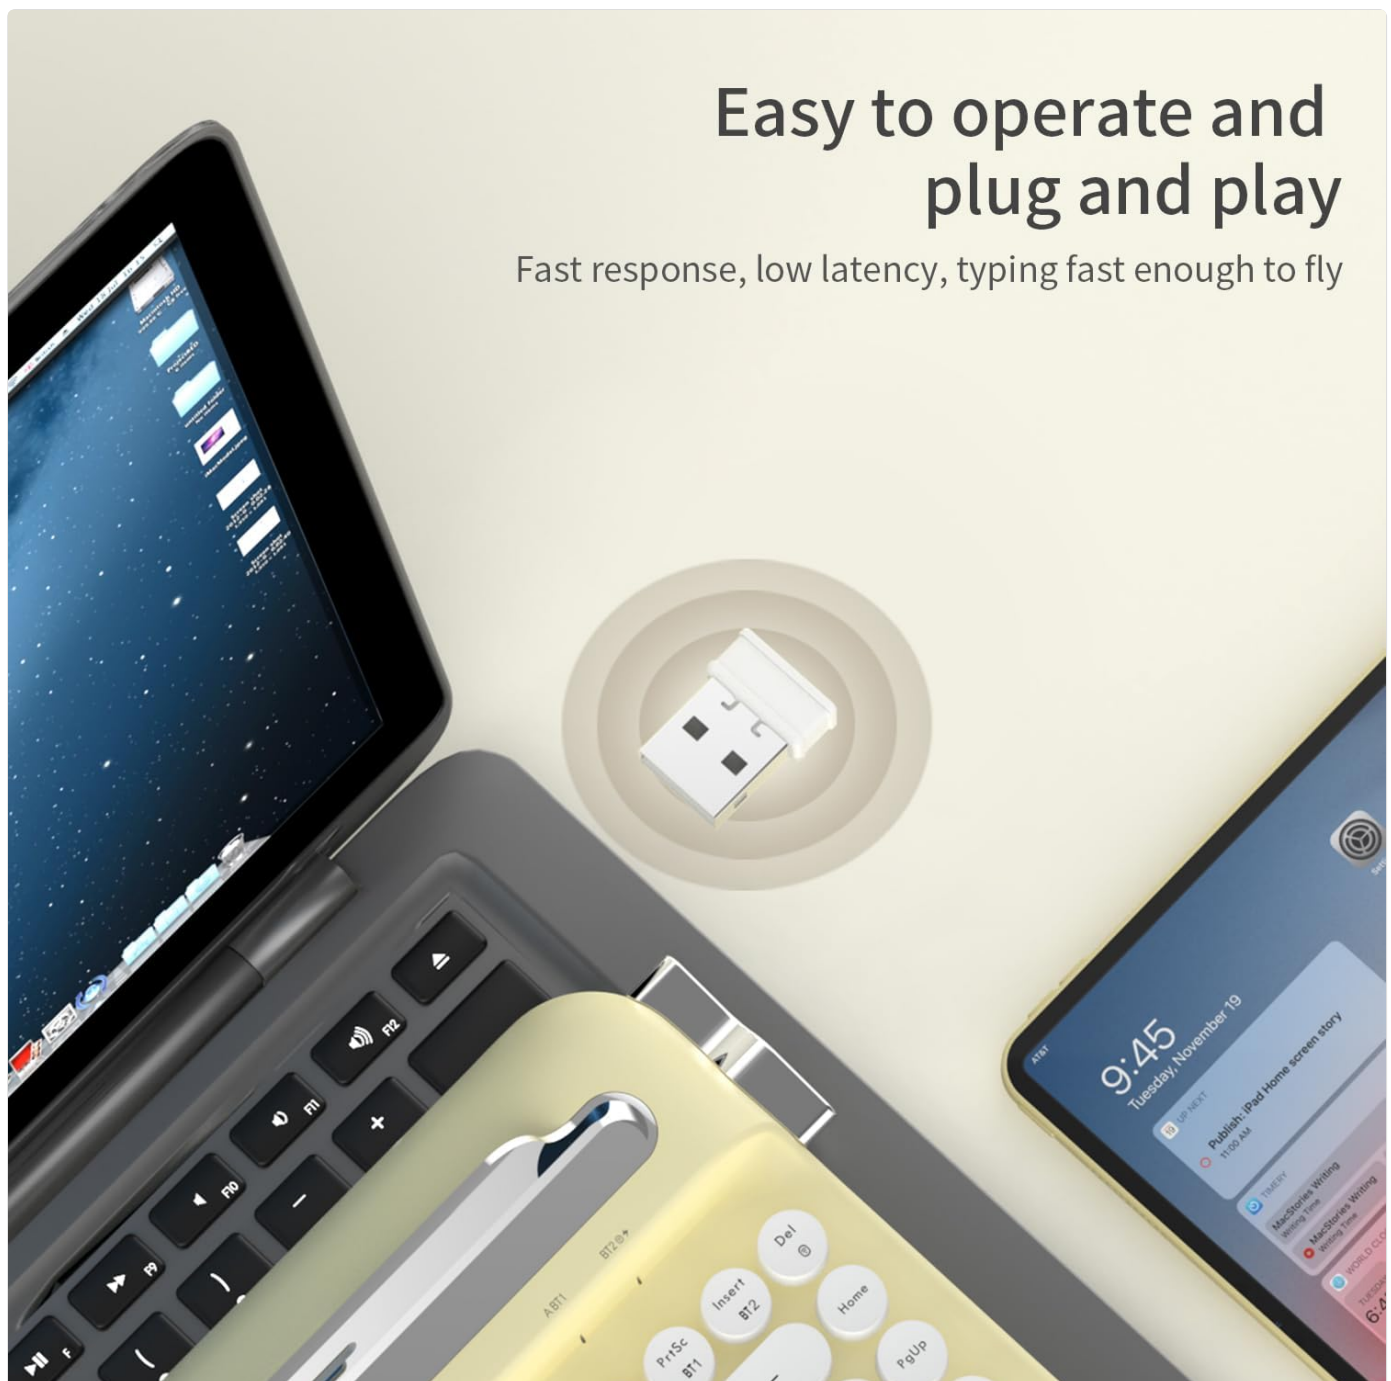


Figure 3.2: Connecting the 2.4G USB Receiver

3.3 Bluetooth Connection (BT1 / BT2)

The keyboard supports dual Bluetooth connections, allowing you to switch between two paired devices.

1. Turn on the keyboard using the ON/OFF switch.
2. Press and hold the **Fn + PrtSc (BT1)** or **Fn + Insert (BT2)** key combination for 3-5 seconds until the corresponding BT indicator light (BT1 or BT2) starts flashing rapidly. This indicates pairing mode.
3. On your device (tablet, phone, PC), enable Bluetooth and search for available devices.
4. Select "AF84" from the list of found devices.
5. Once paired, the BT indicator light will remain solid green.
6. To switch between paired Bluetooth devices, simply press **Fn + PrtSc (BT1)** or **Fn + Insert (BT2)**. The corresponding light will illuminate.

Your browser does not support the video tag.

Video 3.1: Demonstrating Bluetooth pairing and typing with the Ajazz AF84 keyboard.

3.4 Device Compatibility

The Ajazz AF84 keyboard is compatible with a wide range of operating systems and devices:

- **Windows:** Suitable for Windows 8.0 and above.
- **macOS:** Compatible with macOS 10.10 and above.
- **Android:** Supports Android 2.4G mode.
- **iOS:** Compatible with iPhone and iPad devices.
- **Other:** Vista, Win7/8/10.

To optimize keyboard functions for different operating systems, use the following key combinations:

- **Fn + Q:** Switch to iOS mode
- **Fn + W:** Switch to Windows mode
- **Fn + E:** Switch to Android mode



Support multiple devices

Mac/Win system "fully compatible"

Laptop/Desktop/All in One/Smart TV/Phone/Tablet

Figure 3.3: Multi-Device Compatibility

4. OPERATING INSTRUCTIONS

4.1 Key Functions and Multimedia Controls

The keyboard features 84 keys, including function keys that can be accessed using the **Fn** key.

Table 4.1: Function Key Combinations

Key Combination	Function
Fn + F1	Media Player
Fn + F2	Volume Down
Fn + F3	Volume Up
Fn + F4	Mute
Fn + F5	Previous Track
Fn + F6	Next Track
Fn + F7	Play/Pause
Fn + F8	Stop
Fn + F9	Email
Fn + F10	Web Browser
Fn + F11	My Computer
Fn + F12	Calculator
Fn + PrtSc (BT1)	Switch to Bluetooth Channel 1 / Enter Pairing Mode for BT1
Fn + Insert (BT2)	Switch to Bluetooth Channel 2 / Enter Pairing Mode for BT2
Fn + Del	Switch to 2.4G Wireless Mode
Caps Lock Key	Toggle Caps Lock (Red indicator light)

4.2 Indicator Lights Explanation

The keyboard features several indicator lights to provide status information:

- **"A" (Caps Lock Indicator Light):** Press the Caps Lock key to turn the red light on for uppercase. Press again to turn off the red light and restore lowercase.
- **"@" (2.4G Indicator Light):** When in 2.4G mode (Fn+Del), this indicator light will be off.
- **"BT1/BT2" (Bluetooth Channel Indicator Light):** When switching to BT1 or BT2 mode, the corresponding indicator light will remain green after successful connection. Flashing green indicates pairing mode.
- **"<" (Low Power Indicator Light):** A flashing red light indicates low battery power. Replace batteries promptly.

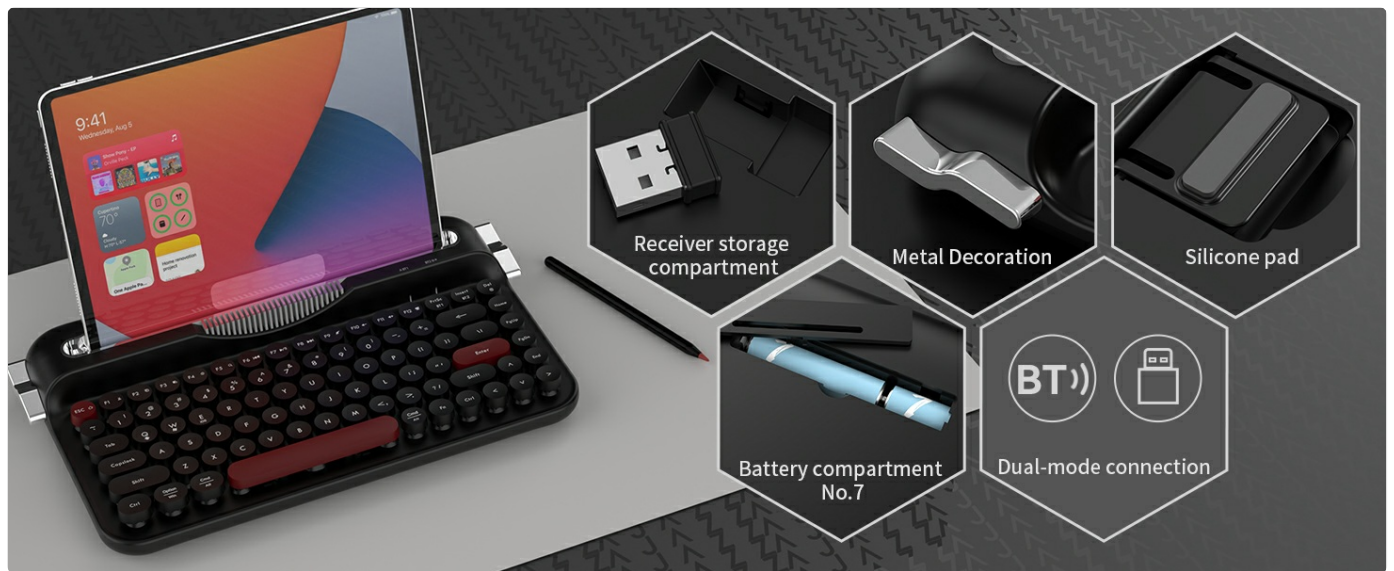


Figure 4.1: Indicator Lights Overview

4.3 Using the Integrated Tablet & Phone Stand

The keyboard features an extended front ledge with a sturdy card slot stand designed to securely hold your iPad, Kindle, or smartphone (up to 12.9 inches) while typing.

- Simply place your tablet or smartphone into the integrated slot.
- Ensure the device is seated securely before typing.

Comes with card slot bracket position

Integrated card slot supports mobile phones or tablets



Figure 4.2: Integrated Card Slot Bracket Position

4.4 Adjustable Feet

The keyboard includes adjustable feet on the underside, allowing you to set the typing angle for maximum comfort during extended use.

- Flip the keyboard over to access the adjustable feet.
- Extend the feet to raise the back of the keyboard, creating a gentle incline.
- Fold the feet back in for a flatter typing experience.

Ergonomic comfort is abundant

Comes with a tripod, the keyboard height can be adjusted
according to personal habits, making typing easy
Long term use is not tiring



Figure 4.3: Ergonomic Comfort with Adjustable Feet

5. MAINTENANCE

5.1 Cleaning the Keyboard

Regular cleaning helps maintain the keyboard's appearance and functionality.

- Turn off the keyboard before cleaning.
- Use a soft, lint-free cloth slightly dampened with water or a mild, non-abrasive cleaning solution to wipe the surface.
- For dust and debris between keycaps, use compressed air or a small brush.
- Do not spray cleaners directly onto the keyboard.

5.2 Battery Replacement

When the low power indicator light flashes red, it's time to replace the batteries.

- Follow the battery installation steps outlined in Section 3.1.
- Dispose of used batteries responsibly according to local regulations.

6. TROUBLESHOOTING

If you encounter issues with your Ajazz AF84 keyboard, refer to the following common problems and solutions:

Table 6.1: Troubleshooting Guide

Problem	Possible Cause / Solution
Keyboard not responding / No connection.	◦ Ensure the keyboard is turned ON. ◦ Check battery level; replace if low. ◦ For 2.4G: Ensure the USB receiver is securely plugged in. Try a different USB port. ◦ For Bluetooth: Ensure Bluetooth is enabled on your device. Re-enter pairing mode (Fn + BT1/BT2) and re-pair. Ensure you are within the effective range. ◦ Ensure the correct operating system mode is selected (Fn + Q/W/E).
Keys are sticky or unresponsive.	◦ Clean the keyboard as described in Section 5.1. ◦ Ensure no foreign objects are lodged under the keycaps.
Bluetooth connection drops frequently.	◦ Move the keyboard closer to your device. ◦ Check for interference from other wireless devices. ◦ Re-pair the keyboard with your device. ◦ Ensure device Bluetooth drivers are up to date.
Incorrect characters typed.	◦ Verify that the keyboard is set to the correct operating system mode (Fn + Q/W/E). ◦ Check your device's language and keyboard layout settings.

7. SPECIFICATIONS

Table 7.1: Product Specifications

Feature	Detail
Product Brand	AJAZZ
Product Model	AF84
Transmission Mode	Dual-mode (Bluetooth 5.0 / 2.4G)
Product Size	348.9 x 203.3 x 32.1 mm (13.74 x 8.00 x 1.26 inches)
Product Weight	~680g (1.5 lbs)
Shell Material	ABS Injection Molding

Feature	Detail
Battery	2 x AAA batteries
Lighting Effect	No light
Working Voltage	3.0V
Key Layout	84 keys
Compatible Devices	Laptop, PC, Smartphone
Keyboard Description	Retro typewriter
Special Feature	Round Keycaps, Integrated Tablet/Phone Stand, Adjustable Feet

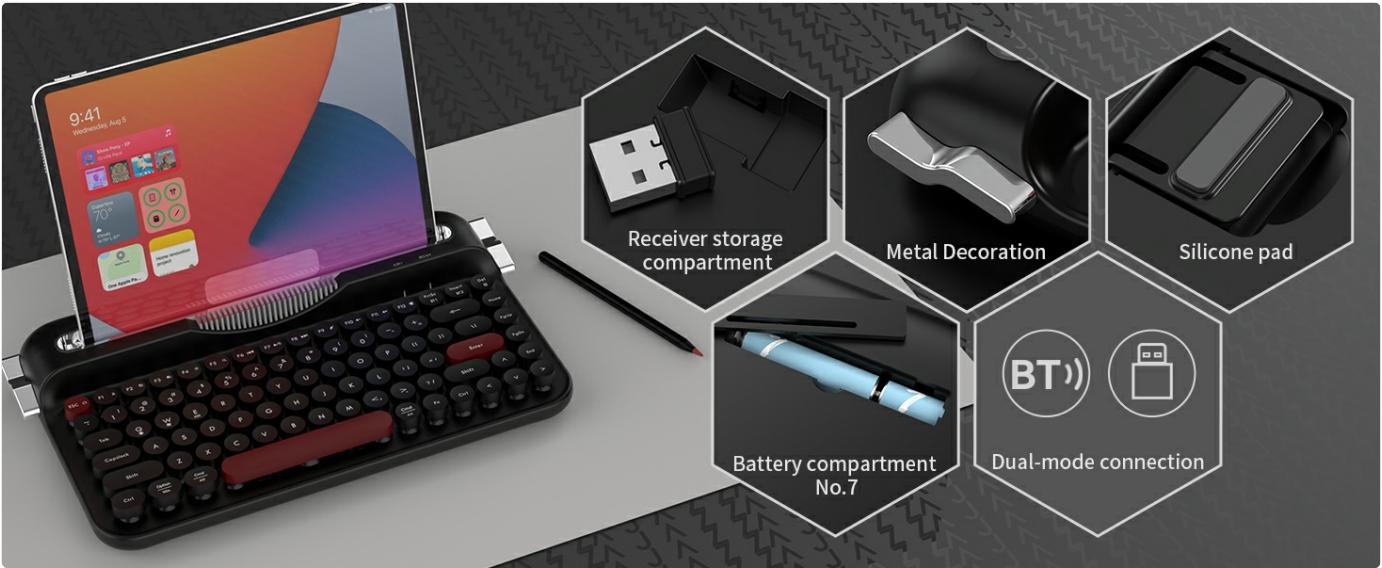


Figure 7.1: Product Parameters

8. WARRANTY AND SUPPORT

Ajazz products are manufactured to high quality standards. For information regarding warranty coverage, technical support, or service inquiries, please refer to the warranty card included with your product or visit the official Ajazz website. You may also contact the seller directly through the platform where you purchased the product for assistance.

Ajazz Official Website: www.ajazz.com

© 2025 Ajazz. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0F6NSBZ9V>

More documents and user manuals: <https://manuals.plus/>