产品设计制作稿


622本厂英文说明书-无线

105克铜版纸,黑色,风琴折页

日期

2024-4-11

Size: $80 \times 100 \text{ mm}$

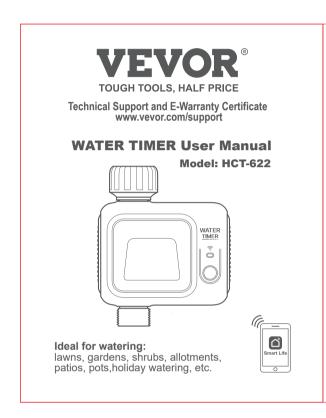



DEVICE INTRODUCTION

HOSE TAP CONNECTION 3/4 " Internal Thread with built-in filter RESET / MANUAL BUTTON WATER OUTLET 3/4 " External Thread

Working Pressure	0.05 Мра-0.8 Мра			
Power Supply	2 ×1.5 V 'AA' Alkaline Batteries			
Applicable Locations	Outdoor			
Distance Between Wireless Water Timer and Smart Phone About 15 m (no obstacles between them)				

Working Temperature 3°C - 45°C

*The Company reserves the right to change the definition and upgrade the device without prior notice.

DOWNLOAD THE APP

- 1 Search in APP Store / Google Play or scan the QR code of Smart Life.
- Register an account in the APP.



CONNECT THE WIRELESS WATER TIMER

- 1. Take the water timer near your smart phone, and enter the homepage of Smart Life APP.
- 2. Place the batteries into the timer and the light indicator blinks quickly to start connection
- * If it does not get paired in 1 min, the light indicator will turn off. Please hold the reset button for 3 sec to reset.
- or scan the QR code to add in the APP.



OPERATING INSTRUCTIONS IN APP

18℃

2. Click "Wireless Water Timer" and get into the main page of

Schedule

- 1. Click "Weather Delay" and choose the period you want. 1. After finishing the connection, the timer paired will be Schedule plans and Spray plan will not be performed within displayed on the page.
 - 2. If you want to start "Smart Weather" function, first please add this timer to the Company's gateway.

MANUAL WATERING:

WEATHER DELAY:

- 1. Click "Manual Watering" to set the runtime and save it.
- 2. Click " (-)" button to start the Manual Watering. When the set runtime is over, the timer will stop watering itself.
- 3. If you want to cancel Manual watering in midway, please Click " (-) " button again.

The connection delay will be about 0.5 to 3 seconds, please do not repeatedly click the button.

together with the Company's Gateway.

- 1. Click "Schedule" and enter the "Add" page.
- 2. Click "Add" to enter the content setting page. 3. Set start time, runtime and loop / single time, then click "Save".
- 4 Back to the listing the on-off button on the right side of the plan will be green, indicating it has been set successfully.
- 5. Up to 5 plans can be added by setting like above steps.

This figue shows:

Schedule mode will water 30 min, start time is 06:00, every Sunday, Tuesday,

This figue shows: Schedule mode will water 10 min, start time is 20:15,

S M T W T F S

Remote control and more functions can be achieved if used

TIPS:

EC REP E-CrossStu GmbH Mainzer Landstr.69,60329 Frankfurt am Main.

"Save Half", "Half Price" or any other similar expressions used by us only represents an estimate of savings you might benefit from buying certain tools with us compared to the major top brands and does not necessarily mean to cover all categories of tools offered by us. You are kindly reminded to verify carefully when you are placing an order with us

SPRAY:

1. Cick "Spray" and enter the content setting page.

2. Set start time, end time, spray duration, interval duration and loop / single time, then click "Save" below and on-off button on the upper right corner into green. E Snrav

+	Spray		This figue shows:		-	Spray	-
Start time	08:00	4	Spray mode will water		Start time	18:30	4
End time	10:00	4	5 min, duration time is 20 min, start from 08:00 and		End time	21:00	4
Spray duration	05 _m 00 _s	4	stop at 10:00, single time.	Ш	Spray duration	10 ₪ 00 ₅	4
Interval duration	20 _m 00 _s	4			Interval duration	30 m 00 s	4
Loop	Single time				Loop	M, W, F	
S (M)	T W T	s) (s)	This figue shows:		s (M)	T W T	s s
	Save		Spray mode will water			Save	
			10 min, duration time is 30				
			min, start from 18:30 and	K			
			stop at 21:00, every				
		1	Monday, Wednesday and	and			
			Friday.				

¶♥ TIPS:

Please upgrade the version according to the APP prompts and regularly clean up the cache to ensure that the device

INSTALLATION

 Attach the timer to an outdoor hose faucet and the water outlet to the water pipe firmly.

2. An O-ring / adapter / guick connector / PTFE tape can be used as a protection against water leakage

3. Turn on the faucet and keep it on

! NOTES:

• When the timer is used, the water inlet must be equipped with a filter to prevent impurities from blocking the valve, which may resulting in valve switch failure or water leakage. Please clean or replace the filter regularly.

- The timer itself does not generate pressure and needs tap
- water pressure or water source with pressure to work well. • The working temperature of the timer is 3°C-45°C. When it reaches the freezing temperature or the timer is not in use for a long time, please take it off, pick out the batteries, empty the water in the valve tube, and store it in an indoor dry place.













TROUBLESHOOTING

1. The smart phone Bluetooth is enabled but the APP fails to connect to the Wireless Water Timer.

- -The distance between the smart phone and the timer maybe exceed the Bluetooth's effective range, please adjust the
- 2. Long press the reset button for 3 seconds but the indicator does not blink. -Reinstall / replace the batteries and retry.
- 3. The hose tap connection / water outlet of the device is
- -The thread is not properly screwed. Please try again. -The thread does not match. Please use an adapter / quick connector / PTFE tape if needed.
- 4. Little water flows out when watering. -There might dirt particles blocked in the valve tube. Please
- clean the filter in time. -It is likely the local municipal water pressure is low.
- 5. No water comes out of the timer within the set time. -The faucet is off. Please turn it on.
- -The batteries are exhausted. Please replace with new ones. When "\(\hat{\pi}\)" displays on the page, that means the power is about to be exhausted and the timer cannot work properly. -Weather Delay / Smart Weather is on. Please turn it off.

DECLARATION ON HAZARDOUS SUBSTANCES IN ELECTRONIC PRODUCTS

PARTS	Hazardous Substances						
ARIS	Pb	Hg	Cd	Cr(VI)	PBB	PBDE	
Plastic	0	0	0	0	0	0	
СВА	0	0	0	0	0	0	
Accessories	0	0	0	0	0	0	

This form is compiled in accordance with the requirements of SJ / T11364. Indicates that the concentration of the hazardous substance contained in all the homogeneous materials of this part is below the limit requirement of the GB / T26572 standard.

Indicates that the concentration of the hazardous substance contained in all the homogeneous materials of this part is above the requirement of the GB / T26572 standard.



YH CONSULTING LIMITED.
C/O YH Consulting Limited Office 147, Centurion House London Road, Staines-upon-Thames, Surrey, TW184AX

Manufacturer: Ningbo Hanci Electrical Co., LTD. No.127 -129, Dexing Road, Ninghai County, Ningbo City, China. 315600

if you are actually saving half in comparison with the top major brands.







HCT-622-不带天线二维码

产品设计制作稿

622本厂英文说明书-无线


105克铜版纸,黑色,风琴折页

日期


 $Size:80\times100$ mm

2024-4-11

转曲

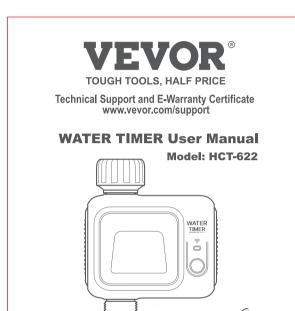





		RESET / MANUAL BUTT
<u> </u>		WATER OUTLET 3/4 " External Thread
Working Temperature	3°C -4	5°C
Working Pressure	0.05 M _I	ра-0.8 Мра

2 ×1.5 V 'AA' Alkaline Batteries Applicable Locations Outdoor Distance Between Wireless Water Timer and Smart Phone About 15 m (no obstacles between them)

*The Company reserves the right to change the definition and upgrade the

DOWNLOAD THE APP

- Search in APP Store / Google Play or scan the QR code of Smart Life. Smart Life Q
- Register an account in the APP



CONNECT THE WIRELESS WATER TIMER

- homepage of Smart Life APP.
- 2. Place the batteries into the timer and the light indicator blinks quickly to start connection
- * If it does not get paired in 1 min, the light indicator will turn off. Please hold the reset button for 3 sec to reset
- 3. Add the timer as promoted by the APP or scan the QR code to add in the APP.

TROUBLESHOOTING



OPERATING INSTRUCTIONS IN APP

18℃

Record Schedule

2 Click "Wireless Water Timer" and get into the main page of

the device.

- 1. Click "Weather Delay" and choose the period you want. 1. After finishing the connection, the timer paired will be Schedule plans and Spray plan will not be performed within displayed on the page.
 - 2. If you want to start "Smart Weather" function, first please add this timer to the Company's gateway.

MANUAL WATERING:

WEATHER DELAY:

- 1. Click "Manual Watering" to set the runtime and save it.
- 2. Click " (-) " button to start the Manual Watering. When the set runtime is over, the timer will stop watering itself.
- 3. If you want to cancel Manual watering in midway, please Click " () " button again.

! NOTES:


The connection delay will be about 0.5 to 3 seconds, please do not repeatedly click the button.

¶♥ TIPS:

Remote control and more functions can be achieved if used together with the Company's Gateway.

SCHEDULE:

- 1. Click "Schedule" and enter the "Add" page.
- 2. Click "Add" to enter the content setting page. 3. Set start time, runtime and loop / single time, then click "Save".
- 4. Back to the listing, the on-off button on the right side of the
- plan will be green, indicating it has been set successfully.
- 5. Up to 5 plans can be added by setting like above steps.

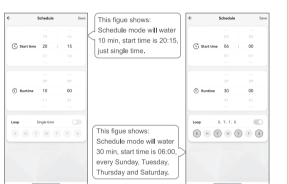


SPRAY:

1. Cick "Spray" and enter the content setting page.

Ideal for watering: lawns, gardens, shrubs, allotments,

patios, pots, holiday watering, etc.

2. Set start time, end time, spray duration, interval duration and loop / single time, then click "Save" below and on-off button on the upper right corner into green.

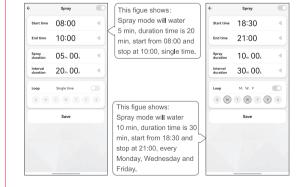

¶♥ TIPS:

Please upgrade the version according to the APP prompts and regularly clean up the cache to ensure that the device can work well.

INSTALLATION

- 1. Attach the timer to an outdoor hose faucet and the water outlet to the water pipe firmly.
- 2. An O-ring / adapter / quick connector / PTFE tape can be used as a protection against water leakage.
- 3. Turn on the faucet and keep it on.

NOTES:

- When the timer is used, the water inlet must be equipped with a filter to prevent impurities from blocking the valve, which may resulting in valve switch failure or water leakage. Please clean or replace the filter regularly.
- The timer itself does not generate pressure and needs tap
- water pressure or water source with pressure to work well. • The working temperature of the timer is 3°C-45°C. When it reaches the freezing temperature or the timer is not in use for a long time, please take it off, pick out the batteries, empty the







water in the valve tube, and store it in an indoor dry place.







- -It is likely the local municipal water pressure is low.
- -The faucet is off. Please turn it on.
- When "\hat{\Pi}" displays on the page, that means the power is about to be exhausted and the timer cannot work properly

IN ELECTRONIC PRODUCTS

- 1. The smart phone Bluetooth is enabled but the APP fails to connect to the Wireless Water Timer.
- -The distance between the smart phone and the timer maybe exceed the Bluetooth's effective range, please adjust the
- 2. Long press the reset button for 3 seconds but the indicator does not blink.
- -Reinstall / replace the batteries and retry.
- 3. The hose tap connection / water outlet of the device is
- -The thread is not properly screwed. Please try again. -The thread does not match. Please use an adapter / quick connector / PTFE tape if needed.
- 4. Little water flows out when watering. -There might dirt particles blocked in the valve tube. Please
- clean the filter in time.
- 5. No water comes out of the timer within the set time.
- The batteries are exhausted. Please replace with new ones.
- --Weather Delay / Smart Weather is on. Please turn it off.

DECLARATION ON HAZARDOUS SUBSTANCES

MOTO	Hazardous Substances						
PARTS	Pb	Hg	Cd	Cr(VI)	PBB	PBDE	
Plastic	0	0	0	0	0	0	
РСВА	0	0	0	0	0	0	
Accessories	0	0	0	0	0	0	

This form is compiled in accordance with the requirements of SJ / T11364. Indicates that the concentration of the hazardous substance contained in all the homogeneous materials of this part is below the limit requirement of the GB / T26572 standard

Indicates that the concentration of the hazardous substance contained in all the homogeneous materials of this part is above the requirement



E-CrossStu GmbH Mainzer Landstr.69,60329 Frankfurt am Main.

YH CONSULTING LIMITED.
C/O YH Consulting Limited Office 147,Centurion House
London Road,Staines-upon-Thames,Surrey,TW184AX Manufacturer: Ningbo Hanci Electrical Co., LTD. No.127 -129, Dexing Road, Ninghai County, Ningbo City, China. 315600 "Save Half". "Half Price" or any other similar expressions used by us only represents an estimate of savings you might benefit from buying certain tools with us compared to the major top brands and does not necessarily mean to cover all categories of tools offered by us. You are kindly reminded to verify carefully when you are placing an order with us if you are actually saving half in comparison with the top major brands.

VEVOR Technical Support and E-Warranty Certificate



HCT-622-不带天线二维码