

JYX H1T

JYX H1T Sound Bar User Manual

50W Surround Sound System with Wireless Microphones

1. INTRODUCTION

This manual provides detailed instructions for the setup, operation, and maintenance of your JYX H1T Sound Bar. Please read this manual thoroughly before using the product to ensure proper functionality and to maximize your listening experience. Keep this manual for future reference.



Image 1.1: The JYX H1T Sound Bar, featuring a wood-grain finish, a digital display, and two wireless microphones. A remote control is also visible, positioned in front of a television screen.

2. PACKAGE CONTENTS

Verify that all items listed below are included in your package. If any items are missing or damaged, please contact customer support.

- 1 × JYX Soundbar
- 1 × User Manual
- 2 × Wireless Microphones
- 2 × Anti-slip Rings for Microphones
- 1 × Remote Control
- 1 × Power Cord
- 1 × Coaxial Cable
- 1 × 3.5mm Audio (AUX) Cable

Package Included

- 1 JYX Soundbar
- 2 User Manual
- 3 Microphone
- 4 Anti-slip Ring
- 5 Remote Control
- 6 Power Cord
- 7 Coaxial Cable
- 8 3.5mm Audio Cable



Image 2.1: Contents of the JYX H1T Sound Bar package, including the soundbar, remote control, two wireless microphones, anti-slip rings, power cord, coaxial cable, and AUX cable.

3. PRODUCT OVERVIEW

3.1 Front Panel and Top Controls

The front panel features a digital display showing current mode, time, and other indicators. The top panel includes essential control buttons.

Super Easy to Use

Description of buttons and interfaces

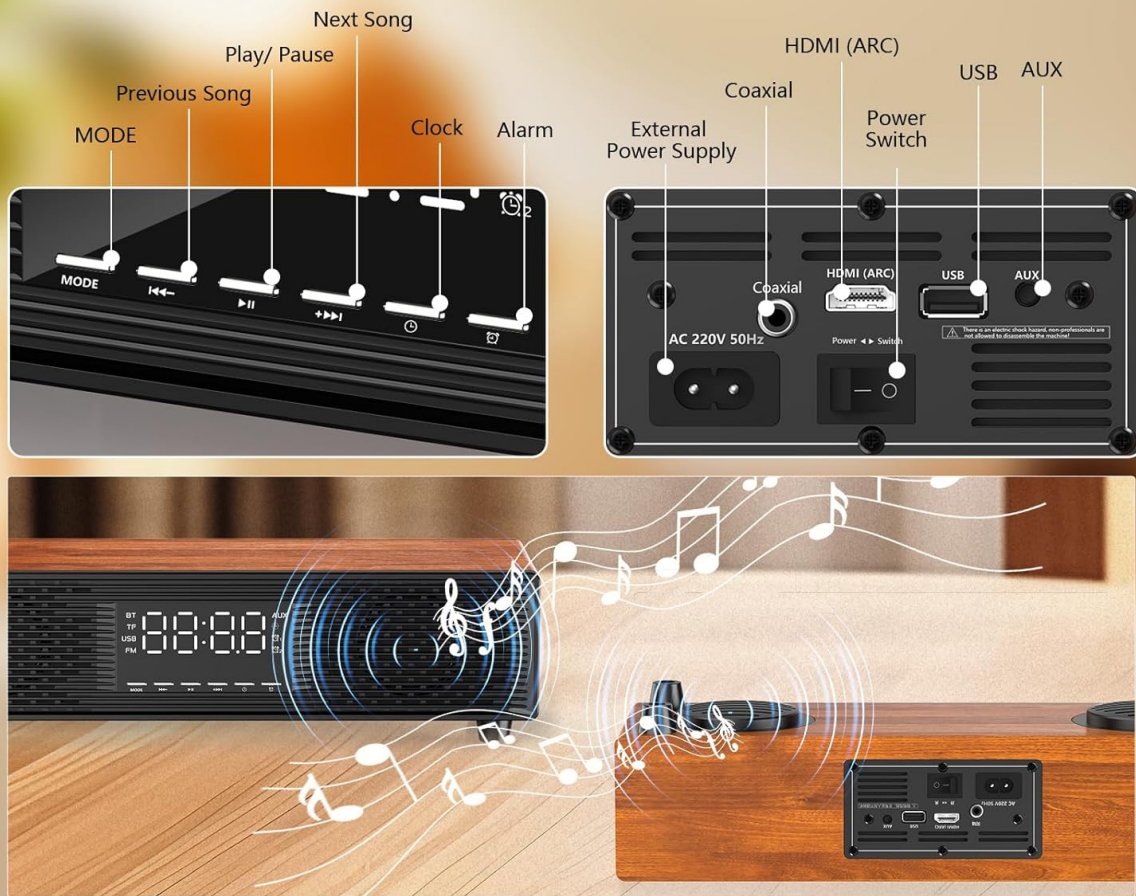


Image 3.1: Diagram illustrating the top panel controls (Mode, Previous Song, Play/Pause, Next Song, Clock, Alarm) and the rear connection ports (HDMI ARC, Coaxial, USB, AUX, External Power Supply, Power Switch).

- **MODE:** Switches between input sources (Bluetooth, USB, AUX, HDMI ARC, Coaxial, FM).
- **Previous Song (<<):** Skips to the previous track (in Bluetooth/USB mode).
- **Play/Pause (▶ ||):** Plays or pauses audio (in Bluetooth/USB mode).
- **Next Song (>>):** Skips to the next track (in Bluetooth/USB mode).
- **Clock:** Sets the time.
- **Alarm:** Sets an alarm.

3.2 Rear Connection Ports

- **HDMI (ARC):** Connects to a TV's HDMI ARC port for audio input.
- **Coaxial:** Connects to a device's coaxial audio output.
- **USB:** For USB drive playback.
- **AUX:** 3.5mm audio input for external devices.
- **AC 220V 50Hz:** Power input.
- **Power Switch:** Turns the soundbar on/off.

4. SETUP

4.1 Placement

Place the soundbar on a stable, flat surface directly in front of your TV or on a desktop. Ensure there is adequate space around the unit for proper ventilation.



Image 4.1: The soundbar's dimensions are 40cm (15.7in) length, 9cm (3.54in) depth, and 14.2cm (5.59in) height. It supports Bluetooth, USB, AUX, HDMI (ARC), and Coaxial connections, compatible with phones, tablets, TVs, PCs, and laptops.

4.2 Power Connection

1. Connect the included power cord to the AC 220V 50Hz port on the back of the soundbar.
2. Plug the other end of the power cord into a wall outlet.
3. Flip the Power Switch on the rear panel to the "ON" position. The soundbar will power on.

4.3 Audio Connection (Choose one method)

Select the appropriate connection method based on your TV or audio source.

- **HDMI ARC:**

- a. Connect an HDMI cable (not included) from the HDMI (ARC) port on the soundbar to the HDMI ARC port on your TV.
- b. Ensure your TV's audio output is set to HDMI ARC or external speakers.
- **Coaxial:**
 - a. Connect the included coaxial cable from the Coaxial port on the soundbar to the Coaxial audio output port on your TV or device.
 - b. Ensure your TV's audio output is set to Coaxial.
- **AUX (3.5mm Audio):**
 - a. Connect the included 3.5mm audio cable from the AUX port on the soundbar to the 3.5mm audio output (headphone jack) on your TV, PC, or other audio device.
- **Bluetooth:**
 - a. Power on the soundbar and switch to Bluetooth mode using the MODE button on the soundbar or remote. The display will show "BT".
 - b. On your mobile device, enable Bluetooth and search for "JYX H1T".
 - c. Select "JYX H1T" to pair. Once connected, the soundbar will indicate successful pairing.
- **USB:**
 - a. Insert a USB flash drive containing MP3 audio files into the USB port on the rear of the soundbar.
 - b. Switch to USB mode using the MODE button on the soundbar or remote. The soundbar will automatically begin playing audio from the USB drive.

5. OPERATING INSTRUCTIONS

5.1 Basic Operation

- **Power On/Off:** Use the power switch on the rear or the power button on the remote control.
- **Volume Control:** Use the Volume Up (+) and Volume Down (-) buttons on the soundbar or remote.
- **Input Mode Selection:** Press the MODE button on the soundbar or remote to cycle through input sources (BT, USB, AUX, HDMI ARC, COAX, FM).
- **Treble/Bass Adjustment:** Use the dedicated Treble and Bass buttons on the remote control to fine-tune audio output.

5.2 Wireless Microphones

The JYX H1T Sound Bar includes two wireless microphones for karaoke functionality.

1. **Powering On:** Insert batteries (not included) into each microphone. Press and hold the power button on each microphone to turn them on.
2. **Automatic Pairing:** The microphones will automatically pair with the soundbar when both are powered on.
3. **Microphone Volume:** Use the volume controls on the microphones themselves to adjust their individual volume levels.
4. **Anti-slip Rings:** Place the included anti-slip rings on the microphones to prevent them from rolling and provide extra grip.

5.3 Remote Control Functions

The full-function remote control allows for convenient operation from a distance.

- **Power:** Turns the soundbar on or off.
- **Mute:** Mutes or unmutes the sound.
- **Input Source Buttons:** Direct access to BT, USB, AUX, HDMI, COAX, FM modes.
- **Volume +/-:** Adjusts master volume.
- **Treble +/-:** Adjusts treble levels.
- **Bass +/-:** Adjusts bass levels.
- **EQ Modes:** Cycles through preset equalizer settings (e.g., Music, Movie, News).
- **Play/Pause, Previous/Next:** Controls media playback in Bluetooth and USB modes.
- **Clock/Alarm:** For setting time and alarms.

6. MAINTENANCE

- **Cleaning:** Use a soft, dry cloth to clean the surface of the soundbar. Do not use liquid cleaners or abrasive materials.
- **Ventilation:** Ensure the ventilation openings are not blocked to prevent overheating.
- **Storage:** If storing the soundbar for an extended period, disconnect it from power and store it in a cool, dry place.
- **Microphone Care:** Remove batteries from microphones if they will not be used for a long time to prevent leakage.

7. TROUBLESHOOTING

Problem	Possible Cause	Solution
No power	Power cord not connected; Power switch off; Wall outlet not working.	Ensure power cord is securely connected. Turn on the power switch. Test the outlet with another device.
No sound	Incorrect input mode; Volume too low; Cables not connected properly; TV audio output settings incorrect.	Select the correct input mode. Increase volume. Check all audio cable connections. Adjust TV audio output to external speakers or the correct digital output.
Bluetooth pairing failed	Soundbar not in BT mode; Device too far; Interference.	Ensure soundbar is in BT mode. Move device closer. Avoid sources of interference.
Microphones not working	Microphones not powered on; Batteries low/dead; Not paired.	Ensure microphones are powered on. Replace batteries. Microphones should pair automatically; if not, power cycle both the soundbar and microphones.
Remote control not working	Batteries low/dead; Obstruction; Remote not pointed at sensor.	Replace remote batteries. Remove any obstructions. Point the remote directly at the soundbar's sensor.

8. SPECIFICATIONS

- **Model:** H1T
- **Output Power:** 50W
- **Speakers:** Dual 2.75" tweeters
- **Connectivity:** HDMI ARC, Coaxial, AUX (3.5mm), USB, Bluetooth
- **Bluetooth Version:** (Not specified, assuming standard)
- **Power Input:** AC 220V 50Hz
- **Product Dimensions:** 40 cm (L) x 9 cm (W) x 14.2 cm (H) / 15.7 x 3.5 x 5.6 inches
- **Weight:** Approximately 3.28 kg
- **Included Components:** Soundbar, Remote Control, User Manual, 2 Wireless Microphones, 2 Anti-slip Rings, Power Cord, Coaxial Cable, 3.5mm Audio Cable.



Image 8.1: An illustrative diagram highlighting the soundbar's internal speaker components, emphasizing 50W power output, HiFi quality sound, and advanced DSP chips for enhanced audio performance.

9. WARRANTY AND SUPPORT


JYX products are designed and manufactured to the highest quality standards. This product comes with a standard manufacturer's warranty. For specific warranty terms and conditions, please refer to the warranty card included in your package or visit the official JYX website.


For technical support, troubleshooting assistance, or any inquiries regarding your JYX H1T Sound Bar, please contact JYX customer service through the retailer where you purchased the product or via the contact information provided on the official JYX website.

Online Resources: For additional support and product information, visit the [JYX Store on Amazon](#).

© 2025 JYX. All rights reserved.

Related Documents - H1T

	<p>JYX S1 Sound Card Audio Karaoke Machine User Manual - Setup and Operation Guide</p> <p>Official user manual for the JYX S1 Sound Card Audio Karaoke Machine. Find detailed instructions on setup, connections, product features, specifications, and troubleshooting for your JYX S1 karaoke system.</p>
	<p>JYX TX05 Bluetooth Karaoke Machine User Manual</p> <p>Comprehensive user manual for the JYX TX05 Bluetooth Karaoke Machine, detailing setup, operation, features, and troubleshooting for this portable audio system with two microphones.</p>
	<p>JYX-T8/T9 User Manual: Operation Guide for Karaoke Machine</p> <p>Comprehensive user manual for the JYX-T8/T9 karaoke machine, covering speaker and remote control operations, modes, recording, and troubleshooting.</p>
	<p>JYX T17-T Karaoke Machine User Manual - Portable Speaker with Wireless Microphones</p> <p>Comprehensive user manual for the JYX T17-T portable karaoke machine. Learn about its features, setup, operation, and troubleshooting for wireless microphones, LED lights, Bluetooth, USB, TF, and AUX connectivity.</p>
	<p>JYX-TX02 Karaoke Machine User Manual: Operation, Specifications, and FAQs</p> <p>Comprehensive user manual for the JYX-TX02 Karaoke Machine. Learn about device controls, remote functions, specifications, packing list, and troubleshooting FAQs for this Bluetooth PA system.</p>

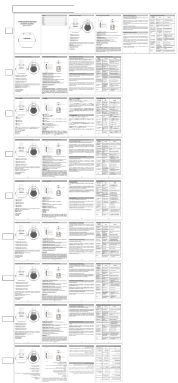

[JYX D25 Kids Karaoke Machine User Manual - Bluetooth and Wireless Microphones](#)

Detailed user manual for the JYX D25 Kids Karaoke Machine. This guide covers setup, Bluetooth connectivity, wireless microphone usage, and troubleshooting tips for optimal performance.