

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [Gmilai](#) /

› [Gmilai Electric Conical Burr Coffee Grinder & Digital Coffee Scales Bundle User Manual](#)

Gmilai G9010B

Gmilai Electric Conical Burr Coffee Grinder & Digital Coffee Scales Bundle User Manual

Model: G9010B

INTRODUCTION

Thank you for choosing the Gmilai Electric Conical Burr Coffee Grinder and Digital Coffee Scales Bundle. This manual provides essential instructions for the safe and efficient operation, maintenance, and care of your new coffee preparation system. Please read this manual thoroughly before first use and keep it for future reference.

PACKAGE CONTENTS

Upon unpacking, please ensure all items listed below are present and in good condition:



Image: Gemilai Electric Conical Burr Coffee Grinder and Digital Coffee Scale Bundle.

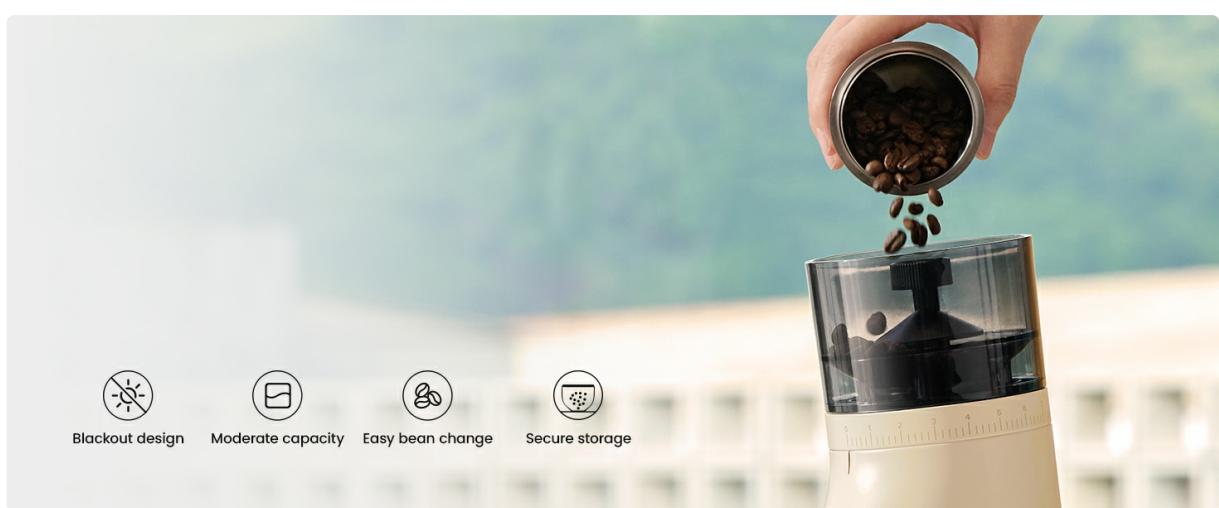


Image: Detailed diagram of the package contents, including the G9010B Coffee Grinder (Ivory White), Dosing Cup, Small

- G9010B Coffee Grinder (Ivory White)
- Dosing Cup
- Small Brush
- Instruction Manual (this document)
- User Guide
- Digital Coffee Scale
- Power Adapter

SETUP INSTRUCTIONS

Coffee Grinder Assembly

Before first use, ensure all packaging materials are removed. The grinder comes partially assembled. Refer to the diagram below for component identification.

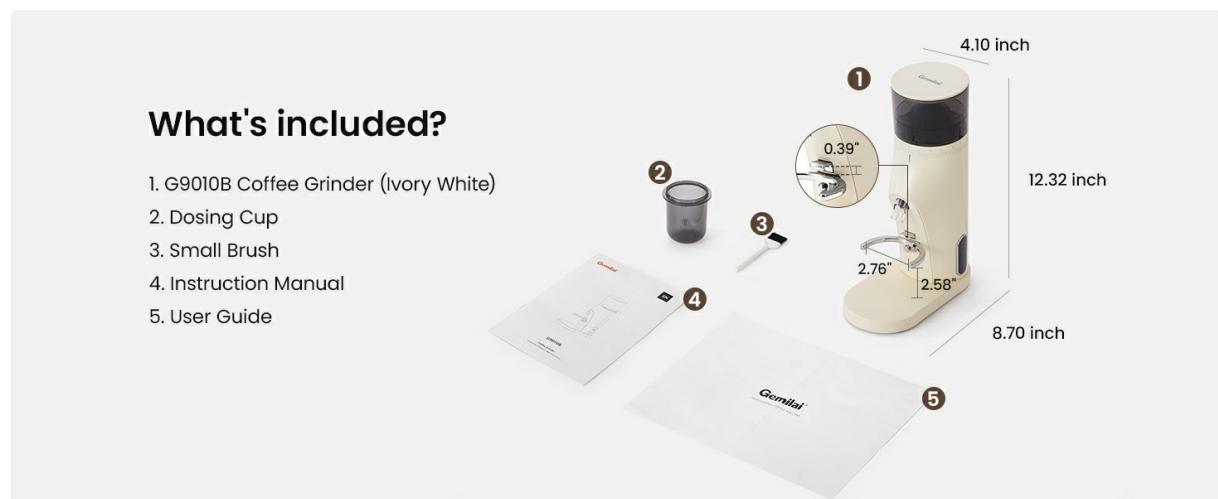


Image: Exploded view of the coffee grinder showing its main components: Magnet Hopper Lid, 80g Single-Dose Bean Hopper, Detachable Grinding Burrs, Rotary Grind Adjustment Disk, Sloped Powder Pouring, Smart Touch Screen Display, Filter Holder, Reinforced Non-Slip Foot, and 38mm Conical Burrs.

1. Place the grinder on a stable, flat surface.
2. Ensure the detachable grinding burrs are correctly seated within the grinder.
3. Place the 80g single-dose bean hopper on top of the burr assembly.
4. Secure the magnet hopper lid onto the bean hopper.
5. Connect the power adapter to the grinder's power port and plug it into a suitable electrical outlet.

Digital Coffee Scale Setup



Image: The Gmilai Digital Coffee Scale.

1. Place the digital coffee scale on a flat, level surface.
2. Ensure the scale has power (check for battery compartment or charging port if applicable, though not explicitly stated, it's standard for digital scales).
3. Press the power button to turn on the scale.

OPERATING THE COFFEE GRINDER

Adjusting Grind Settings

The Gmilai coffee grinder offers 60 micro-adjustment settings to achieve the perfect grind for your preferred brewing method. Rotate the grind adjustment disk to select your desired fineness.

Ensuring Rich Layers of Flavors



SUS420
Stainless Steel




120V DC Motor



150W Power



430rpm Speed

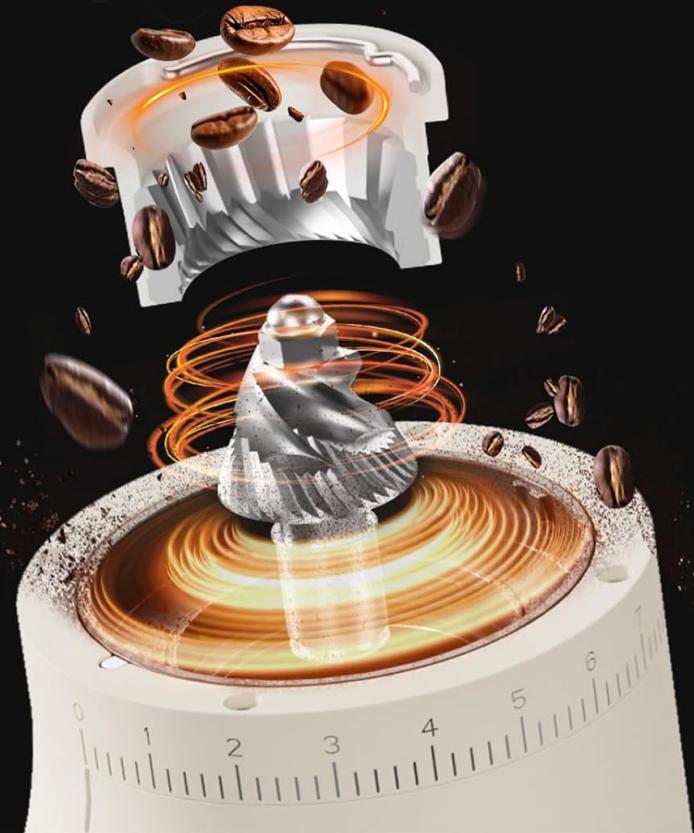


38mm Conical Burrs

Image: Visual guide to the 60 grind settings, indicating fineness levels for various brewing methods.

- **Fine Grind (Settings 3-6):** Ideal for Espresso.
- **Medium-Fine Grind (Settings 6-7):** Suitable for Mocha Pot.
- **Medium Grind (Settings 7-9):** Recommended for French Press.
- **Coarse Grind (Settings 10-12):** Best for Pour Over and Cold Brew.

Using Dual Modes (Manual & Timed)

The grinder features a smart touchscreen display with dual operating modes:

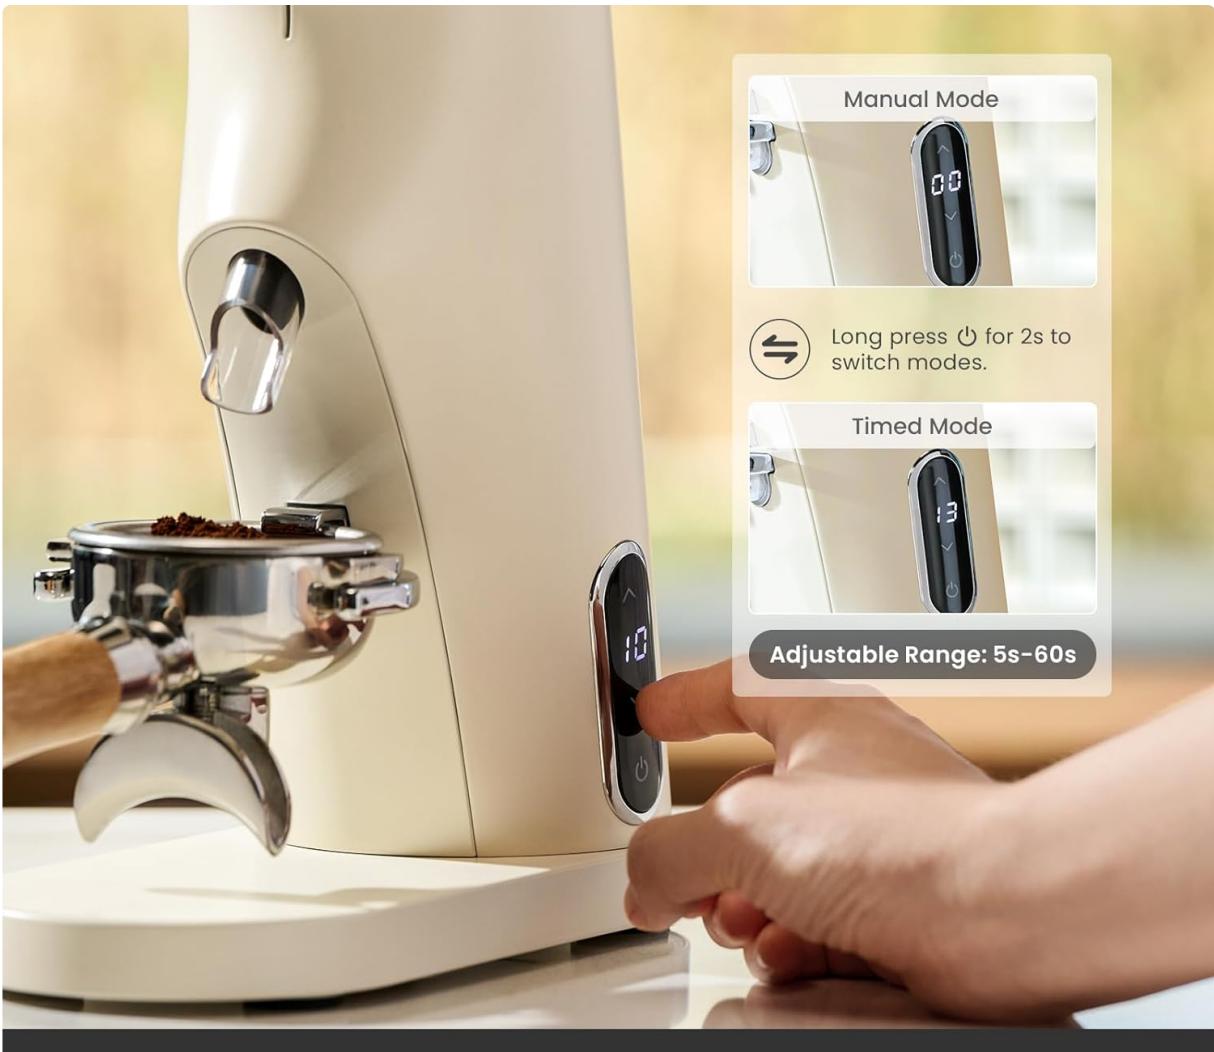

Dual-mode Touchscreen

Image: Touchscreen interface displaying options for Manual Mode and Timed Mode.

1. **Manual Mode:** Press the power button once to start grinding. Press again to stop.
2. **Timed Mode:** Long press the power button for 2 seconds to switch to Timed Mode. Use the up/down arrows to adjust the grinding time (adjustable range: 5s-60s). The grinder will automatically stop after the set time.
3. Load coffee beans into the hopper.
4. Place the dosing cup under the grinder's chute.
5. Select your desired mode and start grinding.

OPERATING THE DIGITAL COFFEE SCALE

The high-precision digital coffee scale ensures accurate measurements for consistent brewing results.

Daily Mode

Minimum accuracy to 0.1g

Manual Zero Timing

Weight Reset

High Precision Weighing

Image: Digital coffee scale showing its display and function buttons.

1. Place the scale on a stable, level surface.
2. Press the power button to turn on the scale.
3. Place your container (e.g., dosing cup) on the weighing platform.
4. Press the 'Tare' or 'Zero' button to reset the display to zero, accounting for the container's weight.
5. Add coffee beans or ground coffee to the container until the desired weight is reached. The scale provides accuracy up to 0.1g.
6. The scale may offer multiple weighing modes (e.g., grams, ounces). Refer to the scale's specific user guide for mode selection.

CARE AND MAINTENANCE

Regular cleaning ensures optimal performance and longevity of your Gemilai coffee grinder and scale.

Coffee Grinder Cleaning

Value 1 finest grind, value 12 coarsest grind



60 Scale Grind Setting

Image: Detachable burr assembly for easy cleaning.



Image: Important usage and maintenance tips for the coffee grinder.

- Always unplug the grinder before cleaning.
- Use the provided small brush to clean residual coffee grounds from the burrs and chute.
- Wipe the grinder's exterior with a damp cloth (wrung out).
- **DO NOT** rinse, immerse, or pour water or cleaning solutions directly into the machine.

- Ensure all parts are completely dry before reassembling and using the grinder.

Digital Coffee Scale Cleaning

- Wipe the scale's surface with a soft, damp cloth.
- Avoid using abrasive cleaners or submerging the scale in water.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Grinder does not turn on.	Not plugged in; power switch off.	Ensure power adapter is securely connected and plugged into a working outlet. Check the on/off switch on the back of the grinder.
Inconsistent grind.	Burrs are dirty or worn; incorrect grind setting.	Clean the burrs thoroughly. Adjust the grind setting to a finer or coarser level as needed.
Grinder stops during operation.	Overheating; bean hopper empty.	Allow the grinder to cool down for at least 30 minutes. Refill the bean hopper. Avoid continuous operation for more than 5 minutes.
Scale not displaying weight.	Low battery; unstable surface.	Ensure the scale has sufficient power. Place the scale on a flat, stable surface.

PRODUCT SPECIFICATIONS

Coffee Grinder

- **Model:** G9010B
- **Burr Type:** 38mm Conical Burr (SUS420 Stainless Steel)
- **Grind Settings:** 60 Micro-Adjustments
- **Motor Power:** 150W
- **Motor Speed:** 430rpm
- **Hopper Capacity:** 80g (Single-Dose)
- **Operation Modes:** Smart Timer & Manual
- **Weight:** 2.4kg (approx.)

Digital Coffee Scale

- **Maximum Capacity:** 2kg
- **Accuracy:** 0.1g
- **Features:** Multiple weighing modes, Manual Zero Timing, Weight Reset
- **Charging Port:** Type-C
- **Dimensions:** 90mm/3.54inch (width), 95mm/3.74inch (height), 19mm/0.75inch (thickness)

WARRANTY AND SUPPORT

Your Gmilai Electric Conical Burr Coffee Grinder & Digital Coffee Scales Bundle comes with a standard manufacturer's warranty. For detailed warranty information, product support, or service inquiries, please refer to the contact information provided in the separate User Guide or visit the official Gmilai website.

Online Support: [Visit the Gmilai Store on Amazon](#)

© 2025 Gmilai. All rights reserved.

This manual is for informational purposes only. Product specifications are subject to change without notice.