



Manuals.plus /

› Marcree /

› Marcree 8-10 Gun Safe User Manual

Marcree B3-10D-3

Marcree 8-10 Gun Safe User Manual

Model: B3-10D-3

IMPORTANT SAFETY INFORMATION

Read this manual thoroughly before operating your Marcree gun safe. Failure to follow these instructions may result in injury, damage to the safe, or unauthorized access to firearms. Always store firearms unloaded and locked away from children and unauthorized individuals.

- Ensure the safe is securely mounted to prevent tipping.
- Keep emergency keys in a secure location away from the safe and out of reach of children.
- Do not store flammable materials or explosives inside the safe.
- Regularly check the locking mechanism and battery levels.

PACKAGE CONTENTS

Verify that all items listed below are included in your package:

- 1x Marcree Large Gun Cabinet
- 2x Emergency Keys
- 4x Expansion Screws
- 1x Emergency Battery Box
- 1x User Manual
- 1x Screwdriver
- 1x Accessory Bag

PRODUCT DETAILS



Image: All components included in the Marcree gun safe package, laid out on a flat surface.

SETUP AND INSTALLATION

The Marcree gun safe is designed for convenient and flexible installation. It can be secured to a wall or floor using the provided expansion screws. Installation typically takes approximately 20 minutes.

Initial Opening (First-Time Use)

1. Open the silver cover on the electronic panel to reveal the emergency key slot.
2. Insert one of the emergency keys into the slot and turn it counter-clockwise.
3. While holding the key turned, rotate the round panel clockwise to open the safe door.

Your browser does not support the video tag.

Video: Demonstrates the initial unlocking process of the Marcree gun safe using the emergency key.

Mounting the Safe

The safe features five pre-drilled holes on the back and bottom for secure mounting. Use the provided expansion screws to fix the safe to a suitable wall or floor surface. Ensure the mounting surface is structurally sound to support the weight of the safe and its contents.

OPERATING INSTRUCTIONS

Unlocking Methods

The Marcree gun safe offers multiple unlocking methods for quick and reliable access:

- **Passcode Entry:** Use the digital keypad to enter your programmed 3-8 digit passcode.
- **Backup Keys:** In case of battery failure or forgotten passcode, use the emergency keys.
- **External Power Supply:** An emergency battery cable can be used to power the keypad if internal batteries are depleted.



Image: Visual representation of the three unlocking methods: passcode, key, and emergency battery box with knob.

Setting Your Passcode

1. With the safe door open, locate and press the setup button on the inside of the door. The left and right lights on the panel will flash alternately.
2. Enter your desired 3-8 digit password, then press the "#" key to confirm. After a drop sound, re-enter the same password followed by the "#" key to confirm. A long beep indicates successful setting.

Your browser does not support the video tag.

Video: Demonstrates how to set a new passcode for the Marcree gun safe.

Mute Function

To operate the safe quietly, activate the mute mode:

- Long press the number key "1" for more than three seconds. The left light on the panel will turn on, indicating mute mode is active.
- To cancel mute mode, long press the number key "1" again for more than three seconds. A long beep will confirm that mute mode has been canceled.



Image: Illustrates the silent mode feature and the password error alarm system.

Your browser does not support the video tag.

Video: Demonstrates how to activate and deactivate the mute function on the safe's keypad.

Alarm System

The safe is equipped with an intelligent alarm system for enhanced security:

- **Incorrect Password Alarm:** If an incorrect password is entered three consecutive times, the alarm system will activate and beep for 60 seconds.
- **Anti-Theft Alarm:** To activate the anti-theft alarm, press and hold the number key "9" for more than three seconds. The anti-theft alarm will turn on after a long beep. Violent hits or shaking of the safe will trigger this alarm.

Your browser does not support the video tag.

Video: Demonstrates the alarm system features, including incorrect password entry and anti-theft alarm activation.

PRODUCT FEATURES AND DETAILS

Capacity and Organization

The Marcree gun safe offers an extra-large capacity for comprehensive firearm storage. It can securely hold 8-10 rifles, 4 handguns, and a significant amount of ammunition.

- **Adjustable Gun Racks:** Three adjustable gun racks allow for flexible configuration to accommodate various firearm lengths.
- **Removable Partitions:** Partitions can be removed to create larger storage spaces as needed.
- **Pistol Storage Pouches:** Integrated pouches on the door provide convenient storage for handguns.
- **Ammo Bags:** Additional bags are included for ammunition storage.
- **High-Brightness LED Lighting:** Ensures clear visibility inside the safe, even in dim environments.



Image: Shows the interior of the safe with rifles and handguns, highlighting dimensions and capacity.

DETACHABLE BAFFLES AND ADJUSTABLE GUN RACKS



Image: Details the removable shelf and adjustable gun racks for customizable storage.

Security Features

The Marcee gun safe is constructed with military-grade protection to ensure maximum security:

- **Advanced Alloy Steel Construction:** Crafted from durable carbon steel for robust protection.
- **Thickened Solid Locking Bolts:** Features three thickened solid locking bolts for enhanced security.
- **Anti-Pry Design:** Engineered to resist prying attempts, safeguarding contents against unauthorized access.

Dependable Defense

Your Trusted Guardian

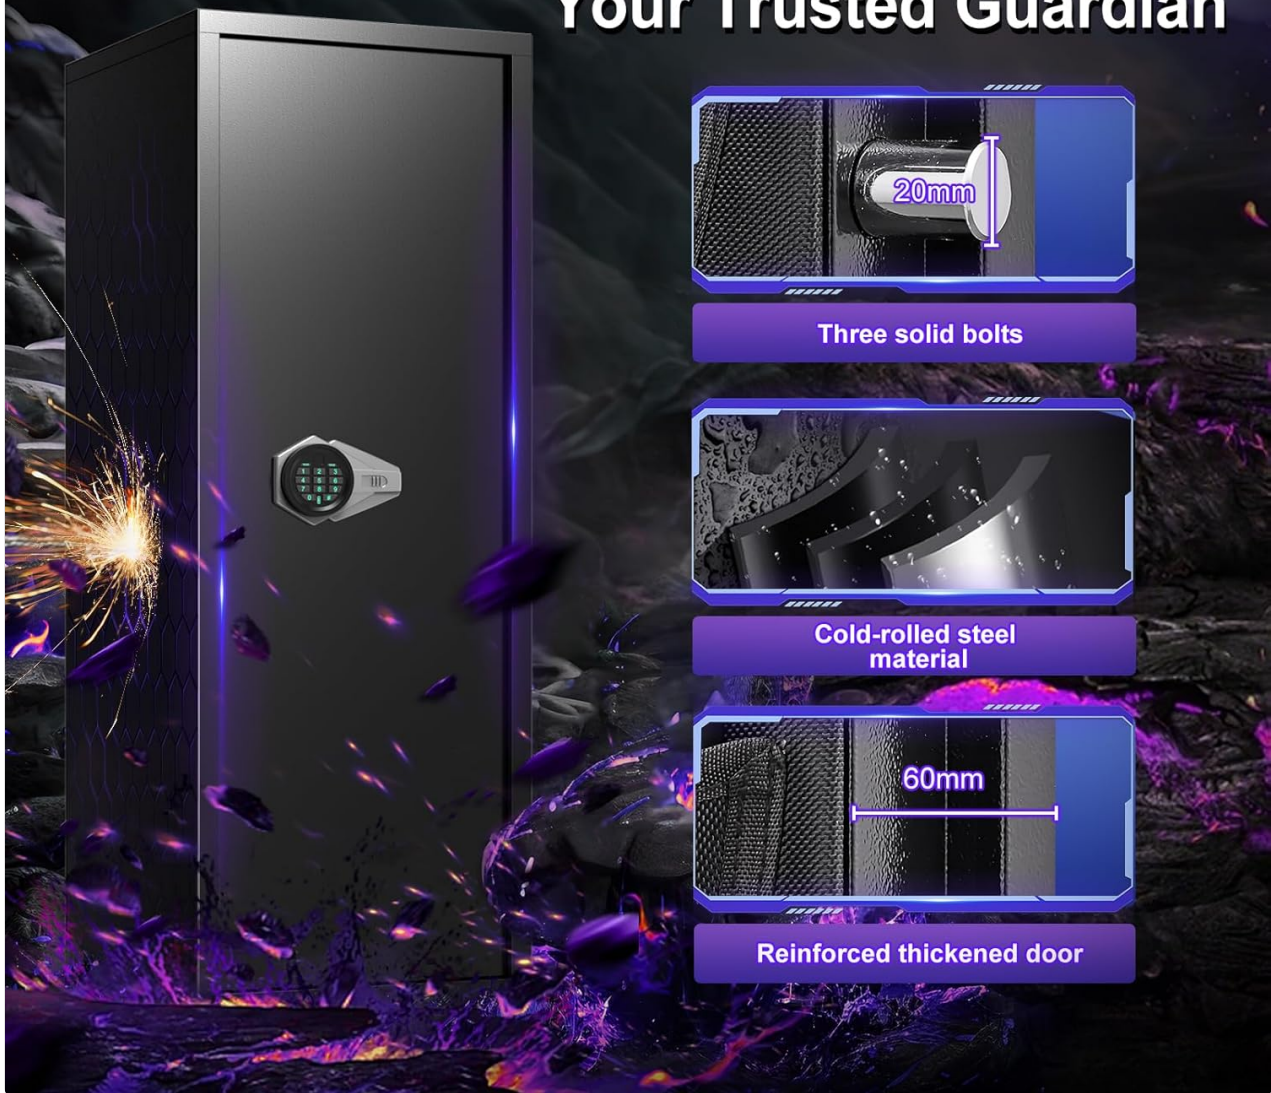


Image: Highlights the safe's robust construction, including three solid bolts, cold-rolled steel material, and reinforced thickened door.

MAINTENANCE

Proper maintenance ensures the longevity and reliable operation of your Marcree gun safe:

- **Cleaning:** Wipe the exterior of the safe with a soft, damp cloth. Avoid abrasive cleaners or solvents that could damage the finish.
- **Battery Replacement:** Replace the batteries in the electronic keypad annually, or immediately if the low battery indicator appears. Use high-quality alkaline batteries.
- **Lubrication:** Periodically apply a small amount of lubricant to the locking bolts and hinges to ensure smooth operation.
- **Inspection:** Regularly inspect the safe for any signs of wear, damage, or tampering. Ensure all bolts engage fully when the door is closed and locked.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Keypad is unresponsive.	Low or dead batteries.	Replace batteries or use the emergency battery cable.
Safe does not open after entering passcode.	Incorrect passcode entered; bolts are not fully retracted.	Ensure correct passcode is entered. Turn the knob fully after entering the code. If unsuccessful, use emergency key.
Alarm sounds unexpectedly.	Incorrect password attempts; anti-theft alarm triggered by impact/shaking.	Enter correct passcode to disarm. Avoid violent impact to the safe.
Door is stiff or difficult to open/close.	Lack of lubrication on hinges/bolts; obstruction.	Lubricate hinges and locking bolts. Check for any obstructions around the door frame.

SPECIFICATIONS

Brand	Marcree
Model Number	B3-10D-3
Product Dimensions	14.96"D x 17.71"W x 51.96"H
Lock Type	Electronic Combination Lock
Color	Black
Capacity	0.22 Cubic Meters (Holds 8-10 rifles, 4 handguns)
Material	Carbon Steel
Mounting Type	Wall Mount
Alarm	Audible (70dB)
Water Resistance Level	Not Water Resistant

WARRANTY AND SUPPORT

Marcree is committed to providing high-quality products and excellent customer service. If you encounter any issues during installation or daily use of your gun safe, please do not hesitate to contact our support team.

We offer professional one-on-one online guidance and support to ensure a worry-free experience with your new firearm storage solution.

Contact Information

For support, please refer to the contact details provided on the product packaging or the official Marcree website. Our team is available 24 hours a day to assist you.