

manuals.plus /

› [proscenic](#) /

› [Proscenic P15 Battery Vacuum Cleaner User Manual](#)

proscenic P15

Proscenic P15 Battery Vacuum Cleaner User Manual

Model: P15

1. PRODUCT OVERVIEW

The Proscenic P15 is a versatile battery-powered vacuum cleaner designed for efficient cleaning across various surfaces. It features powerful suction, an anti-tangle brush, an LED display, and a self-standing design for user convenience.



Image 1.1: Proscenic P15 Battery Vacuum Cleaner and included accessories. This image displays the main vacuum unit, extension wand, floor brush, and various smaller attachments like the crevice tool and dusting brush, highlighting its modular design.

2. SETUP AND ASSEMBLY

Follow these steps to assemble your Proscenic P15 vacuum cleaner:

1. **Unpack Components:** Carefully remove all parts from the packaging. Verify that all included components are present: main motor unit, extension wand, floor brush, battery, power adapter, charging dock, crevice tool, and dusting brush.
2. **Attach Extension Wand:** Connect the extension wand to the main motor unit until it clicks securely into place.
3. **Attach Floor Brush:** Connect the floor brush to the other end of the extension wand, ensuring it locks firmly.
4. **Install Battery:** Insert the battery into the designated slot on the main motor unit until it clicks.
5. **Initial Charging:** Before first use, fully charge the vacuum cleaner. Connect the power adapter to the charging dock, then place the vacuum cleaner on the dock. The LED display will indicate charging status. A full charge provides

approximately 70 minutes of runtime on minimal suction.



Image 2.1: The Proscenic P15 configured as a portable vacuum with various attachments. This image demonstrates the vacuum being used with a mattress brush (sold separately), a crevice tool for tight spaces, and a 2-in-1 dusting brush for car interiors, showcasing its adaptability.

3. OPERATING INSTRUCTIONS

Powering On/Off and Suction Modes

Press the power button to turn the vacuum cleaner on or off. Use the mode selection button on the LED display to cycle through the available suction modes:

- **Floor Mode:** Approximately 30,000 PA suction for general hard floor cleaning.
- **Carpet Mode:** Approximately 45,000 PA suction for carpets and rugs.
- **Turbo Mode:** Up to 55,000 PA suction for maximum cleaning power on stubborn dirt.



Transforms into a portable vacuum cleaner.

2-in-1 brush/crevice tool instantly converts it for whole-home & car cleaning

Image 3.1: Close-up of the Proscenic P15's digital LED screen. The display shows the current suction mode (Floor, Carpet, Turbo), battery percentage, and indicators for brush blockage, providing real-time operational feedback.

LED Display Functions

The intelligent HD color LED touch screen provides real-time information:

- **Battery Status:** Displays the remaining battery percentage.
- **Suction Mode:** Indicates the currently selected power level.

- **Brush Blockage:** Alerts if the brush roll is obstructed.

Green LED Headlights

The floor brush is equipped with green LED headlights that illuminate dark areas, making fine dust particles and debris visible for thorough cleaning.



Self-Standing Design

No leaning, no hassle - self-locks upright and unlocks with a gentle step

Image 3.2: The Proscenic P15's green LED headlights in action, highlighting dust and debris on a hard floor. This feature enhances visibility in dimly lit areas, ensuring no particles are missed during cleaning.

Self-Standing Design

The vacuum cleaner features a self-standing design, allowing it to remain upright independently. This is convenient for pausing cleaning or for storage.



Image 3.3: The Proscenic P15 demonstrating its self-standing capability. The vacuum is shown upright and stable, allowing for convenient pauses during cleaning without needing to lean it against a wall or furniture.

4. MAINTENANCE

Emptying the Dust Container

The dust container has a capacity of 1.2 liters. To maintain optimal suction, empty the dust container regularly, especially when it reaches the MAX fill line. Detach the dust container from the main unit and press the release button to open the bottom flap and dispose of debris.

Cleaning Filters

The Proscenic P15 utilizes a 6-layer high-density filtration system, including a HEPA filter, which captures up to 99.99% of fine dust and allergens. For best performance, clean the filters periodically:

- Remove the filter assembly from the dust container.
- Tap off loose dust over a waste bin.
- Rinse washable filter components under cold running water until the water runs clear.
- Allow all filter parts to air dry completely for at least 24 hours before reassembling. Do not use heat to dry.

Cleaning the Anti-Tangle Brush

The V-shaped anti-tangle brush is designed to minimize hair tangles. However, occasional cleaning may be necessary:

- Turn off the vacuum and detach the floor brush.
- Locate the brush roll release mechanism and remove the brush roll.
- Use scissors or the included cleaning tool to cut and remove any tangled hair or fibers.
- Reinsert the brush roll and secure it in place.

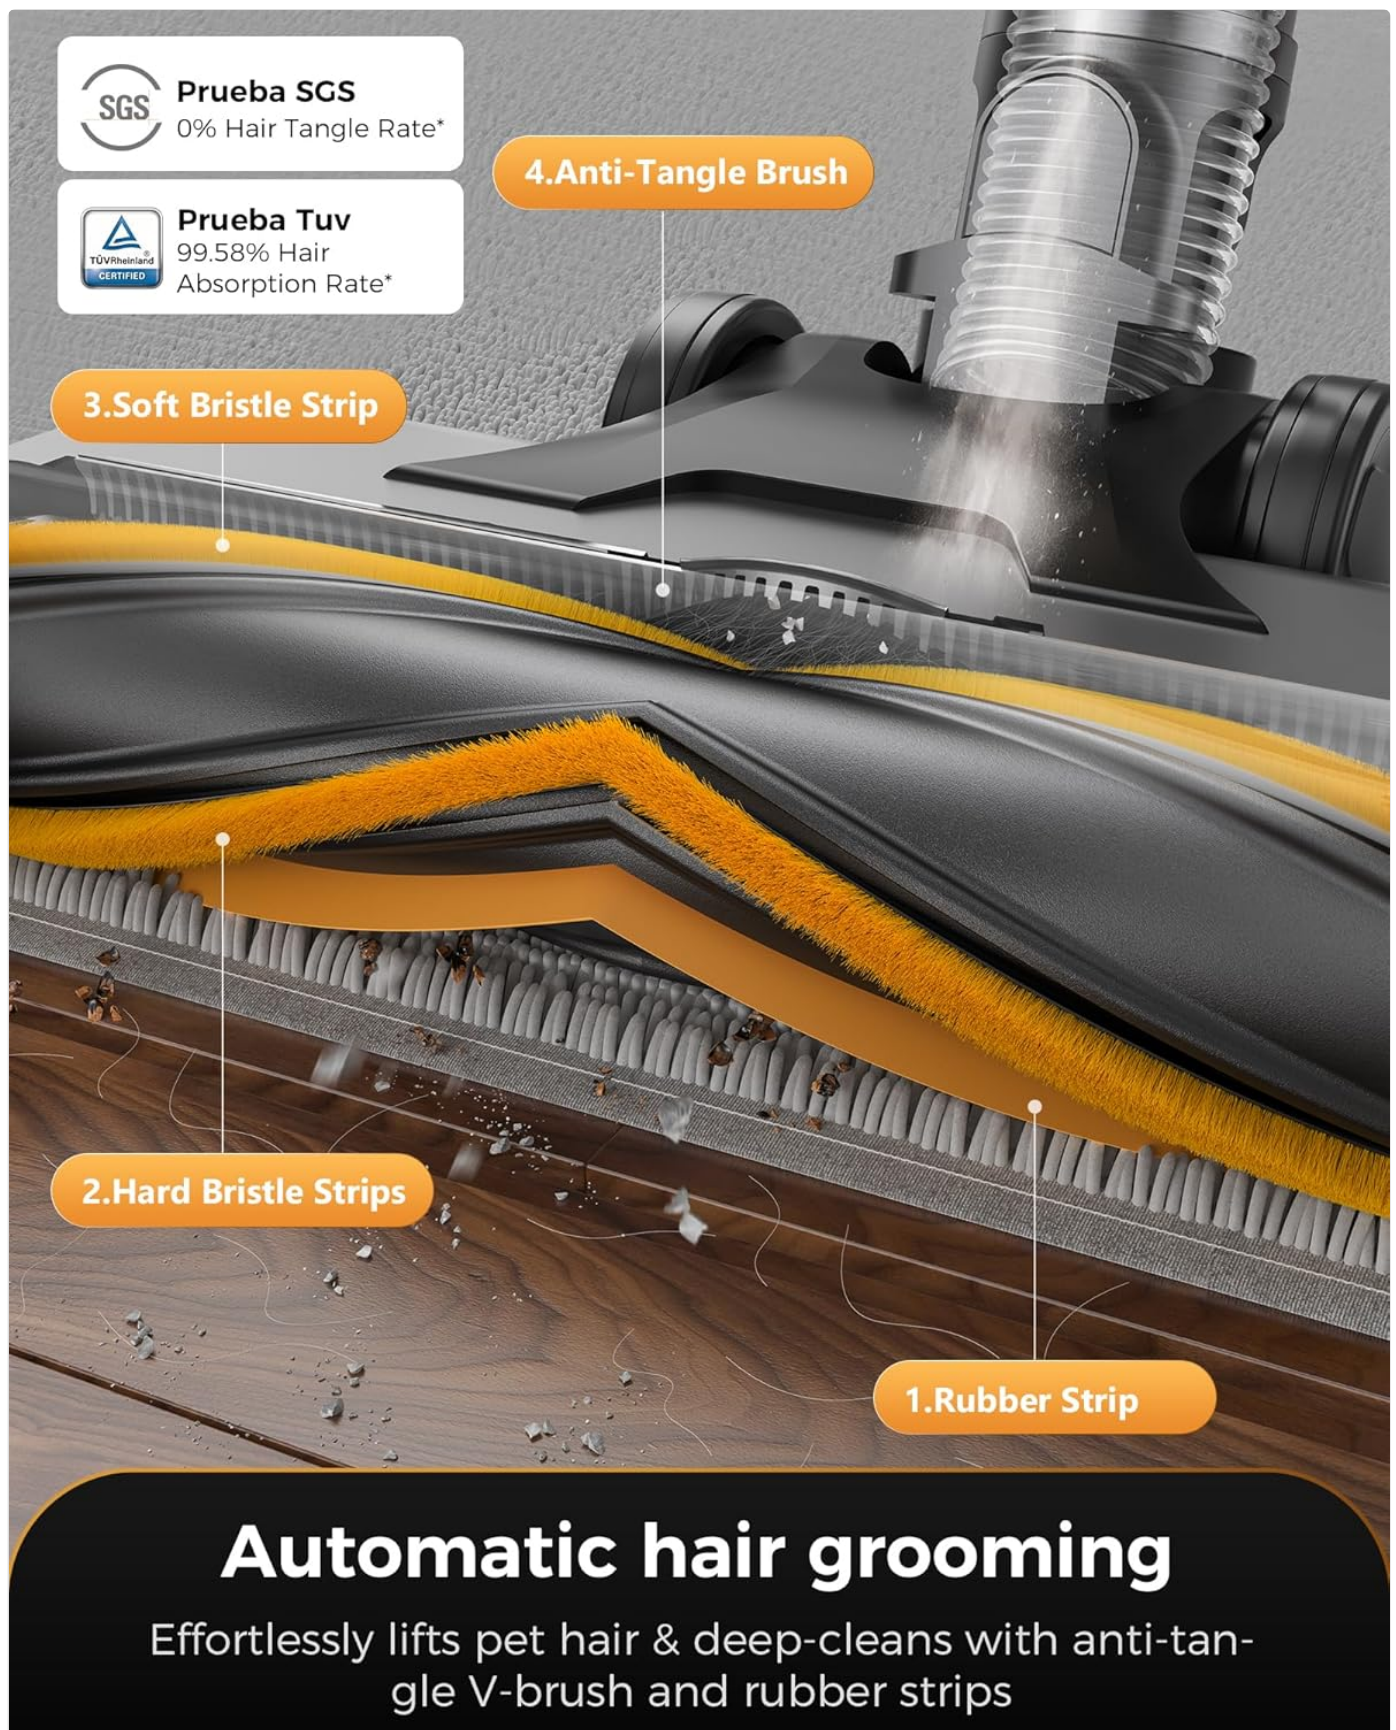


Image 4.1: Detailed view of the Proscenic P15's anti-tangle brush system. This image highlights the V-shaped design, hard and soft bristle strips, and rubber strips, which work together to prevent hair tangles and effectively lift debris.

5. TROUBLESHOOTING

If you encounter issues with your Proscenic P15, refer to the following common problems and solutions:

- **No Power:**

- Ensure the battery is fully charged.
 - Check if the battery is correctly installed.
 - Verify the power adapter is properly connected during charging.
- **Reduced Suction:**
 - Empty the dust container if it is full.
 - Clean the filters as described in the Maintenance section.
 - Check the brush roll for any blockages or tangled hair.
 - Ensure all connections (wand, floor brush) are secure.
 - **Brush Roll Not Spinning:**
 - Remove any obstructions from the brush roll.
 - Ensure the brush roll is correctly installed.
 - Check the LED display for any brush blockage alerts.
 - **Short Battery Runtime:**
 - Ensure the battery is fully charged before use.
 - Runtime varies by suction mode; Turbo mode consumes battery faster.
 - Battery performance may decrease over time with prolonged use.

If the issue persists, please contact customer support.

6. SPECIFICATIONS

Feature	Specification
Model	P15
Brand	Proscenic
Motor Wattage	600 W
Suction Power	Up to 55,000 PA (Turbo Mode)
Battery	8-cell, 2500 mAh
Runtime	Up to 70 minutes (on minimal suction)
Dust Container Capacity	1.2 Liters
Filtration System	6-layer high-density, HEPA filter
Voltage	29.6 Volts
Special Features	Anti-Tangle Brush, Green LED Headlights, HD Color LED Touch Screen, Self-Standing Design, Retractable Brush Tube
Included Components	Accessory Kit, Adapter, Charging Dock, Crevice Tool, Dusting Brush, Side Brushes

8x2200mAh

70 Mins

230 m²

70-Minute Ultra-Long Runtime

Cleans a larger area on a single charge

Image 6.1: Diagram illustrating the Proscenic P15's 600W powerful brushless motor. This visual explains how the motor effectively separates air and dust, maintaining strong suction power with reduced loss.

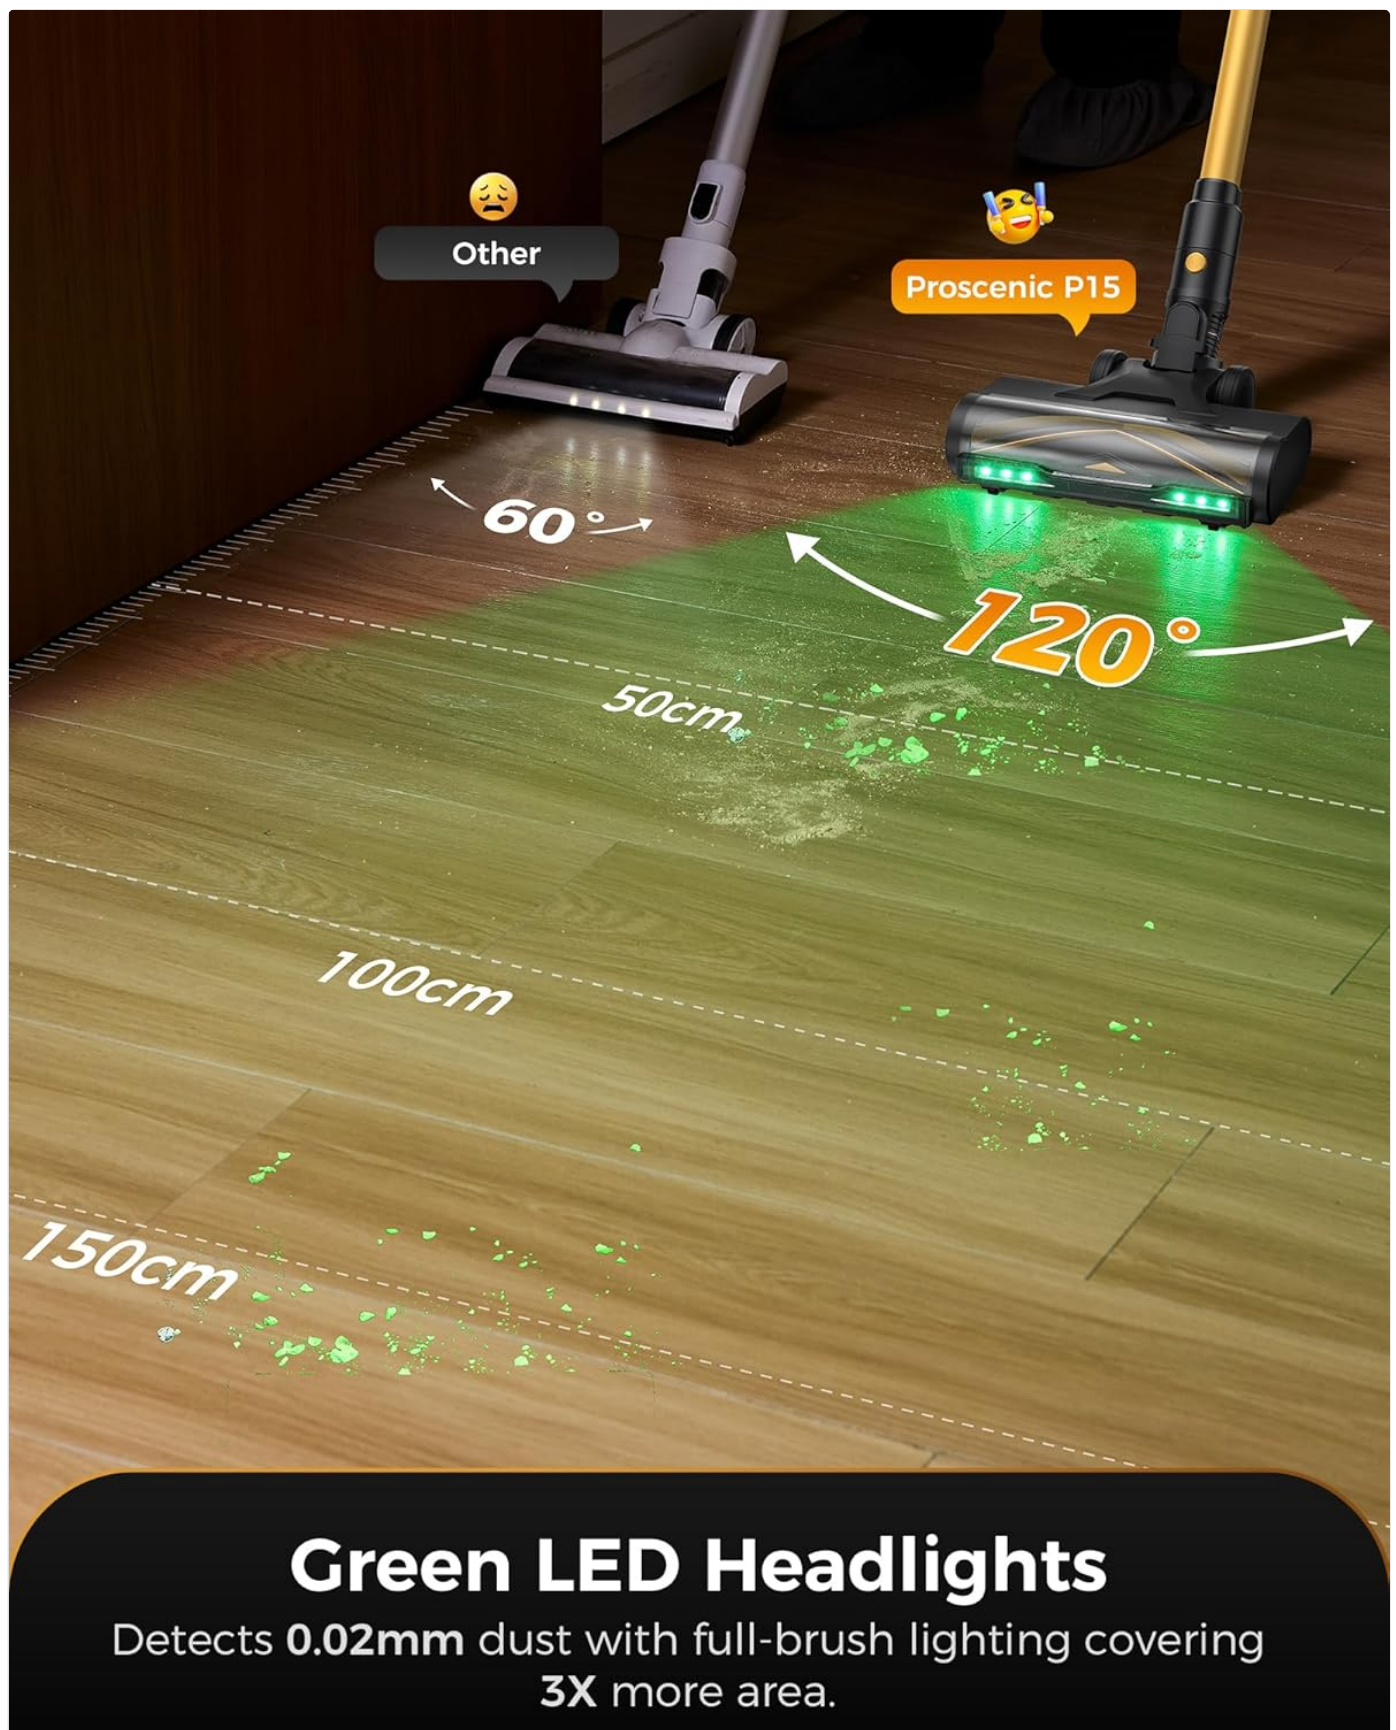


Image 6.2: Illustration depicting the Proscenic P15's 70-minute ultra-long runtime. The image shows the vacuum being used in a large living space, indicating its capability to clean extensive areas on a single charge, powered by an 8x2200mAh battery.

7. WARRANTY AND SUPPORT

Warranty Information

The Proscenic P15 Battery Vacuum Cleaner comes with a **2-year warranty** from the date of purchase. Please retain your

proof of purchase for warranty claims.

Customer Support

For technical assistance, troubleshooting, or warranty inquiries, please contact Proscenic customer support:

- Email: support@proscenic.com
- Website: www.proscenic.com

Proscenic is committed to providing 7x24 hours customer support.

Manufacturer: Shenzhen Proscenic Technology Co., Ltd.
Suzhou Clean-well Appliance Co.,Ltd (Authorized)
Add: No.79, Tongxin Road, Suzhou New District, Suzhou City, Jiangsu, China

UK REP **Goal Reach Consulting Ltd.**
Office 1029, 3 Hardman Street, 10th Floor, Spinningfields, Manchester M3 3HF, UK
E-mail: goalservice@hotmail.com

EC REP **ULT Europe GmbH**
Kreuzstraße 60, Düsseldorf, North Rhine-Westphalia, 40210, Germany
E-mail: support@proscenic.com

Made in China
To ensure you get better customer support guarantee
 www.proscenic.com
We are always here to protect your rights
 support@proscenic.com

@Proscenic @proscenic_official @Proscenicglobal @Proscenic @proscenic.official

The product images are for illustration purposes only. Actual product may vary.

EN ▲ Pay attention to electrical safety, keep the product away from fire sources.

DE ▲ Sie auf elektrische Sicherheit, halten Sie das Produkt von Feuerquellen fern.

FR ▲ Faites attention à la sécurité électrique, gardez le produit loin des sources de feu.

IT ▲ Attenzione alla sicurezza elettrica, mantare il prodotto lontano da fonti di fuoco.

ES ▲ Atención a la electricidad y mantenga el producto alejado de todo fuego.

PL ▲ Zwróć uwagę na bezpieczeństwo elektryczne, trzymaj produkt z dala od źródeł ognia.






NL ▲ Let op elektrische veiligheid, houd het product uit de buurt van vuurbronnen.

Image 7.1: Manufacturer and support information for Proscenic products. This image provides details on the manufacturer, authorized representatives, customer support email, official website, and various product certifications (CE, FC, UKCA, PS, RoHS).

Related Documents - P15

Proscenic P11 Series Cordless Vacuum Cleaner: User Manual, Instructions, and Troubleshooting

Detailed user manual for the Proscenic P11 Series cordless vacuum cleaner. Find instructions on setup, operation, charging, maintenance, accessory use, troubleshooting common issues, and technical specifications. Keep your Proscenic P11 running optimally.

	<p>Proscenic P10 Pro Cordless Cleaner User Manual</p> <p>User manual for the Proscenic P10 Pro Cordless Cleaner, a 4-in-1 stick vacuum featuring 26Kpa suction, adjustable modes, LED touch screen, removable battery, and anti-tangle technology. Includes safety instructions regarding chargers and batteries.</p>
	<p>Proscenic P15 Cordless Vacuum Cleaner User Manual</p> <p>Detailed user manual for the Proscenic P15 Cordless Vacuum Cleaner, covering safety instructions, assembly, operation, maintenance, and troubleshooting for optimal use.</p>
	<p>Proscenic Robot Vacuum User Manual</p> <p>This user manual provides comprehensive instructions for setting up, operating, and maintaining the Proscenic robot vacuum cleaner, including safety precautions, cleaning modes, scheduling, troubleshooting, and FAQ.</p>
	<p>Proscenic P9 Cordless Vacuum Cleaner Operating Manual</p> <p>Comprehensive operating manual for the Proscenic P9 cordless vacuum cleaner, including safety instructions, usage guides, maintenance, troubleshooting, and warranty information.</p>
	<p>Proscenic BL828 Robot Vacuum Cleaner User Manual</p> <p>Comprehensive user manual for the Proscenic BL828 robot vacuum cleaner, covering setup, operation, maintenance, and specifications. Learn how to use your BL828 and 811GB model effectively.</p>