

[Manuals.plus](#) /

› [Perixx](#) /

› Perixx PERIBOARD-832M Wireless Mini Backlit Keyboard User Manual

Perixx PERIBOARD-832M

Perixx PERIBOARD-832M Wireless Mini Backlit Keyboard User Manual

Model: PERIBOARD-832M

INTRODUCTION

Thank you for choosing the Perixx PERIBOARD-832M Wireless Mini Backlit Keyboard. This manual provides essential information for setting up, operating, and maintaining your keyboard. Please read it carefully to ensure optimal performance and longevity of your device.



Image: The Perixx PERIBOARD-832M wireless mini backlit keyboard, showcasing its compact design and white finish.

KEY FEATURES

- **Stable and Fast Bluetooth Connection:** Utilizes Bluetooth 5.1 technology for reliable pairing with macOS devices, including MacBook, iMac, and iPad, without requiring adapters.
- **Compact and Modern Design:** Measuring 285 x 116 x 21 mm and weighing only 340 g, it is ideal for small workspaces or mobile use. Features a high-quality ABS frame for durability and an elegant appearance.
- **Comfortable and Quiet Typing:** Equipped with scissor-switch keys offering 1.6 mm travel for precise and silent typing, even during extended sessions. Keys are rated for 3 million presses.
- **4-Level Adjustable Backlight:** Features a white LED backlight with four intensity levels (Off, 25%, 50%, 100%) to ensure visibility in various lighting conditions. Includes an automatic shutdown feature for energy saving.
- **Long-Lasting Rechargeable Battery:** Integrated 780 mAh Li-Po battery charges via USB-C in approximately 3 hours, providing up to 10 days of battery life. Includes multimedia function keys optimized for macOS.



Image: A close-up view of the keyboard highlighting the scissor-switch key mechanism and compact design.

SETUP GUIDE

1. Charging the Keyboard

Before initial use, fully charge the keyboard. Connect the provided USB-C cable to the keyboard's charging port and the other end to a USB power source (e.g., computer, USB wall adapter).

- A full charge takes approximately 3 hours.
- The charging indicator light will show charging status (refer to LED indicator section for details).



Image: The rear side of the keyboard, illustrating the location of the USB-C charging port.

2. Bluetooth Pairing

Follow these steps to pair your PERIBOARD-832M with your macOS device:

1. Ensure the keyboard is charged and powered on.
2. Press and hold the **Fn** key and one of the Bluetooth channel keys (**Q**, **W**, or **E**) for 3-5 seconds until the Bluetooth indicator light starts blinking rapidly. This indicates the keyboard is in pairing mode.
3. On your macOS device, go to **System Settings** (or **System Preferences**) > **Bluetooth**.
4. Turn on Bluetooth and wait for "PERIBOARD-832M" to appear in the list of available devices.
5. Click on "PERIBOARD-832M" to initiate the pairing process.
6. If prompted, enter the displayed code on the keyboard and press **Enter**.
7. Once paired, the Bluetooth indicator light on the keyboard will stop blinking and remain solid for a few seconds before turning off.

You can pair up to three devices and switch between them using **Fn + Q/W/E**.

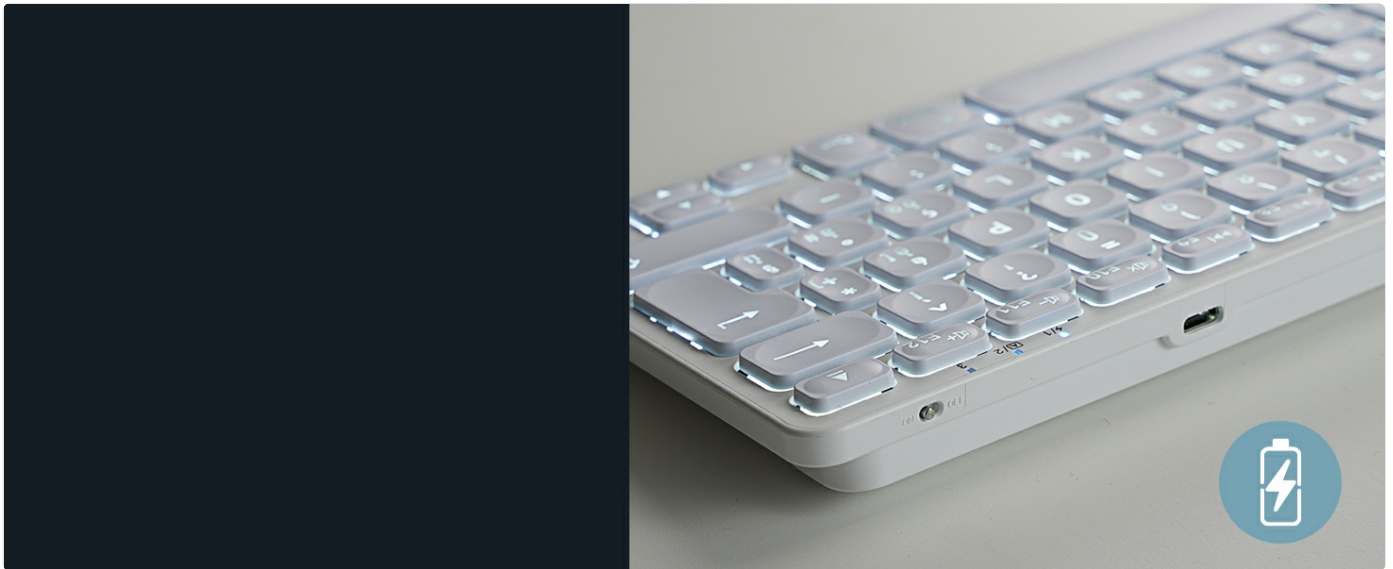


Image: The keyboard displaying the Bluetooth icon, signifying its readiness for wireless pairing.

OPERATING INSTRUCTIONS

Backlight Control

The PERIBOARD-832M features an adjustable white LED backlight:

- Press **Fn + F5** to decrease backlight intensity.
- Press **Fn + F6** to increase backlight intensity.
- There are 4 levels: Off, 25%, 50%, and 100%.
- The backlight will automatically turn off after a period of inactivity to conserve battery.

Multimedia Function Keys

The keyboard includes dedicated multimedia function keys optimized for macOS. These keys are typically accessed by pressing the **Fn** key in combination with the corresponding F-keys (F1-F12).

Key Combination	Function
Fn + F1	Decrease Display Brightness
Fn + F2	Increase Display Brightness
Fn + F3	Mission Control
Fn + F4	Launchpad
Fn + F5	Decrease Backlight Intensity
Fn + F6	Increase Backlight Intensity
Fn + F7	Previous Track
Fn + F8	Play/Pause
Fn + F9	Next Track
Fn + F10	Mute Volume
Fn + F11	Decrease Volume

Key Combination	Function
Fn + F12	Increase Volume



Image: A user actively typing on the keyboard, illustrating its ergonomic design and key layout during operation.

MAINTENANCE

To ensure the longevity and optimal performance of your Perixx PERIBOARD-832M, follow these maintenance guidelines:

- **Cleaning:** Use a soft, lint-free cloth slightly dampened with water or a mild cleaning solution to wipe the surface of the keyboard. Avoid harsh chemicals, abrasive cleaners, or excessive moisture.
- **Dust Removal:** Use compressed air to remove dust and debris from between the keys.
- **Storage:** When not in use for extended periods, store the keyboard in a cool, dry place away from direct sunlight and extreme temperatures.
- **Avoid Spills:** Keep liquids away from the keyboard to prevent damage to internal components.

TROUBLESHOOTING

If you encounter issues with your PERIBOARD-832M, refer to the following common problems and solutions:

Problem	Solution
Keyboard does not turn on.	Ensure the keyboard is charged. Connect it to a USB-C power source and allow it to charge for at least 30 minutes before attempting to turn it on again.
Cannot pair via Bluetooth.	◦ Ensure the keyboard is in pairing mode (Bluetooth indicator blinking). ◦ Check that Bluetooth is enabled on your macOS device. ◦ Remove any previous "PERIBOARD-832M" entries from your device's Bluetooth list and try pairing again. ◦ Restart both the keyboard and your macOS device.
Keys are unresponsive or typing incorrectly.	◦ Check battery level and recharge if necessary. ◦ Ensure the keyboard is within range of your macOS device (typically up to 10 meters). ◦ Try re-pairing the keyboard. ◦ Clean any debris from under the keys using compressed air.
Backlight is not working.	◦ Ensure the backlight is not set to "Off" (press Fn + F6 to increase intensity). ◦ Check battery level; low battery may disable backlight to conserve power.

SPECIFICATIONS

Feature	Detail
Brand	Perixx
Model	PERIBOARD-832M
Connectivity Technology	Bluetooth 5.1
Compatible Devices	MacBook, iMac, iPad (macOS 11 Big Sur or later)
Keyboard Layout	Italian QWERTY
Key Switch Type	Scissor-switch
Number of Keys	104
Special Features	Adjustable Backlight (4 levels), Multimedia Function Keys
Power Source	Rechargeable Li-Po Battery (780 mAh), USB-C Charging
Battery Life	Up to 10 days (usage dependent)
Product Dimensions (L x W x H)	285 x 116 x 21 mm
Weight	340 g
Material	ABS Plastic

Feature	Detail
Country of Origin	China

WARRANTY INFORMATION

The Perixx PERIBOARD-832M comes with a **2-year product warranty** from the date of purchase. This warranty covers manufacturing defects and material faults under normal use. Please retain your proof of purchase for warranty claims. For detailed warranty terms and conditions, please refer to the official Perixx website or contact customer support.

CUSTOMER SUPPORT

For further assistance, technical support, or inquiries regarding your Perixx PERIBOARD-832M, please visit the official Perixx website or contact their customer service department. You can often find FAQs, driver downloads, and contact information on their support pages.

Official Perixx Store: [Perixx Amazon Store](#)